


GARMIN[®]

G1000[®] NXi

Pilot's Guide

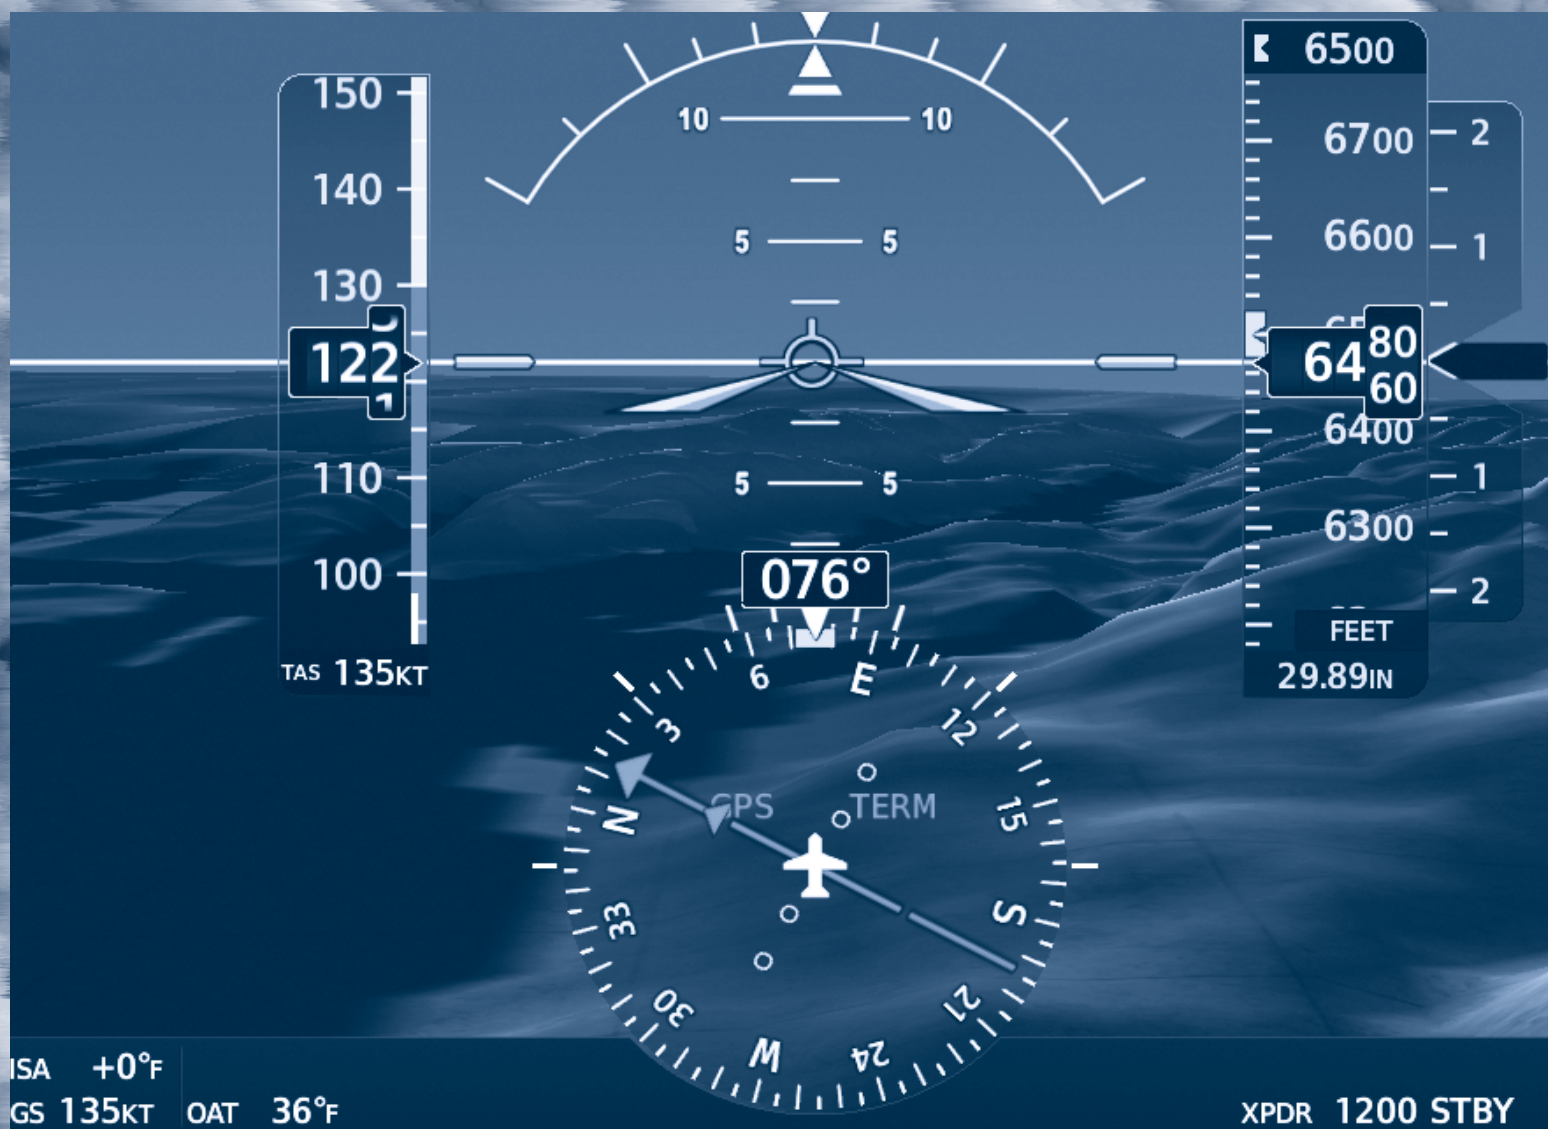

Diamond DA40NG
System Software Version 1929.11 or later

SYSTEM OVERVIEW

FLIGHT INSTRUMENTS

EIS

AUDIO & CNS

FLIGHT MANAGEMENT

HAZARD AVOIDANCE

AFCS

ADDITIONAL FEATURES

APPENDICES

INDEX

Copyright © 2018, 2021 Garmin Ltd. or its subsidiaries. All rights reserved.

This manual reflects the operation of System Software version 1929.11 or later for the Diamond DA40NG. Some differences in operation may be observed when comparing the information in this manual to earlier or later software versions.

Garmin International, Inc.
1200 East 151st Street
Olathe, Kansas 66062, U.S.A.

Garmin (Europe) Ltd.
Liberty House, Hounsdown Business Park
Southampton, Hampshire SO40 9LR U.K.

Garmin AT, Inc.
2345 Turner Road SE
Salem, OR 97302, U.S.A.

Garmin Corporation
No. 68, Zhangshu 2nd Road
Xizhi District, New Taipei City, Taiwan

Contact Garmin Product Support or view warranty information at flygarmin.com.

Except as expressly provided herein, no part of this manual may be reproduced, copied, transmitted, disseminated, downloaded or stored in any storage medium, for any purpose without the express written permission of Garmin. Garmin hereby grants permission to download a single copy of this manual and of any revision to this manual onto a hard drive or other electronic storage medium to be viewed for personal use, provided that such electronic or printed copy of this manual or revision must contain the complete text of this copyright notice and provided further that any unauthorized commercial distribution of this manual or any revision hereto is strictly prohibited.

Garmin® G1000® NXi, FliteCharts®, and SafeTaxi® are registered trademarks of Garmin International, Inc. or its subsidiaries. Garmin ESP™, Garmin SVT™, Connex™, and WireAware™ are trademarks of Garmin International, Inc. or its subsidiaries. These trademarks may not be used without the express permission of Garmin.

Skywatch® and Stormscope® are registered trademarks of L-3 Communications. Ryan®, TCAD® and Avidyne® are registered trademarks of Avidyne Corporation. CO Guardian is a trademark of CO Guardian, Inc. AC-U-KWIK® is a registered trademark of Penton Business Media Inc. Bendix/King® and Honeywell® are registered trademarks of Honeywell International, Inc. Becker® is a registered trademark of Becker Flugfunkwerk GmbH. NavData® is a registered trademark of Jeppesen, Inc.; Wi-Fi® is a registered trademark of the Wi-Fi Alliance. Sirius, XM, and all related marks and logos are trademarks of Sirius XM Radio, Inc. and its subsidiaries. The Bluetooth® word mark and logos are owned by the Bluetooth SIG, Inc. and any use of such marks by Garmin is under license.

AOPA Membership Publications, Inc. and its related organizations (hereinafter collectively "AOPA") expressly disclaim all warranties, with respect to the AOPA information included in this data, express or implied, including, but not limited to, the implied warranties of merchantability and fitness for a particular purpose. The information is provided "as is" and AOPA does not warrant or make any representations regarding its accuracy, reliability, or otherwise. Under no circumstances including negligence, shall AOPA be liable for any incidental, special or consequential damages that result from the use or inability to use the software or related documentation, even if AOPA or an AOPA authorized representative has been advised of the possibility of such damages. User agrees not to sue AOPA and, to the maximum extent allowed by law, to release and hold harmless AOPA from any causes of action, claims or losses related to any actual or alleged inaccuracies in the information. Some jurisdictions do not allow the limitation or exclusion of implied warranties or liability for incidental or consequential damages so the above limitations or exclusions may not apply to you.

AC-U-KWIK and its related organizations (hereafter collectively "AC-U-KWIK Organizations") expressly disclaim all warranties with respect to the AC-U-KWIK information included in this data, express or implied, including, but not limited to, the implied warranties of merchantability and fitness for a particular purpose. The information is provided "as is" and AC-U-KWIK Organizations do not warrant or make any representations regarding its accuracy, reliability, or otherwise. Licensee agrees not to sue AC-U-KWIK Organizations and, to the maximum extent allowed by law, to release and hold harmless AC-U-KWIK Organizations from any cause of action, claims or losses related to any actual or alleged inaccuracies in the information arising out of Garmin's use of the information in the datasets. Some jurisdictions do not allow the limitation or exclusion of implied warranties or liability for incidental or consequential damages so the above limitations or exclusions may not apply to licensee.

Printed in the U.S.A.



WARNING: Do not use terrain avoidance displays as the sole source of information for maintaining separation from terrain and obstacles. Garmin obtains terrain and obstacle data from third party sources and cannot independently verify the accuracy of the information.



WARNING: Always refer to current aeronautical charts and NOTAMs for verification of displayed aeronautical information. Displayed aeronautical data may not incorporate the latest NOTAM information.



WARNING: Do not use geometric altitude for compliance with air traffic control altitude requirements. The primary barometric altimeter must be used for compliance with all air traffic control altitude regulations, requirements, instructions, and clearances.



WARNING: Do not use basemap information (land and water data) as the sole means of navigation. Basemap data is intended only to supplement other approved navigation data sources and should be considered only an aid to enhance situational awareness.



WARNING: Do not rely solely upon the display of traffic information to accurately depict all of the traffic within range of the aircraft. Due to lack of equipment, poor signal reception, and/or inaccurate information from aircraft or ground stations, traffic may be present that is not represented on the display.



WARNING: Do not use data link weather information for maneuvering in, near, or around areas of hazardous weather. Information contained within data link weather products may not accurately depict current weather conditions.



WARNING: Do not use the indicated data link weather product age to determine the age of the weather information shown by the data link weather product. Due to time delays inherent in gathering and processing weather data for data link transmission, the weather information shown by the data link weather product may be older than the indicated weather product age.



WARNING: Do not rely on the displayed minimum safe altitude (MSAs) as the sole source of obstacle and terrain avoidance information. Always refer to current aeronautical charts for appropriate minimum clearance altitudes.



WARNING: Do not operate this equipment without first obtaining qualified instruction.



WARNING: Do not use a QFE altimeter setting with this system. System functions will not operate properly with a QFE altimeter setting. Use only a QNH altimeter setting for height above mean sea level, or the standard pressure setting, as applicable.



WARNING: Do not use GPS to navigate to any active waypoint identified as a 'NON WGS84 WPT' by a system message. 'NON WGS84 WPT' waypoints are derived from an unknown map reference datum that may be incompatible with the map reference datum used by GPS (known as WGS84) and may be positioned in error as displayed.



WARNING: Do not rely on the autopilot to level the aircraft at the MDA/DH when flying an approach with vertical guidance. The autopilot will not level the aircraft at the MDA/DH even if the MDA/DH is set in the altitude preselect.



WARNING: Do not rely solely upon the display of traffic information for collision avoidance maneuvering. The traffic display does not provide collision avoidance resolution advisories and does not under any circumstances or conditions relieve the pilot's responsibility to see and avoid other aircraft.



WARNING: Do not rely on the accuracy of attitude and heading indications in the following geographic areas (due to variations in the earth's magnetic field): North of 72° North latitude at all longitudes; South of 70° South latitude at all longitudes; North of 65° North latitude between longitude 75° W and 120° W. (Northern Canada); North of 70° North latitude between longitude 70° W and 128° W. (Northern Canada); North of 70° North latitude between longitude 85° E and 114° E. (Northern Russia); South of 55° South latitude between longitude 120° E and 165° E. (Region south of Australia and New Zealand).



WARNING: Do not rely on information from a lightning detection system display as the sole basis for hazardous weather avoidance. Range limitations and interference may cause the system to display inaccurate or incomplete information. Refer to documentation from the lightning detection system manufacturer for detailed information about the system.



WARNING: Use appropriate primary systems for navigation, and for terrain, obstacle, and traffic avoidance. Garmin SVT is intended as an aid to situational awareness only and may not provide either the accuracy or reliability upon which to solely base decisions and/or plan maneuvers to avoid terrain, obstacles, or traffic.



WARNING: Do not use the Garmin SVT runway depiction as the sole means for determining the proximity of the aircraft to the runway or for maintaining the proper approach path angle during landing.



WARNING: Do not use TAWS information for primary terrain or obstacle avoidance. TAWS is intended only to enhance situational awareness.



CAUTION: Do not clean display surfaces with abrasive cloths or cleaners containing ammonia. They will harm the anti-reflective coating.



CAUTION: Do not allow repairs to be made by anyone other than an authorized Garmin service center. Unauthorized repairs or modifications could void both the warranty and affect the airworthiness of the aircraft.



NOTE: Do not rely solely upon data link services to provide Temporary Flight Restriction (TFR) information. Always confirm TFR information through official sources such as Flight Service Stations or Air Traffic Control.



NOTE: All visual depictions contained within this document, including screen images of the system panel and displays, are subject to change and may not reflect the most current system and aviation databases. Depictions of equipment may differ slightly from the actual equipment.



NOTE: The United States government operates the Global Positioning System and is solely responsible for its accuracy and maintenance. The GPS system is subject to changes which could affect the accuracy and performance of all GPS equipment. Portions of the system utilize GPS as a precision electronic NAVigation AID (NAVAID). Therefore, as with all NAVAIDs, information presented by the system can be misused or misinterpreted and, therefore, become unsafe.



NOTE: This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.



NOTE: Interference from GPS repeaters operating inside nearby hangars can cause an intermittent loss of attitude and heading displays while the aircraft is on the ground. Moving the aircraft more than 100 yards away from the source of the interference should alleviate the condition.



NOTE: Use of polarized eyewear may cause the flight displays to appear dim or blank.



NOTE: This product, its packaging, and its components contain chemicals known to the State of California to cause cancer, birth defects, or reproductive harm. This notice is being provided in accordance with California's Proposition 65. If you have any questions or would like additional information, please refer to our web site at www.garmin.com/prop65.



NOTE: Operating the system in the vicinity of metal buildings, metal structures, or electromagnetic fields can cause sensor differences that may result in nuisance miscompare annunciations during start up, shut down, or while taxiing. If one or more of the sensed values are unavailable, the annunciation indicates no comparison is possible.



NOTE: The system responds to a terminal procedure based on data coded within that procedure in the Navigation Database. Differences in system operation may be observed among similar types of procedures due to differences in the Navigation Database coding specific to each procedure.



NOTE: The FAA has asked Garmin to remind pilots who fly with Garmin database-dependent avionics of the following:

- It is the pilot's responsibility to remain familiar with all FAA regulatory and advisory guidance and information related to the use of databases in the National Airspace System.
- Garmin equipment will only recognize and use databases that are obtained from Garmin or Jeppesen. Databases obtained from Garmin or Jeppesen that have a Type 2 Letter of Authorization (LOA) from the FAA are assured compliance with all data quality requirements (DQRs). A copy of the Type 2 LOA is available for each applicable database and can be viewed at flygarmin.com by selecting 'Aviation Database Declarations.'
- Use of a current Garmin or Jeppesen database in your Garmin equipment is required for compliance with established FAA regulatory guidance, but does not constitute authorization to fly any and all terminal procedures that may be presented by the system. It is the pilot's responsibility to operate in accordance with established pertinent aircraft documents and regulatory guidance or limitations as applicable to the pilot, the aircraft, and installed equipment.



NOTE: The pilot/operator must review and be familiar with Garmin's database exclusion list as discussed in SAIB CE-14-04 to determine what data may be incomplete. The database exclusion list can be viewed at www.flygarmin.com by selecting 'Database Exclusions List.'



NOTE: The pilot/operator must have access to Garmin and Jeppesen database alerts and consider their impact on the intended aircraft operation. The database alerts can be viewed at www.flygarmin.com by selecting 'Aviation Database Alerts.'



NOTE: If the pilot/operator wants or needs to adjust the database, contact Garmin Product Support.



NOTE: Garmin requests the flight crew report any observed discrepancies related to database information. These discrepancies could come in the form of an incorrect procedure; incorrectly identified terrain, obstacles and fixes; or any other displayed item used for navigation or communication in the air or on the ground. Go to FlyGarmin.com and select 'Aviation Data Error Report'.



NOTE: Operate G1000NXi system power through at least one cycle in a period of four days of continuous operation to avoid an autonomous system reboot.



NOTE: Electronic aeronautical charts displayed on this system have been shown to meet the guidance in AC 120 76D as a Type B Electronic Flight Bag (EFB) for FlightCharts and ChartView. The accuracy of the charts is subject to the chart data provider. Own-ship position on airport surface charts cannot be guaranteed to meet the accuracy specified in AC 120-76D. Possible additional requirements may make a secondary source of aeronautical charts, such as traditional paper charts or an additional electronic display, necessary on the aircraft and available to the pilot. If the secondary source of aeronautical charts is a Portable Electronic Device (PED), its use must be consistent with the guidance in AC 120-76D.



NOTE: When using Stormscope, there are several atmospheric phenomena in addition to nearby thunderstorms that can cause isolated discharge points in the strike display mode. However, clusters of two or more discharge points in the strike display mode do indicate thunderstorm activity if these points reappear after the screen has been cleared.



NOTE: Intruder aircraft at or below 500 ft. AGL may not appear on the Garmin SVT display or may appear as a partial symbol.

Blank Page

SOFTWARE LICENSE AGREEMENT

BY USING THE DEVICE, COMPONENT OR SYSTEM MANUFACTURED OR SOLD BY GARMIN ("THE GARMIN PRODUCT"), YOU AGREE TO BE BOUND BY THE TERMS AND CONDITIONS OF THE FOLLOWING SOFTWARE LICENSE AGREEMENT. PLEASE READ THIS AGREEMENT CAREFULLY. Garmin Ltd. and its subsidiaries ("Garmin") grants you a limited license to use the software embedded in the Garmin Product (the "Software") in binary executable form in the normal operation of the Garmin Product. Title, ownership rights, and intellectual property rights in and to the Software remain with Garmin and/or its third-party providers. You acknowledge the Software is the property of Garmin and/or its third-party providers and is protected under the United States of America copyright laws and international copyright treaties. You further acknowledge the structure, organization, and code of the Software are valuable trade secrets of Garmin and/or its third-party providers and the Software in source code form remains a valuable trade secret of Garmin and/or its third-party providers. You agree not to reproduce, decompile, disassemble, modify, reverse assemble, reverse engineer, or reduce to human readable form the Software or any part thereof or create any derivative works based on the Software. You agree not to export or re-export the Software to any country in violation of the export control laws of the United States of America.

Blank Page

Record of Revisions				
Part Number	Revision	Date	Page Range	Description
190-02452-00	A	06/7/18	All	Initial Release for GDU 20.80
	B	10/8/21	All	Added Garmin Electronic Stability & Protection (ESP) Clerical Updates

Blank Page

SECTION 1 SYSTEM OVERVIEW	
1.1 System Description	1
1.2 System Controls	4
PFD/MFD Controls	4
Secure Digital (SD) Cards	6
1.3 System Operation	8
Applying Power to the System	8
Normal Operation	8
Reversionary Mode	9
System Annunciations	10
System Status	11
AHRS Operation	12
GPS Receiver Operation	14
1.4 Accessing System Functionality	19
Softkey Functions	19
Menus	24
MFD Page Groups	24
Split Screen Functionality	27
System Settings	28
System Utilities	37
1.5 Display Backlighting	41
SECTION 2 FLIGHT INSTRUMENTS	
2.1 Flight Instruments	46
Airspeed Indicator	46
Attitude Indicator	48
Altimeter	49
Vertical Speed Indicator (VSI)	51
Vertical Deviation Indicator (VDI)	51
Vertical Navigation (VNV) Indications	52
Horizontal Situation Indicator (HSI)	53
Course Deviation Indicator (CDI)	58
2.2 Supplemental Flight Data	65
Generic Timer	65
Temperature Displays	65
Wind Data	66
2.3 Garmin Synthetic Vision Technology (SVT)	67
SVT Operation	68
SVT Features	69
Field of View	77
2.4 PFD Annunciations and Alerting Functions	79
Marker Beacon Annunciations	79
Altitude Alerting	79
Baro Transition Alerts	79
Low Altitude Annunciation	80
Minimum Altitude Alerting	81
2.5 Abnormal Operations	83
Abnormal GPS Conditions	83
Garmin SVT Troubleshooting	84
Garmin SVT In Reversionary Mode	84
Unusual Attitudes	84
Garmin SVT Unusual Attitudes	85
SECTION 3 ENGINE INDICATION SYSTEM (EIS)	
3.1 Engine Display	88
3.2 Engine Page	90
Fuel Calculations	93
3.3 Reversionary Mode	94
SECTION 4 AUDIO AND CNS	
4.1 Overview	95
PFD Controls and Frequency Display	96
Audio Panel Controls	98
4.2 COM Operation	101
COM TUNING BOXES	101
COM Transceiver Manual Tuning	102
Auto-Tuning the COM Frequency	102
Auto-Tuning from the PFD	103
Auto-tuning from the MFD	103
Frequency Spacing	106
4.3 NAV Operation	107
NAV Tuning Boxes	107
NAV Radio Selection and Activation	108
NAV Receiver Manual Tuning	108
Auto-Tuning from the MFD	108
Auto-Tuning NAV Frequencies on Approach Activation	111
Marker Beacon Receiver	111
ADF/DME	112
ADF Tuning	114
Selecting ADF Receiver Mode	115
DME Tuning	116
4.4 Mode S Transponder	117
Transponder Controls	117
Transponder Mode Selection	118
Entering a Transponder Code	120
IDENT Function	121
4.5 Additional Audio Panel Functions	122
Power Application	122
Mono/Stereo Headsets	122
3D Audio	122
Speaker and Passenger Address (PA) System	123
Intercom	123
Split COM Mode	125
Clearance Recorder	126

Bluetooth Setup	126
Blue-Select Mode	128
Entertainment Inputs	128
4.6 Audio Panel Preflight Procedure	130
4.7 Abnormal Operation	131
Audio Panel Fail-safe Operation	131
Stuck Microphone	131
COM Tuning Failure	131
Transponder Failure	131
Reversionary Mode	131

SECTION 5 FLIGHT MANAGEMENT

5.1 Introduction	133
Navigation Status Box and Navigation Data Bar	135
5.2 Using Map Displays	136
Map Orientation	136
Map Range	138
Map Panning	140
Measuring Bearing and Distance	142
Topography	142
Map Symbols	145
Additional Navigation Map Items	151
5.3 Waypoints	154
Airports	155
Non-Airport Waypoints	160
5.4 Airspaces	169
Nearest Airspace	170
Smart Airspace	172
5.5 Direct-to Navigation	173
5.6 Flight Planning	178
Flight Plan Information	178
Flight Plan Views	181
Creating a Flight Plan	184
Flight Plan Waypoint and Airway Modifications	185
Flight Plan Operations	193
Closest Point of FPL	196
User-Defined Holding Patterns	197
Managing Flight Plans	201
5.7 Vertical Navigation	210
Altitude Constraints	212
Vertical Situation Display (VSD)	214
5.8 Procedures	218
Departures	220
Arrivals	223
Approaches	226

5.9 Trip Planning	234
Trip Planning	234
5.10 Abnormal Operation	238
Dead Reckoning	238

SECTION 6 HAZARD AVOIDANCE

6.1 Data Link Weather	242
Activating Data Link Weather Services	243
Weather Product Age	246
Displaying Data Link Weather Products	250
Weather Data Link (CNXT) Page Softkeys	253
Weather Data Link (FIS-B) Page Softkeys	254
Connex Data Requests	259
Weather Product Overview	262
Precipitation (Garmin Connex)	271
FIS-B Weather Status	296
Abnormal Operations for Garmin Connex Weather	297
6.2 Stormscope Lightning Detection System	299
Using the Stormscope Page	299
Setting Up Stormscope on the Navigation Map	301
6.3 Terrain Displays	304
Relative Terrain Symbology	305
Terrain-SVT Alerting Displays	310
Forward Looking Terrain Avoidance	312
System Status	313
6.4 Traffic Information Service (TIS)	314
Displaying Traffic Data	315
Traffic Map Page	316
TIS Alerts	317
System Status	319
6.5 Avidyne TAS600 Traffic	321
TAS Theory of Operation	321
TAS Alerts	323
System Test	324
Operation	325
6.6 ADS-B Traffic	331
ADS-B System Overview	331
Conflict Situational Awareness & Alerting (CSA)	333
Airborne and Surface Applications	335
Traffic Description	336
Operation	337
ADS-B System Status	342

SECTION 7 AUTOMATIC FLIGHT CONTROL SYSTEM

7.1 AFCS Overview.....	347
7.2 AFCS Controls	348
AFCS Controller.....	348
Additional AFCS Controls.....	349
7.3 Flight Director Operation.....	350
Activating the Flight Director	350
AFCS Status Box.....	351
Flight Director Modes.....	351
Command Bars	352
7.4 AFCS Modes	353
Vertical Modes	353
Lateral Modes	358
Combination Modes.....	362
7.5 Autopilot Operation.....	373
Flight Control	373
Engagement.....	373
Control Wheel Steering	374
Disengagement	374
7.6 AFCS Annunciations and Alerts.....	375
Overspeed Protection.....	376
7.7 Abnormal Operation	377
Suspected Autopilot Malfunction	377
Overpowering Autopilot Servos	377

SECTION 8 ADDITIONAL FEATURES

8.1 Overview.....	379
8.2 SafeTaxi.....	380
8.3 Electronic Charts (Optional).....	383
ChartView	384
FliteCharts.....	392
IFR/VFR Charts	399
8.4 Airport Directory.....	402
8.5 SiriusXM Satellite Radio (Optional).....	403
Activating SiriusXM Satellite Radio Services	403
Using SiriusXM Radio.....	404
8.6 Flight Data Logging	408
8.7 Satellite Telephone and SMS Text Messaging ..	410
Registering with Garmin Connex	410
Disabling/Enabling Iridium Transceiver.....	411
Telephone Communication.....	412
Text Messaging (SMS)	419

8.8 Connex (Optional).....	430
8.9 Electronic Stability and Protection	
(ESP) (Optional).....	432
Roll Engagement.....	433
Pitch Engagement	434
High Airspeed Protection	435
8.10 Electronic Checklists	436
8.11 Database Management.....	438
Cycle Number and Revision	438
8.12 Abnormal Operation	441
SiriusXM Datalink Receiver Troubleshooting	441

APPENDICES

Annunciations and Alerts	443
Crew Alerting System (CAS)	443
Audio Alerting System Test.....	445
System Messages Annunciations	446
Database Management	457
Loading Updated Databases	457
Updating Databases with SD card or Wireless Transceiver	
Card	458
Updating Databases with	
Garmin Pilot / Wireless Transceiver	461
Deleting Databases	467
Magnetic Field Variation Database Update	468
Aviation Terms, Abbreviations, and Acronyms.....	469
Frequently Asked Questions.....	483
Miscellaneous Map Symbols	487

INDEX

Index	I-1
--------------------	------------

Blank Page

SECTION 1 SYSTEM OVERVIEW

1.1 SYSTEM DESCRIPTION

This section provides an overview of the G1000 NXi Integrated Avionics System as installed in the Diamond DA40NG. The system is an integrated flight control system that presents flight instrumentation, position, navigation, communication, and identification information to the flight crew using flat-panel color displays. The system consists of the following Line Replaceable Units (LRUs):

- **GDU 1050** (1) – The Display Unit is configured as a Primary Flight Display (PFD) that features a 10 inch high resolution LED backlit display. The display communicates with the Multifunction Display (MFD) and with the #1 Integrated Avionics Unit.
- **GDU 1054** (1) – The Display Unit is configured as a Multifunction Display (MFD) that features a 10 inch high resolution LED backlit display. The display communicates with the PFD and with the #2 Integrated Avionics Unit.
- **GIA 64W** (2) – The Integrated Avionics Unit (IAU) functions as the main communication hub, linking all LRUs with the PFD and MFD. Each IAU contains a GPS SBAS receiver, VHF COM/NAV/GS receivers, a flight director (FD) and system integration microprocessors. #1 IAU is paired with the PFD, and #2 IAU is paired with the MFD. The IAUs are not paired together and do not communicate with each other directly.
- **GRS 79** (1) – The Attitude and Heading Reference System (AHRS) provides aircraft attitude and heading information to the PFD, MFD and both IAUs. The AHRS contains advanced sensors (including accelerometers and rate sensors) and interfaces with the Magnetometer to obtain magnetic field information, with the ADC to obtain air data, and with both IAUs to obtain GPS information. AHRS operation is discussed later in this section.
- **GMU 44** (1) – The Magnetometer measures local magnetic field. Data is sent to the AHRS for processing to determine aircraft magnetic heading. The Magnetometer communicates with and receives power directly from the AHRS.
- **GDC 72** (1) – The Air Data Computer (ADC) processes data from the pitot/static system as well as the Outside Air Temperature (OAT) probe. This unit provides pressure altitude, airspeed, vertical speed and OAT information to the system. It communicates with both IAUs, the PFD, MFD, and AHRS (it also interfaces directly with the OAT probe).
- **GEA 71B** (1) – The Engine Airframe Unit receives and processes signals from the engine and airframe sensors. This unit communicates with both IAUs.
- **GMA 1360** (1) – The Audio Panel integrates NAV/COM digital audio, intercom system, and marker beacon controls, while the GMA 1360 additionally offers Bluetooth® capability. This unit enables manual control of the display Reversionary Mode (via the red **DISPLAY BACKUP** Button). It communicates with both IAUs.
- **GTX 335R** (1) or **GTX 345R** (1 alternate) – The solid state Transponder provides Mode A, C, S capabilities and ADS-B Out functionality. The GTX 345R additionally provides ADS-B In functionality. The Transponder can be controlled from the PFD. The Transponder communicates with both IAUs.
- **GSA 81** (3) The Servos are used for the automatic control of roll, pitch, and pitch trim. These units interface with each IAU.
- **GSM 86** (3) – The Servo Gearboxes are responsible for transferring the output torque of the servo actuators to the mechanical flight-control surface linkages.

- **GDL 69A SXM** (1 optional) – The SiriusXM Datalink Radio Receiver receives weather information, as well as digital audio entertainment. Subscriptions to the SiriusXM Weather or SiriusXM Satellite Radio are required to enable services. The unit communicates with the MFD.
- **GSR 56** (1 optional) – The Iridium Transceiver provides voice communication by means of pilot and copilot headsets. The transceiver can also send and receive short message service (SMS) text messages and receive data link weather products from the Garmin Connex weather service through the Iridium satellite network. It is connected to #2 IAU.
- **Flight Stream 510** (1 optional) – The Flight Stream Wireless Transceiver provides wireless Bluetooth® connectivity between a compatible tablet/mobile device and the avionics system. GPS, AHRS, ADS-B, traffic, SiriusXM audio, and weather data can then be shared with the mobile device, and flight plans can be transferred to or from the mobile device. Also, database updates may be performed using the Flight Stream 510 Wi-Fi link. The system is capable of interfacing with the following non-Garmin components:

- **EECU-E4-01** (1) FADEC
- **KN 63** (1 optional) DME
- **RA 3502** (1 optional) ADF
- **TAS 600** (1 optional) Traffic Advisory System
- **WX-500** (1 optional) Stormscope Lightning Sensor

A top-level system block diagram is shown in Figure 1-1.



NOTE: For information on non-Garmin equipment, consult the applicable user's guide. This document assumes the reader is already familiar with the operation of this additional equipment.



NOTE: Refer to the Automatic Flight Control System (AFCS) Section for details on the Garmin AFCS.

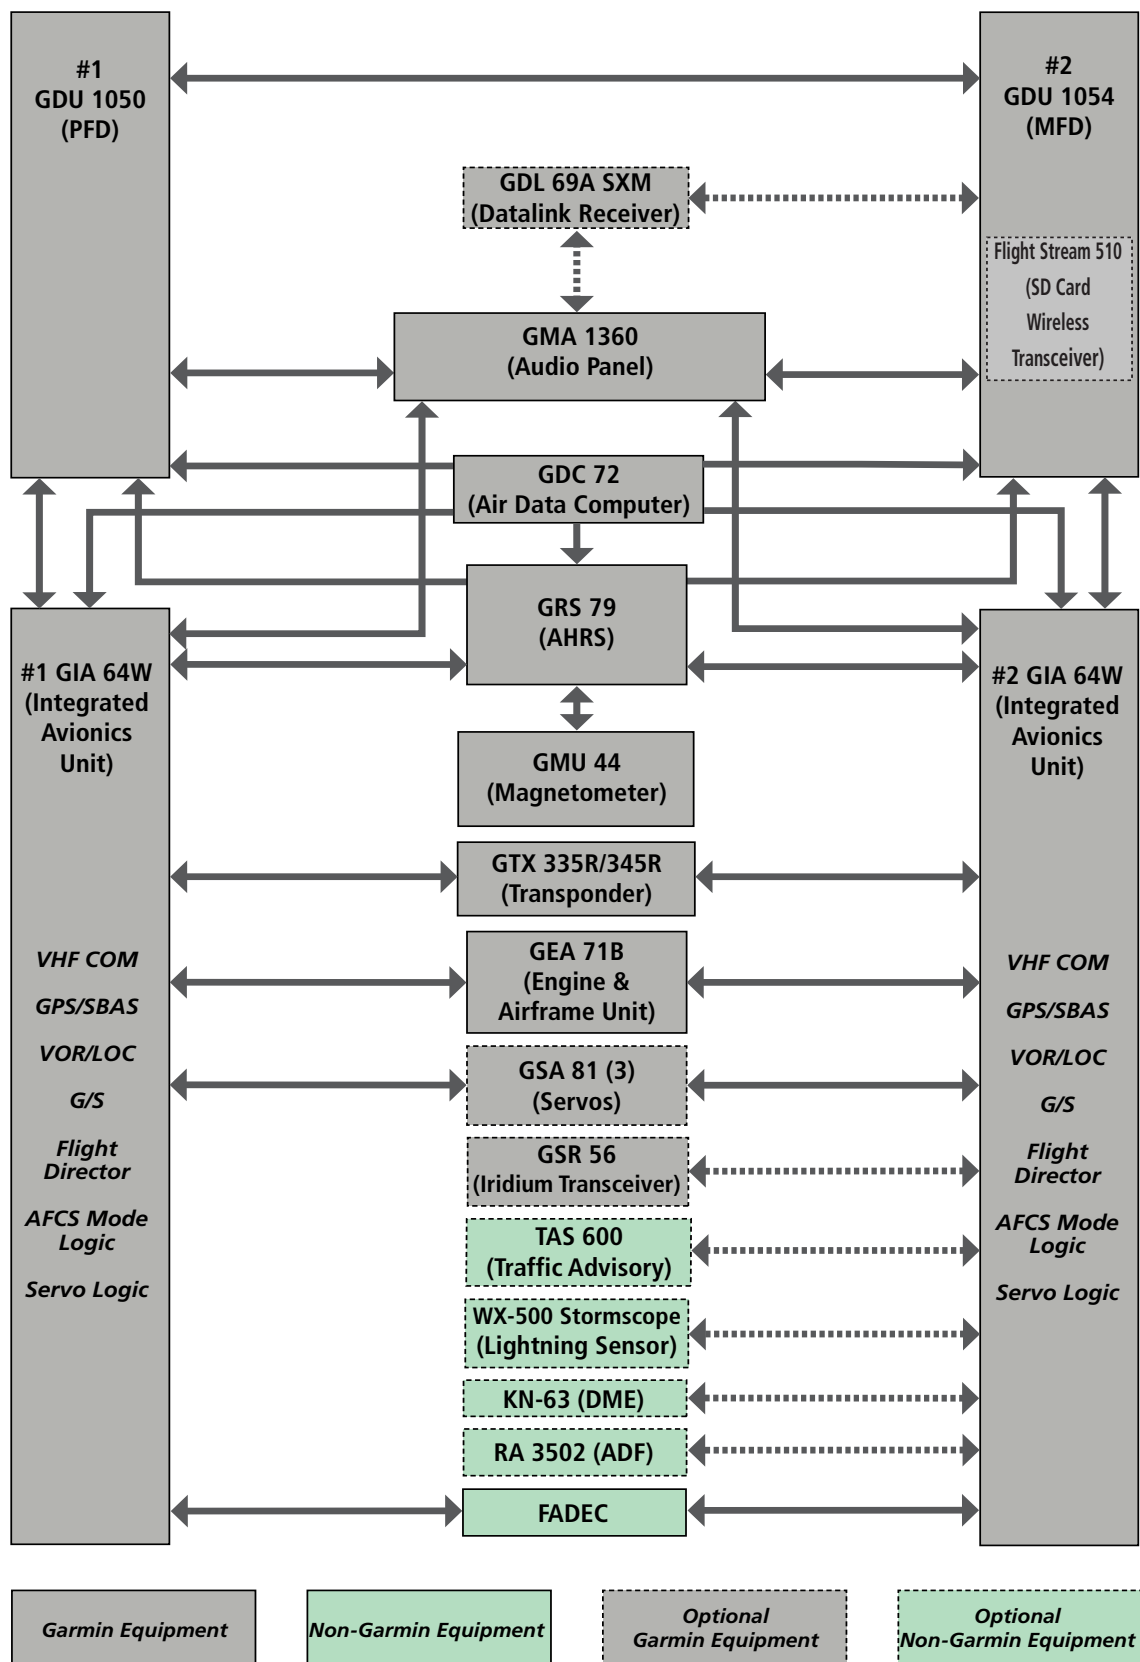


Figure 1-1 System (LRU Configuration)

1.2 SYSTEM CONTROLS

The system controls have been designed to simplify operation of the system and minimize workload and the time required to access sophisticated functionality. These controls are located on the PFD and MFD bezels and the Audio Panel. The controls for the PFD and MFD are discussed within this section.



NOTE: The Audio Panel is described in the Audio & CNS Section.

PFD/MFD CONTROLS

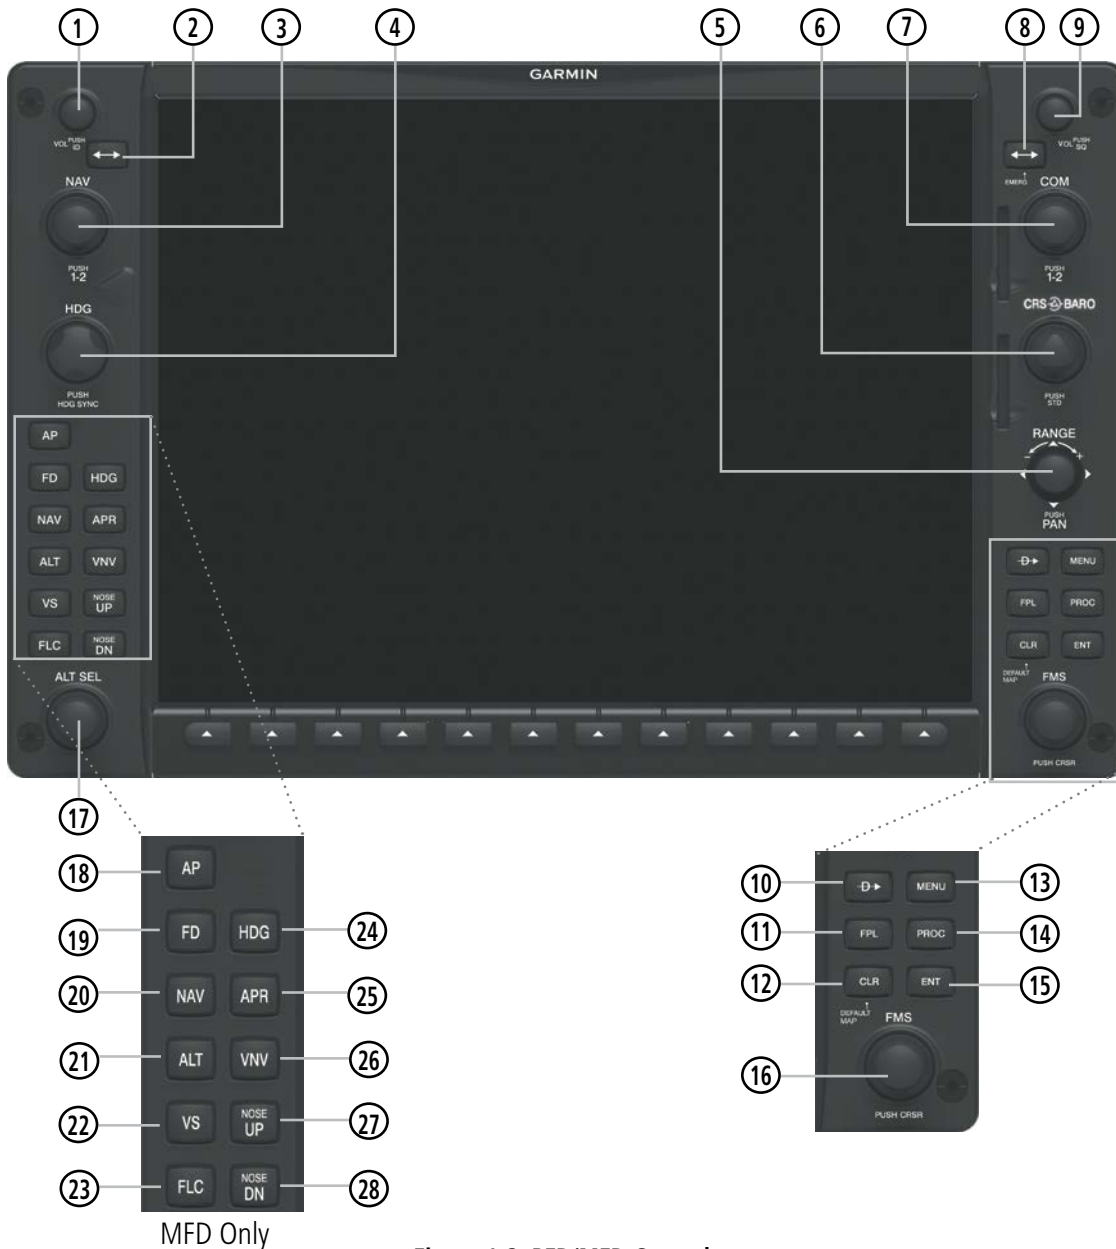


Figure 1-2 PFD/MFD Controls

- ① **NAV VOL/ID Knob** Turn to control NAV audio volume (shown in the NAV frequency box as a percentage). Push to toggle Morse code identifier audio ON/OFF.
- ② **NAV Frequency Transfer Key** Transfers the standby and active NAV frequencies.
- ③ **NAV Knob** Turn to tune NAV receiver standby frequencies (large knob for MHz; small for kHz). Push to toggle cyan tuning box between NAV1 and NAV2.
- ④ **Heading Knob** Turn to manually select a heading. When operating in heading select mode, this knob provides the heading reference to the flight director. Push to display a digital heading momentarily to the left of the HSI and synchronize the Selected Heading to the current heading.
- ⑤ **Range Knob/Joystick** Turn to change map range. Push to activate map pointer for map panning.
- ⑥ **CRS/BARO Knob** Turn large knob for altimeter barometric pressure setting. Turn small knob to set the pilot-selected course on the HSI when the VOR1, VOR2, or OBS/SUSP Mode is selected. Pushing this knob centers the CDI on the currently selected VOR. The pilot-selected course provides course reference to the pilot-side flight director when operating in navigation and approach modes. Push to re-center the CDI and return course pointer directly TO bearing of active waypoint/station.
- ⑦ **COM Knob** Turn to tune COM transceiver standby frequencies (large knob for MHz; small for kHz). Push to toggle cyan tuning box between COM1 and COM2. The selected COM (green) is controlled with the **COM MIC** Key on the Audio Panel.
- ⑧ **COM Frequency Transfer Key (EMERG)** Transfers the standby and active COM frequencies. Press and hold two seconds to tune the emergency frequency (121.5 MHz) automatically into the active frequency field.
- ⑨ **COM VOL/SQ Knob** Turn to control COM audio volume level (shown as a percentage in the COM frequency box). Push to turn the COM automatic squelch ON/OFF.
- ⑩ **Direct-to Key (D➤)** Activates the direct-to function and allows the user to enter a destination waypoint and establish a direct course to the selected destination (the destination is either specified by the identifier, chosen from the active route, or taken from the map pointer position).
- ⑪ **FPL Key** Accesses flight plan information and allows for creating and editing the active flight plan.
- ⑫ **CLR Key (DFLT MAP)** Erases information, cancels entries, or removes menus. Press and hold to display the 'Map – Navigation Map' Page (MFD only).
- ⑬ **MENU Key** Displays a context-sensitive list of options for accessing additional features or making setting changes.
- ⑭ **PROC Key** Gives access to IFR departure procedures (DPs), arrival procedures (STARs), and approach procedures (IAPs) for a flight plan or selected airport.
- ⑮ **ENT Key** Validates/confirms menu selection or data entry.

- ①⑥ **FMS Knob**
(Flight Management System Knob)
- **Data Entry:** With cursor ON, turn to enter data in the highlighted field (large knob moves cursor location; small knob selects character for highlighted cursor location).
 - **Scrolling:** When a list of information is too long for the window/box, a scroll bar appears, indicating more items to view. With cursor ON, turn large knob to scroll through the list.
 - **Page Selection:** Turn knob on MFD to select the page to view (large knob selects a page group; small knob selects a specific page from the group).
- ①⑦ **ALT or ALT SEL Knob**
- Sets the Selected Altitude in the selected altitude box (the large knob selects the thousands, the small knob selects the hundreds). In addition to providing the standard system altitude alert function, Selected Altitude provides an altitude setting for the altitude capture/hold mode of the AFCS.
- ①⑧ **AP Key¹**
- Engages/disengages the autopilot and flight director in the default vertical and lateral modes.
- ①⑨ **FD Key¹**
- Activates/deactivates the flight director only. Pressing the **FD** Key turns on the flight director in the default vertical and lateral modes. Pressing the **FD** Key again deactivates the flight director and removes the command bars, unless the autopilot is engaged. If the autopilot is engaged, the **FD** Key is disabled.
- ②⑦ **NAV Key¹**
- Selects/deselects the navigation mode.
- ②⑧ **ALT Key¹**
- Selects/deselects the altitude hold mode.
- ②⑨ **VS Key¹**
- Selects/deselects the vertical speed mode.
- ③① **FLC Key¹**
- Selects/deselects the flight level change mode.
- ③② **HDG Key¹**
- Selects/deselects the heading select mode.
- ③③ **APR Key¹**
- Selects/deselects the approach mode.
- ③④ **VNV Key¹**
- Selects/deselects vertical navigation mode.
- ③⑤ **NOSE UP Key¹**
- Controls the active pitch reference for the pitch hold, vertical speed, and flight level change modes.
- ③⑥ **NOSE DN Key¹**
- Controls the active pitch reference for the pitch hold, vertical speed, and flight level change modes.

¹ Key appears only on the MFD

SECURE DIGITAL (SD) CARDS



NOTE: DO NOT use the database SD cards for any purpose other than database storage.



NOTE: Refer to the Appendices for instructions on updating the aviation databases.



NOTE: Ensure the system is powered off before inserting the SD card.

The data card slots on the PFD and MFD use Secure Digital (SD) cards and are located on the top right portion of the display bezels. Each display bezel is equipped with two SD card slots. SD cards are used for various databases, system software updates, recording flight data, and storing electronic documents. Also, flight plans may be imported or exported from an SD card in the MFD. Not all SD cards are compatible with the system. Use only SD cards supplied by Garmin or the aircraft manufacturer.

Inserting an SD card

Insert the SD card in the SD card slot, pushing the card in until the spring latch engages. The front of the card should remain flush with the face of the display bezel.

Removing an SD card

Gently press on the SD card to release the spring latch and eject the card.



Figure 1-3 PFD/MFD Display Bezel SD Card Slots

1.3 SYSTEM OPERATION

This section discusses applying power to the system, normal and reversionary display operation, system status, AHRS modes of operation, and GPS receiver operation.

APPLYING POWER TO THE SYSTEM



NOTE: See the Appendices for additional information regarding system-specific annunciations and alerts.



NOTE: See the current version of the pertinent flight manual for specific procedures concerning avionics power application and emergency power supply operation.

The system is integrated with the aircraft electrical system and receives power directly from electrical busses. The PFD, MFD, and supporting sub-systems include both power-on and continuous built-in test features that exercise the processors, memory, external inputs, and outputs to provide safe operation.

The system momentarily displays test annunciations and illuminates annunciator lights on the Audio Panel and display bezels when power is applied. All annunciations and annunciator lights should be extinguished typically within the first minute of applying power.

On the PFD, the AHRS begins to initialize and displays 'AHRS ALIGN: Keep Wings Level'. The AHRS should display valid attitude and heading fields typically within the first minute of applying power. The AHRS can align itself both while taxiing in a straight line and during level flight.

When the MFD is powered on, the initial screen displays the following information:

- Copyright
- System Version
- Checklist Files Information
- Land Database Name and Version
- Safe Taxi Database Name and Expiration Date
- Terrain Database Name and Version
- Obstacle Database Name and Expiration Date
- Navigation Database Name and Expiration Date
- Airport Directory Name and Expiration Date
- ChartView Database Information
- FliteCharts Database Information
- IFR/VFR Chart Database Information
- Crew Profile

Current database information includes database type, cycle number, or valid operating dates. Review the listed information for currency (to ensure no databases have expired). Then, press the **ENT** Key or the right-most softkey on the MFD to acknowledge the information and continue.

NORMAL OPERATION



NOTE: In normal operating mode, the system automatically adjusts display and key backlighting via built in sensors. Further manual adjustment, if desired, can be made from the PFD or individual dimmer bus control for the desired display. In Reversionary Mode, backlighting can be adjusted from the remaining display.

In normal operations, the PFD presents graphical flight instrumentation (such as heading, airspeed, altitude, vertical speed), replacing the traditional flight instrument cluster. The MFD normally displays a full-color moving map with navigation information, while the left portion of the MFD is dedicated to the Engine Indication System (EIS). Both displays offer control for COM and NAV frequency selection.



Figure 1-4 System Normal Operation

REVERSIONARY MODE



NOTE: The system alerts the pilot when backup paths are utilized by the LRUs. Refer to the Appendices for further information regarding system-specific alerts.

In the event of a display failure, the system automatically switches to Reversionary (backup) Mode. Reversionary Mode may also be manually activated. In Reversionary Mode, all important flight information is presented on the remaining display in the same format as in normal operating mode.

If a display fails, the appropriate IAU interface is cut off. Thus, the IAU can no longer communicate with the remaining display, and the NAV and COM functions provided to the failed display by the IAU are flagged as invalid on the remaining display. The system reverts to backup paths for the AHRS, ADC, Engine/Airframe Unit, and Transponder, as required. The change to backup paths is completely automated for all LRUs and no pilot action is required.

Reversionary Mode may be manually activated by pressing the Audio Panel's red **DISPLAY BACKUP** Button. Pressing this button again deactivates Reversionary Mode.



DISPLAY BACKUP Button
Manually Activates/Deactivates Reversionary Mode on Both Displays
Figure 1-5 Reversionary Mode (Failed PFD)

SYSTEM ANNUNCIATIONS

When an LRU or an LRU function fails, a large ‘X’ is typically displayed on the window(s) associated with the failed data. Depending on the LRU, the ‘X’ may be amber or red. Upon applying power to the system, certain instruments remain invalid as equipment begins to initialize. All windows should be operational within one minute of applying power. If any window remains flagged, the system should be serviced by a Garmin-authorized repair facility.



NOTE: For a detailed description of all annunciations and alerts, refer to the Appendices. Refer to the current version of the pertinent flight manual for additional information regarding pilot responses to these annunciations.

System Annunciation	Comment
	AHRS is aligning.
	Display system is not receiving attitude information from the AHRS.
	AHRS calibration incomplete or configuration module failure.
	GPS information is either not present or is invalid for navigational use. Note that AHRS utilizes GPS inputs during normal operation. AHRS operation may be degraded if GPS signals are not present (see pertinent flight manual).
	Display system is not receiving airspeed input from the ADC.

System Annunciation	Comment
	Display system is not receiving vertical speed input from the ADC.
	Display system is not receiving valid heading input from the AHRS or Magnetometer.
	Display system is not receiving altitude input from the ADC.
	Display system is not receiving valid temperature information.
	Display system is not receiving valid transponder information.
Other Various Red or Amber 'X' Indications	A red or amber 'X' through any other display field (such as engine instrumentation fields), indicates the field is not receiving valid data.

Table 1-1 System Failure Annunciations

SYSTEM STATUS

The status and software version numbers of detected LRUs can be checked on the 'Aux – System Status' Page. Pertinent information on all system databases is also displayed. Active LRUs are indicated by green check marks; failed by red 'X's. Failed LRUs should be noted and a service center or Garmin-authorized dealer informed.

Viewing LRU Information:

- 1) Use the **FMS** Knob to select the 'Aux – System Status' Page.
- 2) To place the cursor in the 'LRU Information' Box, press the **LRU** Softkey.
Or:
 - a) Press the **MENU** Key.
 - b) With 'Select LRU Window' highlighted, press the **ENT** Key.
- 3) Use the **FMS** Knob to scroll through the box to view LRU status information.

7.80 TOP GS 179KT DTK ---° TRK 287° ETE ---

5.50 STJ Aux – System Status 133.300 ↔ 121.900 15
128.200 118.200 2M

LRU Information

	Status	Serial Number	Version
COM1	✓	-----	-----
COM2	✓	-----	-----
GDC1	✗	-----	-----
GDL69	✓	0000001	0.00
GEA1	✓	46701637	2.07
GEA2	✓	46701637	2.07
GIA1	✓	1HQ007944	8.051mc
GIA2	✓	1HQ000430	8.051mc
GMA1	✗	-----	-----
GMU1	✗	-----	-----
GPS1	✓	0000001	3.0
GPS2	✓	0000002	3.0
GRS1	✓	1EJ005019	2.30
GS1	✓	17107230	4.04
GS2	✓	17106439	4.04
GSA PTCH CTL	✗	-----	-----

Airframe

Airframe Diamond DA40NG

SYS Software Version 1929.11

Configuration ID 3FBBE504

CRG Part Number 190-02453-00

System ID 000000001

Checklist Not Available

MFD1 Database

Navigation – INTERNAL

Region WW-ADB2

Cycle 2105

Effective 20-MAY-21

Expires 17-JUN-21

Copyright 2021 Jeppesen

BASEMAP – INTERNAL

Region WORLDWIDE

Version 5.16

GARMIN LTD. AND ITS SUBSIDI...

SAFETAXI – INTERNAL

Region US

Version 3.03

LRU ARFRM MFD1 DB

ANN Test

Check

Figure 1-6 Example 'Aux – System Status' Page

The **LRU** and **ARFRM** softkeys on the 'Aux – System Status' Page select the applicable box ('LRU Information' or 'Airframe') through which the **FMS** Knob can be used to scroll information.

Pressing the **MFD1 DB** Softkey (label annunciator turns green, indicating the softkey is selected) places the cursor in the 'MFD1 Database' Box. Use the **FMS** Knob to scroll through database information for the MFD. Pressing the softkey again will change the softkey label to **PFD1 DB**. PFD1 database information is now displayed in the 'PFD1 Database' Box. Pressing the softkey a third time will change the softkey label back to **MFD1 DB**.

The **ANN Test** Softkey, when pressed, causes an annunciation test tone to be played.

AHRS OPERATION



WARNING: Do not rely on the accuracy of attitude and heading indications in the following geographic areas (due to variations in the earth's magnetic field): North of 72° North latitude at all longitudes; South of 70° South latitude at all longitudes; North of 65° North latitude between longitude 75° W and 120° W (Northern Canada); North of 70° North latitude between longitude 70° W and 128° W (Northern Canada); North of 70° North latitude between longitude 85° E and 114° E (Northern Russia); South of 55° South latitude between longitude 120° E and 165° E (Region South of Australia and New Zealand).



NOTE: Refer to the Appendices for specific AHRS alert information.



NOTE: Aggressive maneuvering while AHRS is not operating normally may degrade AHRS accuracy.

In addition to using internal sensors, the AHRS uses GPS information, magnetic field data, and air data to assist in attitude/heading calculations. In normal mode, the AHRS relies upon GPS and magnetic field measurements. If either of these external measurements is unavailable or invalid, the AHRS uses air data information for attitude determination. Four AHRS modes of operation are available and depend upon the combination of available sensor inputs. Loss of air data, GPS, or magnetometer sensor inputs is communicated to the pilot via system messages.

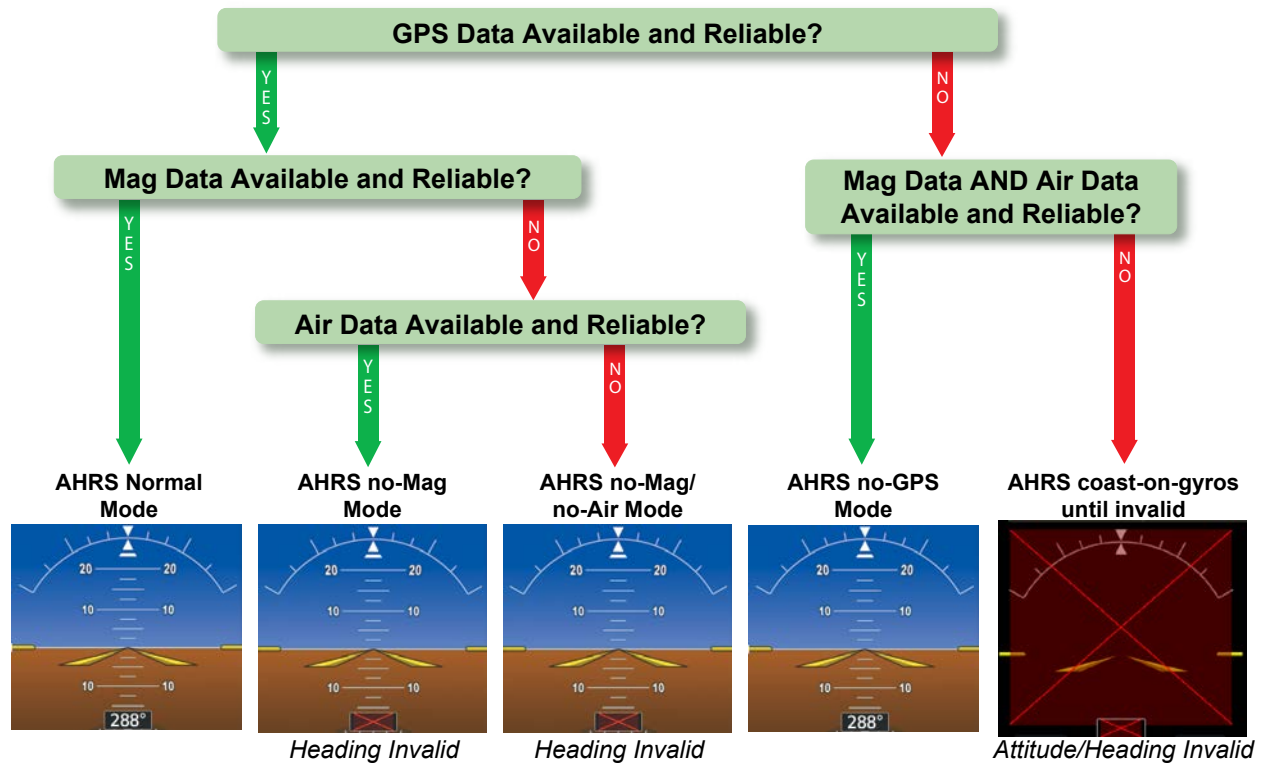


Figure 1-7 AHRS Operation

MAGNETIC FIELD VARIATION DATABASE

The AHRS corrects for shifts and variations in the Earth's magnetic field by applying the Magnetic Field Variation Database. The Magnetic Field Variation Database is derived from the International Geomagnetic Reference Field (IGRF). The IGRF is a mathematical model that describes the Earth's main magnetic field and its annual rate of change. The database is updated approximately every 5 years. See the Appendices for information on updating the Magnetic Field Variation Database. The system will prompt you on startup when an update is available. Failure to update this database could lead to erroneous heading information being displayed to the pilot.

GPS INPUT FAILURE



NOTE: In-flight initialization of AHRS, when operating without any valid source of GPS data and at true airspeed values greater than approximately 200 knots, is not guaranteed. Under these rare conditions, it is possible for in-flight AHRS initialization to take an indefinite amount of time which would result in an extended period of time where valid AHRS outputs are unavailable.

The system provides two sources of GPS information. If a single GPS receiver fails, or if the information provided from one of the GPS receivers is unreliable, the AHRS seamlessly transitions to using the other GPS receiver. An alert message informs the pilot of the use of the backup GPS path. If both GPS inputs fail, the AHRS continues to operate in reversionary no-GPS mode, so long as the air data and magnetometer inputs are available and valid.

AIR DATA INPUT FAILURE

A failure of the air data input has no effect on AHRS output while AHRS is operating in normal mode. A failure of the air data input while the AHRS is operating in reversionary no-GPS mode results in invalid attitude and heading information on the PFD (as indicated by red 'X's).

MAGNETOMETER FAILURE

If the magnetometer input fails, the AHRS transitions to one of the reversionary no-Magnetometer modes and continues to output valid attitude information. However, if the aircraft is airborne, the heading output on the PFD does become invalid (as indicated by a red 'X').

GPS RECEIVER OPERATION

Each Integrated Avionics Unit (IAU) contains a GPS receiver. Information collected by the specified receiver (GPS1 for the #1 IAU or GPS2 for the #2 IAU) may be viewed on the 'Aux – GPS Status' Page.

Internal system checking is performed to ensure both GPS receivers are providing accurate data to the system. In some circumstances, both GPS receivers may be providing accurate data, but one receiver may be providing a better GPS solution than the other. In this case, the GPS receiver producing the better solution is automatically coupled to the PFD.

GPS sensor annunciations are most often seen after system power-on when one GPS receiver has acquired satellites before the other, or one of the GPS receivers has not yet acquired an SBAS signal. While the aircraft is on the ground, the SBAS signal may be blocked by obstructions causing one GPS receiver to have difficulty acquiring a good signal. Also, while airborne, turning the aircraft may result in one of the GPS receivers temporarily losing the SBAS signal.

If the sensor annunciation persists, check for a system failure message in the 'Alerts' Window on the PFD. If no failure message exists, check the 'Aux – GPS Status' Page and compare the information for GPS1 and GPS2. Discrepancies may indicate a problem.

Selecting the GPS receiver for which data may be reviewed:

- 1) Use the **FMS** Knob to select the 'Aux – GPS Status' Page.
- 2) To change the selected GPS receiver, press the desired **GPS1** or **GPS2** Softkey.

Or:

- a) Press the **MENU** Key.
- b) Use the **FMS** Knob to highlight the receiver which is not selected ('GPS1' or 'GPS2') and press the **ENT** Key.

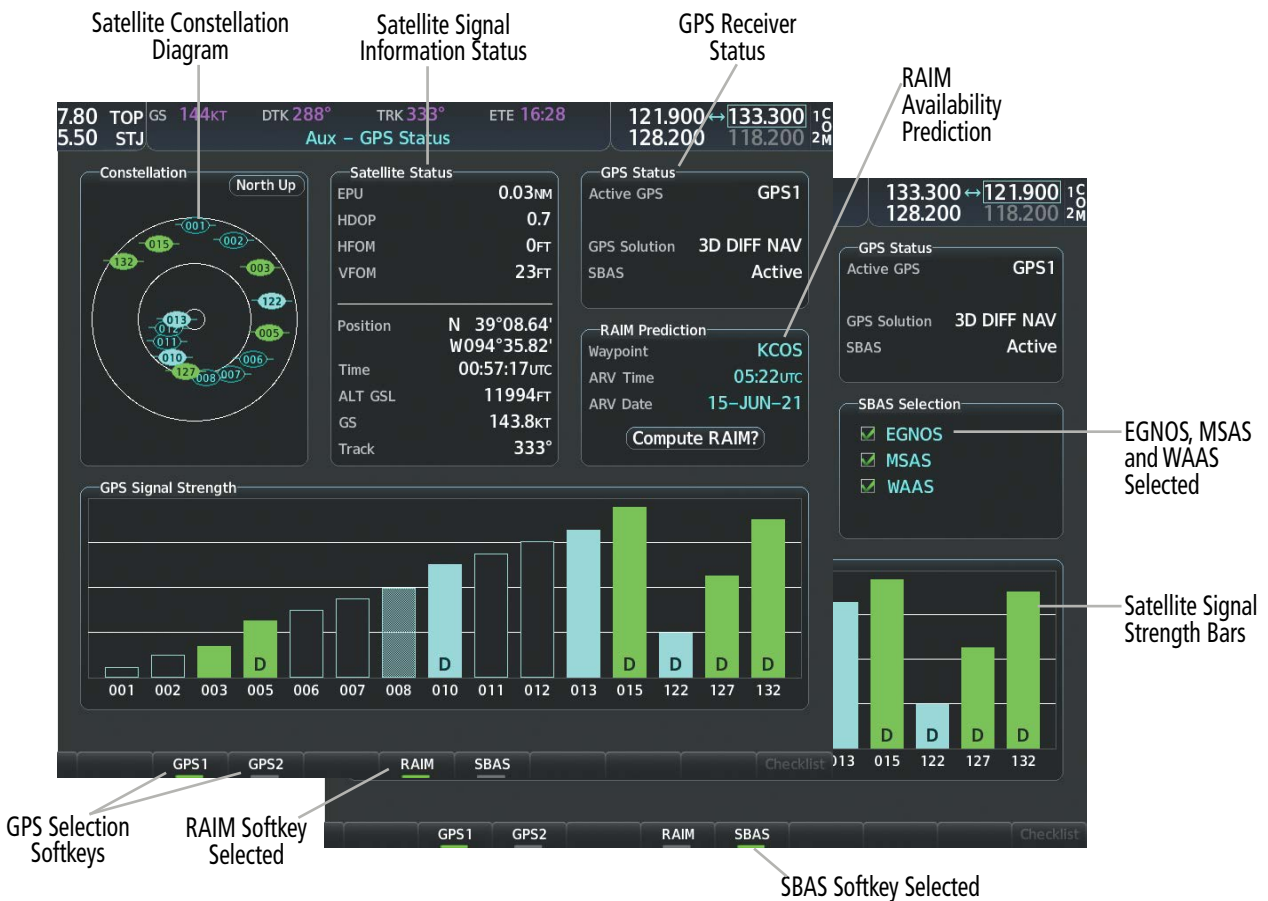


Figure 1-8 GPS Status Page (RAIM or SBAS Selected)

SATELLITE CONSTELLATION DIAGRAM

The 'Aux - GPS Status' Page displays satellites currently in view at their respective positions on a sky view diagram. The sky view is always in a north-up orientation, with the outer circle representing the horizon, the inner circle representing 45° above the horizon, and the center point showing the position directly overhead.

Each satellite is represented by an oval containing the Pseudo-random noise (PRN) number (i.e., satellite identification number). Satellites whose signals are currently being used are represented by solid ovals.

SATELLITE SIGNAL STATUS

This 'Satellite Status' Box provides information regarding signal status. The accuracy of the aircraft's GPS fix is calculated using Estimated Position Uncertainty (EPU), Dilution of Precision (DOP), and horizontal and vertical figures of merit (HFOM and VFOM). EPU is the radius of a circle centered on an estimated horizontal position in which the actual position has a 95% probability of laying. EPU is a statistical error indication and not an actual error measurement.

DOP measures satellite geometry quality (i.e., number of satellites received and where they are relative to each other) on a range from 0.0 to 9.9, with lower numbers denoting better accuracy. HFOM and VFOM, measures of horizontal and vertical position uncertainty, are the current 95% confidence horizontal and vertical accuracy values reported by the GPS receiver.

The current calculated GPS position, time, altitude, groundspeed, and track for the aircraft are displayed below the satellite signal accuracy measurements.

GPS RECEIVER STATUS

The GPS solution type (ACQUIRING, 2D NAV, 2D DIFF NAV, 3D NAV, 3D DIFF NAV) for the active GPS receiver (GPS1 or GPS2) is shown on the upper right of the 'Aux – GPS Status' Page. When the receiver is in the process of acquiring enough satellite signals for navigation, the receiver uses satellite orbital data (collected continuously from the satellites) and last known position to determine the satellites that should be in view. 'ACQUIRING' is indicated as the solution until a sufficient number of satellites have been acquired for computing a solution.

When the receiver is in the process of acquiring a 3D differential GPS solution, '3D NAV' is indicated as the solution until the 3D differential fix has finished acquisition. When acquisition is complete, the solution status indicates '3D DIFF NAV'.

The system will determine if messages are being received from the WAAS engine. If so, the SBAS will read 'Active'. If no messages have been received for 4 seconds and SBAS providers are enabled, the SBAS status will read 'Inactive'. If SBAS providers are disabled, SBAS status will read 'Disabled'. Note that a fix is not required, but rather the status is determined by communication with the WAAS engine.

RECEIVER AUTONOMOUS INTEGRITY MONITORING (RAIM) PREDICTION

In most cases, performing a RAIM prediction is not necessary. However, in some cases, the selected approach may be outside the SBAS coverage area and it may be necessary to perform a RAIM prediction for the intended approach.

Receiver Autonomous Integrity Monitoring (RAIM) is a GPS receiver function that performs a consistency check on all tracked satellites. RAIM ensures the available satellite geometry allows the receiver to calculate a position within a specified RAIM protection limit (2.0 nm for oceanic and enroute, 1.0 nm for terminal, and 0.3 nm for non-precision approaches). During oceanic, enroute, and terminal phases of flight, RAIM is available nearly 100% of the time.

The RAIM prediction function also indicates whether RAIM is available at a specified date and time. RAIM computations predict satellite coverage within ± 15 min of the specified arrival date and time.

Because of the tighter protection limit on approaches, there may be times when RAIM is not available. The system automatically monitors RAIM and warns with an alert message when it is not available. If RAIM is not predicted to be available for the final approach course, the approach does not become active, as indicated by the messages 'Approach is not active' and 'RAIM not available from FAF to MAP'. If RAIM is not available when crossing the FAF, the missed approach procedure must be flown.



NOTE: The system's RAIM prediction capability does not meet all RAIM prediction requirements. Reference the RAIM/Fault Detection and Exclusion (FDE) Prediction Tool at flygarmin.com, as required.

Predicting RAIM availability at a selected waypoint:

- 1) Use the **FMS** Knob to select the 'Aux – GPS Status' Page.
- 2) If necessary, press the **RAIM** Softkey.
- 3) Push the **FMS** Knob. The 'Waypoint' Field is highlighted.
- 4) Turn the small **FMS** Knob to display the 'Waypoint Information' Window.

- 5) Use the **FMS** Knob to enter the desired waypoint by identifier, facility, or city name and press the **ENT** Key.
Or:
 - a) Turn the small **FMS** Knob counter-clockwise to display a list of Flight Plan waypoints (the flight plan list is populated only when navigating a flight plan).
 - b) Turn the small **FMS** Knob clockwise to display the Nearest, Recent, or User waypoints, if required.
 - c) Turn the large **FMS** Knob clockwise to select the desired waypoint. Press the **ENT** Key. The system automatically fills in the identifier, facility, and city fields with the information for the selected waypoint.
 - d) Press the **ENT** Key again to accept the waypoint entry.
- 6) Use the **FMS** Knob to enter an arrival time and press the **ENT** Key.
- 7) Use the **FMS** Knob to enter an arrival date and press the **ENT** Key.
- 8) With the cursor highlighting 'Compute RAIM?', press the **ENT** Key. Once RAIM availability is computed, one of the following is displayed:
 - 'Compute RAIM?' — RAIM has not been computed for the current waypoint, time, and date combination.
 - 'Computing Availability' — RAIM calculation in progress.
 - 'RAIM Available' — RAIM is predicted to be available for the specified waypoint, time, and date.
 - 'RAIM Not Available' — RAIM is predicted to be unavailable for the specified waypoint, time, and date.

Predicting RAIM availability at present position:

- 1) Use the **FMS** Knob to select the 'Aux – GPS Status' Page.
- 2) If necessary, press the **RAIM** Softkey.
- 3) Push the **FMS** Knob. 'P.POS' in the 'Waypoint' Field is highlighted.
- 4) Press the **ENT** Key to accept the present position waypoint entry.
Or:
 - a) Press the **MENU** Key.
 - b) With 'Set WPT to Present Position' highlighted, press the **ENT** Key.
 - c) Press the **ENT** Key again to accept the waypoint entry.
- 5) Use the **FMS** Knob to enter an arrival time and press the **ENT** Key.
- 6) Use the **FMS** Knob to enter an arrival date and press the **ENT** Key.
- 7) With the cursor highlighting 'Compute RAIM?', press the **ENT** Key. Once RAIM availability is computed, one of the following is displayed:
 - 'Compute RAIM?' — RAIM has not been computed for the current waypoint, time, and date combination.
 - 'Computing Availability' — RAIM calculation in progress.
 - 'RAIM Available' — RAIM is predicted to be available for the specified waypoint, time, and date.
 - 'RAIM not Available' — RAIM is predicted to be unavailable for the specified waypoint, time, and date.

GPS SATELLITE SIGNAL STRENGTH

The 'Aux – GPS Status' Page can be helpful in troubleshooting weak (or missing) signal levels due to poor satellite coverage or installation problems. As the GPS receiver locks onto satellites, a signal strength bar is displayed for each satellite in view, with the appropriate satellite PRN number (01-32 or 120-138 for WAAS) below each bar. The progress of satellite acquisition is shown in three stages, as indicated by signal bar appearance:

- » No bar — Receiver is looking for the indicated satellite.
- » Hollow bar — Receiver has found the satellite and is collecting data.
- » Cyan bar — Receiver has collected the necessary data and the satellite signal can be used.
- » Green bar — Satellite is being used for the GPS solution.
- » Checkered bar — Receiver has excluded the satellite (Fault Detection and Exclusion).
- » 'D' indication — Satellite is being used as part of the differential computations.

Each satellite has a 30-second data transmission that must be collected (signal strength bar is hollow) before the satellite may be used for navigation (signal strength bar becomes solid).

SBAS SELECTION (SBAS SOFTKEY IS SELECTED)

In certain situations, such as when the aircraft is outside or on the fringe of the SBAS coverage area, it may be desirable to disable EGNOS, WAAS or MSAS (although it is not recommended). When disabled, the 'SBAS' Field in the 'GPS Status' Box indicates 'Disabled'. There may be a small delay for the 'GPS Status' Box to be updated upon EGNOS, WAAS and MSAS enabling/disabling.

Disabling SBAS:

- 1) Use the **FMS** Knob to select the 'Aux – GPS Status' Page.
- 2) If necessary, press the **SBAS** Softkey.
- 3) Push the **FMS** Knob, and turn the large **FMS** Knob to highlight 'EGNOS', 'MSAS' or 'WAAS'.
- 4) Press the **ENT** Key to uncheck the selected box.
- 5) Push the **FMS** Knob to remove the cursor.

1.4 ACCESSING SYSTEM FUNCTIONALITY

SOFTKEY FUNCTIONS

Selection softkeys are located along the bottom of the displays. The bezel keys below the softkey labels can be used to press the appropriate softkey. There are three types of softkeys. One selects a simple on/off state, indicated by an annunciator on the softkey label displayed as green (on) or gray (off). The next type of softkey selects among several options, indicated by the softkey label changing to reflect the name of the chosen option. The last type of softkey, when pressed, displays another set of softkeys available for the selected function. These softkeys revert to the previous level after 45 seconds of inactivity. When a softkey function is disabled, the softkey label is subdued.

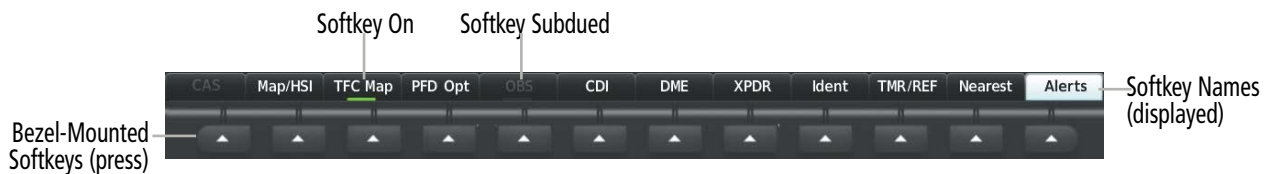


Figure 1-9 Softkeys (First-Level PFD Configuration)

PFD SOFTKEYS

The PFD softkeys provide control over the PFD display and some flight management functions, including GPS, NAV, terrain, traffic, and weather. Each softkey sublevel has a **Back** Softkey which can be pressed to return to the previous level. If messages remain after acknowledgement, the **Alerts** Softkey is black on white. The **Alerts** Softkey is visible in all softkey levels. For the top level softkeys and the transponder (XPDR) levels, the **Ident** Softkey remains visible.

The following table describes PFD softkey functions. Softkeys which display another set of softkeys are indicated in the table by showing the given set as an increased level. For example, the **Map/HSI** Softkey is shown in the Level 1 column. When pressed, the **Map/HSI** Softkey will display another set of softkeys and these softkeys are explained in the Level 2 column. If a softkey in Level 2 provides yet another set of softkey functions, those new available softkeys are then explained in the Level 3 column, etc.

Softkeys are listed in order by row for each level as they appear on the screen left to right.

Level 1	Level 2	Level 3	Description
CAS			When available, opens CAS scrolling buttons. Only selectable when the number of CAS messages exceeds the capacity of the display window.
	CAS Up		When available, scrolls up through CAS messages.
	CAS Down		When available, scrolls down through CAS messages.
Map/HSI			Displays the PFD map display settings softkeys.
	Layout		Displays the PFD map selection softkeys.
		Map Off	Removes the PFD map from display (Inset, HSI, or Traffic).
		Inset Map	Displays the Inset Map.
		HSI Map	Displays the HSI Map.
		Inset Trfc	Replaces the Inset Map with a dedicated traffic display.
		HSI Trfc	Replaces the HSI Map with a dedicated traffic display.

Level 1	Level 2	Level 3	Description
	Detail		Selects desired amount of map detail: - All (no declutter): All map features visible. - Detail 3: Declutters land data. - Detail 2: Declutters land and SUA data. - Detail 1: Removes everything except for the active flight plan.
	Traffic		Displays traffic information on PFD map.
	TER		Selects desired amount of terrain detail: - Topo: Displays topographical data (e.g., coastlines, terrain, rivers, lakes) and elevation scale on PFD map. - REL: Displays relative terrain information on the PFD map. - Off: Removes terrain.
	WX LGND		Displays/removes the name of the selected weather data provider and the weather product icon and age box (for enabled weather products).
	NEXRAD		Displays NEXRAD weather and coverage on PFD map (optional).
	METAR		Displays METAR information on Inset Map (optional).
	Lightning		Adds/removes the display of lightning information on PFD map (optional).
		LTNG Off	Disables lightning function on PFD map. The softkey annunciator is green when the lightning function is off.
		Datalink	Selects the datalink lightning source for the PFD map.
		STRMSCP	Adds or removes the display of Stormscope information on the PFD map.
TFC Map			Replaces the PFD map with a dedicated traffic display.
PFD Opt			Displays second-level softkeys for additional PFD options.
	SVT		Displays additional SVT overlay softkeys (optional).
		Pathways	Displays Pathways on the synthetic vision display.
		Terrain	Enables synthetic terrain depiction.
		HDG LBL	Displays compass heading along the Zero-Pitch Line.
		APT Sign	Displays position markers for airports within approximately 15 nm of the current aircraft position. Airport identifiers are displayed when the airport is within approximately 9 nm.
	Wind		Displays the wind option softkeys.
		Off	Wind information not displayed.
		Option 1	Wind displayed as headwind/tailwind and crosswind arrows with numeric speed components.
		Option 2	Wind displayed as a single arrow which points in the direction the wind is blowing relative to the nose of the aircraft, and a digital display of the magnitude of wind velocity.
		Option 3	Wind displayed as a total wind direction arrow with digital numeric direction and speed.
	DME		Displays the DME Information Window (optional).

Level 1	Level 2	Level 3	Description
	Bearing 1		Cycles the Bearing 1 Information Window through NAV1, NAV2, GPS/waypoint identifier and GPS-derived distance information, ADF/DME frequency, and Off.
	Bearing 2		Cycles the Bearing 2 Information Window through NAV1, NAV2, GPS/waypoint identifier and GPS-derived distance information, ADF/DME frequency, and Off.
	ALT Units		Displays softkeys to select altitude unit parameters.
		Meters	Displays Altimeter settings in meters.
		IN	Displays the BARO setting as inches of mercury.
		HPA	Displays the BARO setting as hectopascals.
	STD Baro		Sets barometric pressure to 29.92 in Hg (1013 hPa if metric units are selected).
OBS			Selects OBS Mode on the CDI when navigating by GPS (only available with active leg). When OBS is on, the softkey annunciator is green.
CDI			Cycles through GPS, NAV1, and NAV2 navigation modes on the CDI.
ADF/DME			Displays the 'ADF/DME Tuning' Window, allowing selection and tuning of the ADF and DME (optional).
XPDR			Displays the transponder selection softkeys.
	Standby		Selects transponder standby mode (transponder does not reply to any interrogations).
	On		Activates transponder (transponder replies to identification interrogations).
	ALT		Selects altitude reporting mode (transponder replies to identification and altitude interrogations).
	VFR		Automatically enters the VFR code (1200 in the U.S.A. only).
	Code		Displays transponder code selection softkeys 0-7.
		0 – 7	Use numbers to enter code.
		Ident	Activates the Special Position Identification (SPI) pulse for 18 seconds, identifying the transponder return on the ATC screen.
		BKSP	Removes numbers entered, one at a time.
	Ident		Activates the Special Position Identification (SPI) pulse for 18 seconds, identifying the transponder return on the ATC screen.
Ident			Activates the Special Position Identification (SPI) pulse for 18 seconds, identifying the transponder return on the ATC screen.
TMR/REF			Displays 'References' Window.
Nearest			Displays 'Nearest Airports' Window.
Alerts or Message			Displays 'Alerts' Window. System generated messages cause the Alerts Softkey to change to a flashing Message Softkey. Pressing the Message Softkey opens the 'Alerts' Window, acknowledges the message, and the softkey reverts to Alerts .

Table 1-2 PFD Softkeys

MFD SOFTKEYS

The MFD softkeys provide control over flight management functions, including GPS, NAV, terrain, traffic, and weather. There are many softkey functions available on the MFD depending on the page group and page selected.

The following table provides an example of the MFD softkey functions accessed from the 'Map – Navigation Map' Page. Further information concerning softkeys providing more navigation and flight planning functions may be found in the Flight Management Section. Terrain, traffic, and weather softkey descriptions may be found in the Hazard Avoidance Section. Further description of optional equipment and corresponding softkey functions may be found in the Additional Features Section.

Level 1	Level 2	Level 3	Description
Engine			Displays the 'EIS – Engine' Page and second-level engine softkeys; press again to exit page (see the EIS Section for more information).
	Engine		Returns to previously shown softkeys.
	DEC Fuel		Decreases calculated fuel remaining by 1 gallon for each softkey press.
	INC Fuel		Increases calculated fuel remaining by 1 gallon for each softkey press.
	RST Fuel		Resets calculated fuel remaining to the maximum fuel capacity (50 gallons).
Map Opt			Displays map softkey selectable features.
	Traffic		Displays traffic information on the 'Map – Navigation Map' Page.
	Inset		Displays second level softkeys for the VSD Inset.
		Off	Removes VSD Inset from 'Map – Navigation Map' Page.
		VSD	Displays VSD Inset profile information of terrain/obstacles along the current track, vertical track vector and Selected Altitude.
		VSD	Determines information displayed on VSD Inset: - Auto: Automatically displays either VSD profile information for active flight plan or along current track with no active flight plan. - FPL: Displays VSD profile information for active flight plan. - TRK: Displays VSD profile information along current track.
	TER		Selects desired amount of terrain detail: - Off: No terrain information shown on MFD map. - Topo: Displays topographical data (e.g., coastlines, terrain, rivers, lakes) and elevation scale on MFD map. - REL: Displays relative terrain information on MFD map.
	AWY		Displays airways on the map; cycles through the following: - Off: No airways are displayed. - On: All airways are displayed. - LO: Only low altitude airways are displayed. - HI: Only high altitude airways are displayed.
	STRMSCP		Adds or removes the display of Stormscope information on the 'Map – Navigation Map' Page (optional).

Level 1	Level 2	Level 3	Description
	NXRD or NEXRAD or PRECIP		Displays precipitation weather information on the 'Map – Navigation Map' Page (optional): - Off : No NEXRAD weather is displayed. - US : NEXRAD weather displayed for the US. - REG : NEXRAD weather displayed for a specific region. - All : NEXRAD weather displayed for all locations.
	XM LTNG or DL LTNG		Displays lightning information on the 'Map – Navigation Map' Page (optional).
	METAR		Displays METAR information on MFD Map (optional).
	Legend		Displays legends for the displayed weather products (optional).
Detail			Selects desired amount of map detail: - All (no declutter): All map features visible. - Detail 3 : Declutters land data. - Detail 2 : Declutters land and SUA data. - Detail 1 : Removes everything except for the active flight plan.
Charts			Displays optional airport and terminal procedure charts, when available.
	CHRT Opt		Displays chart display settings softkeys, when available.
		ROT CCW	Rotates chart 90 degrees counter clockwise.
		ROT CW	Rotates chart 90 degrees clockwise.
		All	Displays entire approach chart.
		Header	Displays approach chart header view (i.e., briefing strip).
		Plan	Displays approach chart in two dimensional plan view.
		Profile	Displays the approach chart descent profile strip.
		Minimums	Displays the minimum descent altitude/visibility strip at the bottom of the approach chart.
		Fit WDT	Chart zoom adjusted to fill width of display.
		Full SCN	When the annunciator bar is green, full screen mode is enabled. The annunciator bar is grey when in split screen mode.
	SYNC		Displays the chart associated with the current phase of flight.
	Info		Returns to the selected airport information chart (Airport Diagram, Alternate Minimums, Climb/Descent Table, Diverse Vector Area, Hot Spot, INOP Components, LAHSO, and Takeoff Minimums).
	DP		Displays departure procedure chart.
	STAR		Displays standard terminal arrival procedure chart.
	APR		Displays approach procedure chart.
	NOTAM		Displays NOTAM information for selected airport, when available.
	Charts		Displays optional airport and terminal procedure charts, when available.
	Checklist		Displays optional checklists, when available.
Checklist			Displays optional checklists, when available.

Table 1-3 MFD 'Map – Navigation Map' Page Softkeys

MENUS

The system has a **MENU** Key that, when pressed, displays a context-sensitive list of options. This options list allows the user to access additional features or make settings changes which specifically relate to the currently displayed window/page. There is no all-encompassing menu. Some menus provide access to additional submenus that are used to view, edit, select, and review options. Menus display 'No Options' when there are no options for the window/page selected. The main controls used in association with all window/page group operations are described in this section. Softkey selection does not display menus or submenus.

Navigating the 'Page Menu' Window:

- 1) Press the **MENU** Key to display the 'Page Menu' Window.
- 2) Turn the **FMS** Knob to scroll through a list of available options (a scroll bar appears to the right of the window when the option list is longer than the window).
- 3) Press the **ENT** Key to select the highlighted option.
- 4) The **CLR** Key may be pressed to remove the menu and cancel the operation. Pushing the **FMS** Knob also removes the displayed menu.

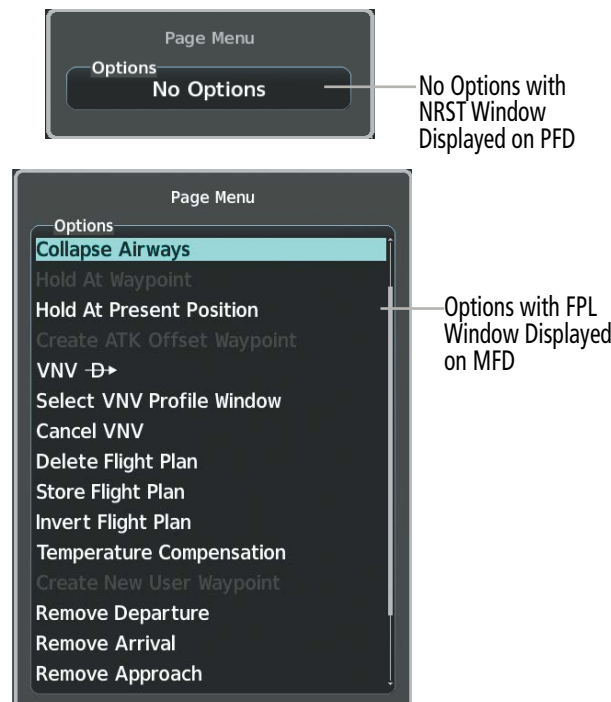


Figure 1-10 Page Menu Examples

MFD PAGE GROUPS



NOTE: Refer to other supporting sections in this Pilot's Guide for details on specific pages.

Information on the MFD is presented on pages grouped according to function. The page group and active page title are displayed in the upper center of the screen, below the Navigation Status Box. In the bottom right corner of the screen, a page group window is displayed by turning either **FMS** Knob. The page group tabs are displayed along the bottom of the window. The page titles are displayed in a list above the page group tabs. The current page group and current page within the group are shown in cyan.

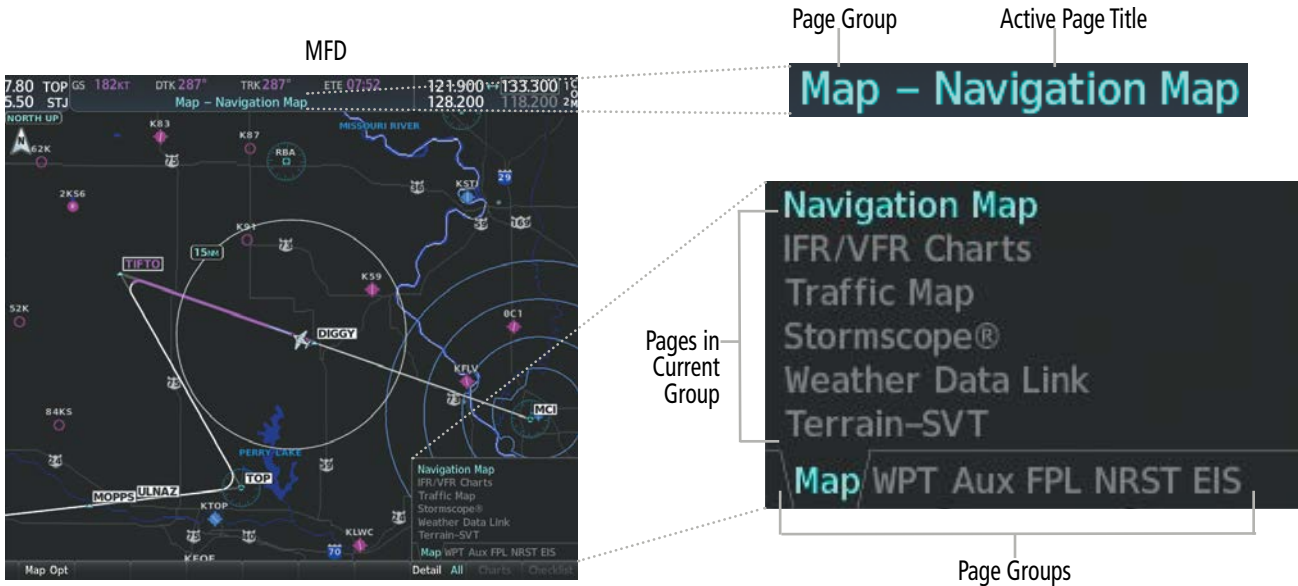


Figure 1-11 Page Title and Page Group Example

The main page groups are navigated using the **FMS** Knob; specific pages within each group can vary depending on the configuration of optional equipment.

Selecting a page using the **FMS** Knob:

- 1) Turn the large **FMS** Knob to display the list of page groups; continue turning the large **FMS** Knob until the desired page group is selected.
- 2) Turn the small **FMS** Knob to display the desired page within a specific page group.

There are several pages which may be selected by pressing the appropriate softkey at the bottom of the page (or from the page menu). In this case, the active page title will change when a different page softkey is selected, but the page will remain the same (i.e., the **Radio** and **Info** softkeys show different active page titles ('Aux – XM Radio' and 'Aux – XM Information' respectively) within the same page, 'XM Radio'.

Page Group	Pages within Page Group
Map (Map Page Group)	Navigation Map IFR/VFR Charts - VFR Charts (VFR Softkey) - IFR Low Charts (IFR Low Softkey) - IFR High Charts (IFR High Softkey) Traffic Map Stormscope® (optional) Weather Data Link (optional) Terrain-SVT

Page Group	Pages within Page Group
WPT (Waypoint Page Group)	Airport/Procedures/Weather Information Pages - Airport Information (Info-1 Softkey) - Airport Directory Information (Info-2 Softkey) - Departure Information (DP Softkey) - Arrival Information (STAR Softkey) - Approach Information (APR Softkey) - Weather Information (WX Softkey) - NOTAM information (NOTAM Softkey) - Electronic checklists (Checklist Softkey) Intersection Information NDB Information VOR Information VRP Information User WPT (Waypoint) Information
Aux (Auxiliary Page Group)	Trip Planning Utility GPS Status System Setup 1 and 2 XM Radio (optional) - XM Radio (Radio Softkey) - XM Information (Info Softkey) Satellite Phone (optional) - Telephone (Phone Softkey) - Text Messaging (SMS Softkey) System Status ADS-B Status Connex Setup Databases
FPL (Flight Plan Page Group)	Active Flight Plan - Wide View, Narrow View (View Softkey) Flight Plan Catalog - Stored Flight Plan (New Softkey)
NRST (Nearest Page Group)	Nearest Airports Nearest Intersections Nearest NDB Nearest VOR Nearest VRP Nearest User WPTS (Waypoints) Nearest Frequencies Nearest Airspaces
EIS	'EIS – Engine' Page

Table 1-4 Page Groups and Pages

PROCEDURE PAGES (PROC)

The procedure pages may be accessed at any time on the MFD by pressing the **PROC** Key. A menu is initialized, and when a departure, approach, or arrival is selected, the appropriate procedure loading page is opened. Turning the **FMS** Knob does not scroll through the procedure pages:

- » Departure Loading
- » Arrival Loading
- » Approach Loading

SPLIT SCREEN FUNCTIONALITY

Chart pages may be viewed in split screen mode with either the 'Map – Navigation Map' or 'FPL – Active Flight Plan' Page open. To activate the split screen functionality, press the **Charts** Softkey. Two display panes are displayed on the MFD. If split screen is activated from the 'Map – Navigation Map' Page, the page title will show 'Map – Chart + Navigation Map'. If split screen is activated from the 'FPL – Active Flight Plan' Page, the page title will change to show 'FPL – Chart + Active Flight Plan'.

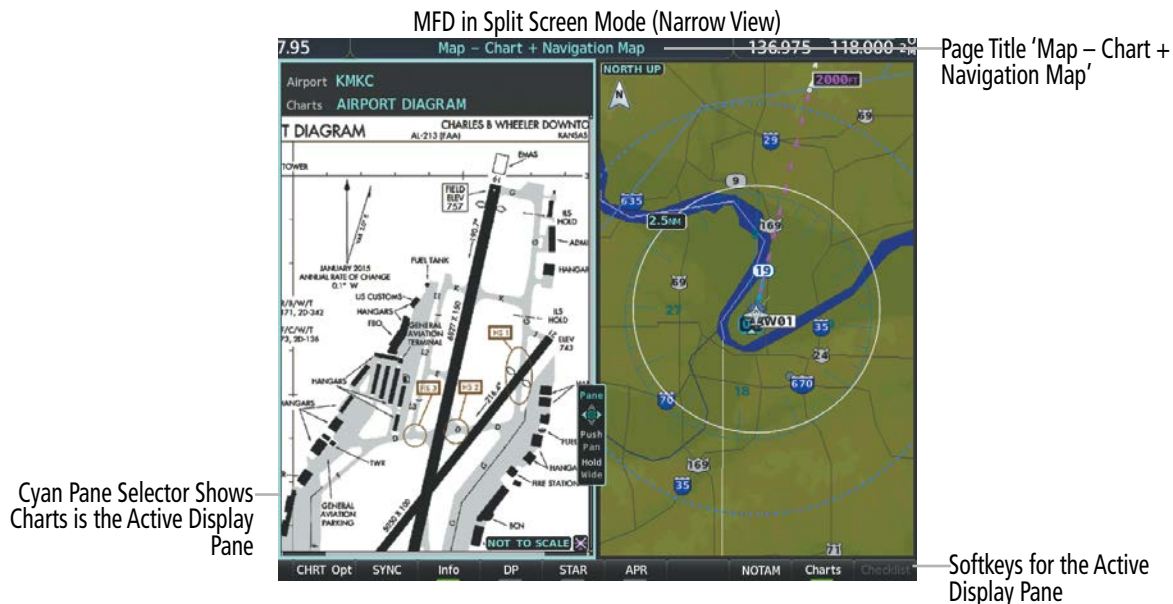


Figure 1-12 Split Screen in Narrow View

CONTROLLING DISPLAY PANES

In split screen mode, the active display pane is outlined by a cyan box called the pane selector. Softkeys and menu options will automatically change depending on which display pane is active. Display panes may be displayed vertically in Narrow View, or horizontally in Wide View. In Narrow View, move the **Joystick** left or right to move the pane selector. In Wide View, move the **Joystick** up and down to move the pane selector. To change between Wide View and Narrow View, push and hold the **Joystick**.



Figure 1-13 Split Screen in Wide View

For information on viewing charts and the 'FPL – Active Flight Plan' Page with the flight plan map, see the Flight Management Section. For more information on charts and how to enable charts full screen, see the Additional Features Section.

Enabling/disabling split screen mode:

- 1) From the 'Map – Navigation Map' Page or the 'FPL – Active Flight Plan' Page press the **Charts** Softkey, or press the **MENU** Key and select 'Chart Mode On'. If necessary, press the **CHRT Opt** Softkey and press the **Full SCN** Softkey to disable full screen mode.
- 2) To disable the split screen mode, press the **Charts** Softkey again or press the **MENU** Key and select 'Chart Mode Off'. The display returns to the base page, either the 'Map – Navigation Map' Page or the 'FPL – Active Flight Plan' Page.

SYSTEM SETTINGS

System settings are managed from the 'Aux – System Setup (1 or 2)' pages. Fields shown in cyan text may be edited. Managing crew profiles, system time format, display units, and audio voice format settings are discussed in this section. For other system settings, see the reference given to their respective sections.

- Time Format (local or UTC)
- Display (measurement) Units
- BARO Transition Alert (see the Flight Instruments Section)
- Airspace Alerts (see the Flight Management Section)
- Arrival Alert (see the Flight Management Section)
- Flight Director Format (see the AFCS Section)
- MFD Data Bar (Navigation Status Box) Fields (see the Flight Management Section)
- GPS CDI (see the Flight Instruments Section)
- Nearest Airport (see the Flight Management Section)

- Nearest Airport (see the Flight Management Section)
- Stability & Protection (see the Additional Features Section)
- Audio
- Charts (see the Additional Features Section)

If desired, the default system settings may be restored at any time.

Restoring system setup defaults:

- 1) Use the **FMS** Knob to select the 'Aux – System Setup (1 or 2)' Page.
- 2) Press the **Defaults** Softkey; or press the **MENU** Key, highlight 'Restore Page Defaults', and press the **ENT** Key. The message 'Restore Setup (1 or 2) Page defaults?' is displayed.
- 3) With 'OK' highlighted, press the **ENT** Key.

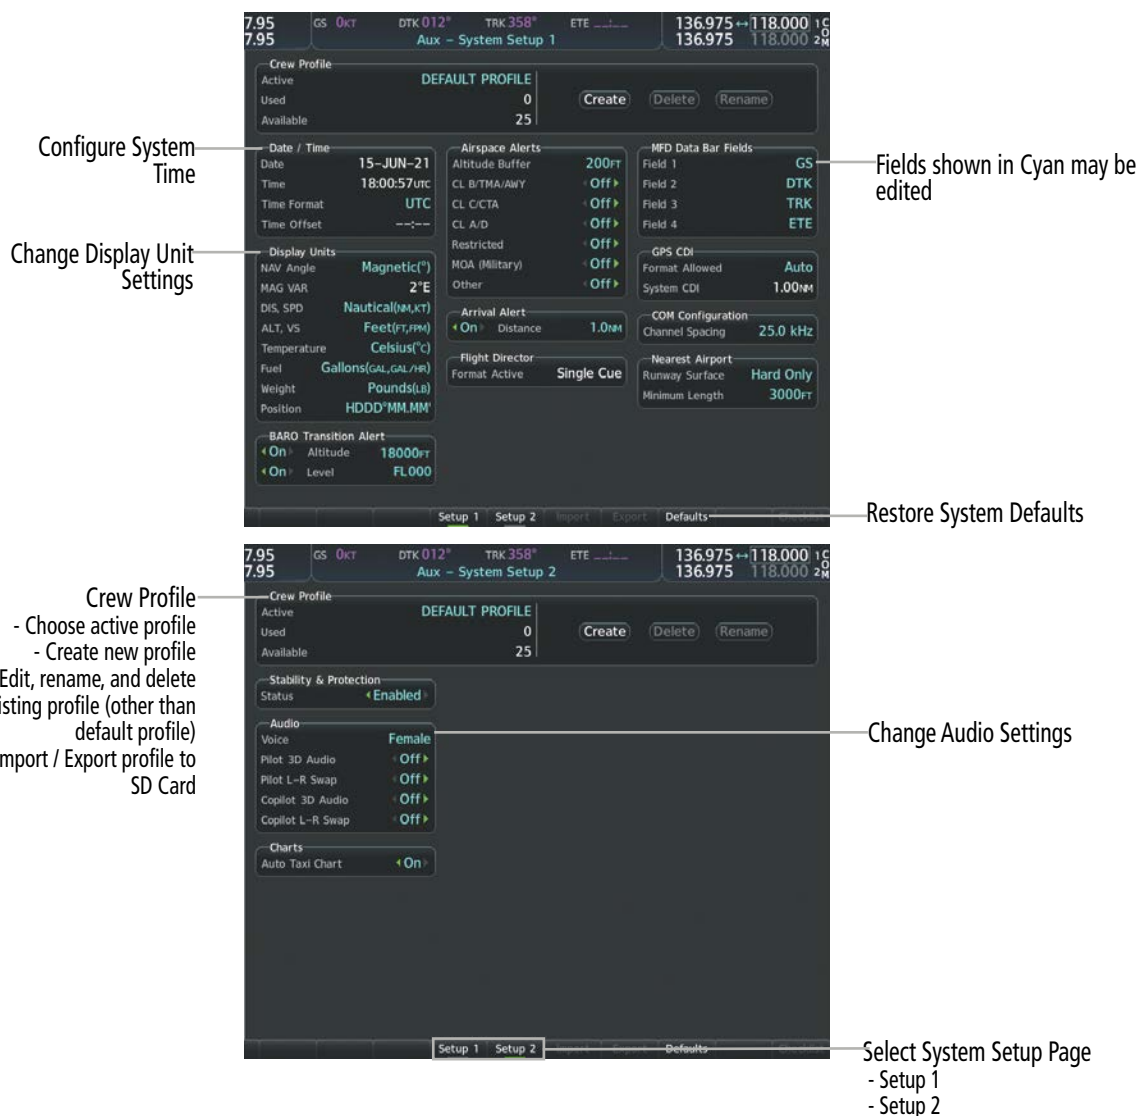


Figure 1-14 'Aux – System Setup 1/2' Pages (Fields Shown In Cyan May Be Edited)

CREW PROFILES

System settings may be saved under a crew profile. The system can store up to 25 profiles. The currently active profile, the amount of memory used, and the amount of memory available are shown at the top of the System Setup pages in the box labeled 'Crew Profile'. From here, crew profiles may be created, selected, renamed, or deleted. Crew profiles may also be exported from the system to an SD card, or imported from an SD card into the system.



Figure 1-15 Crew Profile Settings on 'Aux – System Setup 1' Page

Creating a profile:

- 1) Use the **FMS** Knob to select the 'Aux – System Setup (1 or 2)' Page.
- 2) Push the **FMS** Knob momentarily to activate the flashing cursor.
- 3) Turn the large **FMS** Knob to highlight 'Create' in the 'Crew Profile' Box.
- 4) Press the **ENT** Key. A 'Create Profile' Window is displayed.
- 5) Use the **FMS** Knob to enter a profile name up to 16 characters long and press the **ENT** Key. Crew profile names cannot begin with a blank as the first character.
- 6) In the next field, use the small **FMS** Knob to select the desired settings upon which to base the new profile. Profiles can be created based on Garmin factory defaults, default profile settings (initially based on Garmin factory defaults unless edited by the pilot), or other previously created (i.e., current) profile settings.
- 7) Press the **ENT** Key.

- 8) With 'Create' highlighted, press the **ENT** Key to create the profile.

Or:

Use the large **FMS** Knob to select 'Create & Activate' and press the **ENT** Key to activate the new profile.

- 9) To cancel the process, select 'Cancel' with the large **FMS** Knob and press the **ENT** Key.

Selecting an active profile:

- 1) Use the **FMS** Knob to select the 'Aux – System Setup (1 or 2)' Page.
- 2) Push the **FMS** Knob momentarily to activate the flashing cursor.
- 3) Turn the large **FMS** Knob to highlight the 'Active' Field in the 'Crew Profile' Box.
- 4) Turn the small **FMS** Knob to display the crew profile list and highlight the desired profile.
- 5) Press the **ENT** Key. The system loads and displays the system settings for the selected profile.

Renaming a profile:

- 1) Use the **FMS** Knob to select the 'Aux – System Setup (1 or 2)' Page.
- 2) Push the **FMS** Knob momentarily to activate the flashing cursor.
- 3) Turn the large **FMS** Knob to highlight 'Rename' in the 'Crew Profile' Box.
- 4) Press the **ENT** Key.
- 5) In the 'Rename Profile' Window, turn the **FMS** Knob to select the profile to rename.
- 6) Press the **ENT** Key.
- 7) Use the **FMS** Knob to enter a new profile name up to 16 characters long and press the **ENT** Key.
- 8) With 'Rename' highlighted, press the **ENT** Key.
- 9) To cancel the process, use the large **FMS** Knob to select 'Cancel' and press the **ENT** Key.

Deleting a profile:

- 1) Use the **FMS** Knob to select the 'Aux – System Setup (1 or 2)' Page.
- 2) Push the **FMS** Knob momentarily to activate the flashing cursor.
- 3) Turn the large **FMS** Knob to highlight 'Delete' in the 'Crew Profile' Box.
- 4) Press the **ENT** Key.
- 5) In the 'Delete Profile' Window, turn the **FMS** Knob to select the profile to delete.
- 6) Press the **ENT** Key.
- 7) With 'Delete' highlighted, press the **ENT** Key.
- 8) To cancel the process, use the large **FMS** Knob to select 'Cancel' and press the **ENT** Key.


Importing a profile from an SD card:

- 1) Insert an SD card containing the crew profile(s) into the top card slot on the MFD.
- 2) Turn the **FMS** Knob to select the 'Aux – System Setup (1 or 2)' Page.
- 3) Press the **Import** Softkey.
Or:
 - a) Press the **MENU** Key.
 - b) Turn the **FMS** Knob to highlight 'Import Crew Profile' and press the **ENT** Key.
- 4) The system displays the 'Crew Profile Importing' Window with 'Import' highlighted. Turn the large **FMS** Knob to highlight the 'Profile Name' Field. Next, scroll to the desired profile name with the **FMS** Knob, then press the **ENT** Key. Press the **ENT** Key with 'Import' highlighted.
- 5) If the imported profile name is the same as an existing profile on the system, the system displays an 'Overwrite existing profile? OK or CANCEL' prompt. Press the **ENT** Key to replace the profile on the system with the profile imported from the SD card, or turn the **FMS** Knob to highlight 'CANCEL' and press the **ENT** Key to return to the 'Crew Profile Importing' Window.
- 6) If successful, the system displays 'Crew profile import succeeded.' in the 'Crew Profile Importing' Window. With 'OK' highlighted, press the **ENT** or **CLR** Key or push the **FMS** Knob to return to the 'Aux – System Setup (1 or 2)' Page. The imported profile becomes the active profile.

**Figure 1-16 Pilot Profile Import 'Aux – System Setup (1 or 2)' Page****Exporting a profile to an SD card:**

- 1) Insert the SD card for storing the crew profile into the top card slot on the MFD.
- 2) Use the **FMS** Knob to select the 'Aux – System Setup (1 or 2)' Page.
- 3) Press the **Export** Softkey. The system displays the 'Crew Profile Exporting' Window.
Or:
 - a) Press the **MENU** Key.
 - b) Turn the **FMS** Knob to highlight 'Export Crew Profile' and press the **ENT** Key.

- 4) To export the crew profile using the current selected profile, press the **ENT** Key with 'Export' highlighted. To change the selected profile, turn the large **FMS** Knob to highlight the 'Profile Name' Field. Next, scroll to the desired profile name with the **FMS** Knob, then press the **ENT** Key. Press the **ENT** Key with 'Export' highlighted.
- 5) If the selected profile to be exported is the same as an existing profile file name on the SD card, the system displays an 'Overwrite existing profile? OK or CANCEL' prompt. Press the **ENT** Key to replace the profile on the SD card with the profile to be exported, or turn the **FMS** Knob to highlight 'CANCEL' and press the **ENT** Key to return to the 'Pilot Profile Exporting' Window without exporting the profile.
- 6) If successful, the window displays 'Crew profile export succeeded.' With 'OK' highlighted, press the **ENT** or **CLR** Key, or push the **FMS** Knob to return to the 'Aux – System Setup (1 or 2)' Page.



'Crew Profile Exporting'
Window



Export Successful

Figure 1-17 Pilot Profile Export on the 'Aux – System Setup (1 or 2)' Page

CREW PROFILE IMPORT/EXPORT MESSAGES

In certain circumstances, some messages may appear in conjunction with others:

Crew Profile Import/Export Message	Description
'No crew profile plan files found.'	Displayed if the SD card does not have one or more valid crew profile file names.
'Overwrite existing profile?'	Displayed if the profile name matches the name of an existing profile.
'Profile name invalid. Enter a different profile name.'	Displayed if the profile name is invalid.
'All available crew profiles in use. Delete a profile before importing another.'	Displayed if the maximum number of crew profiles has been reached.
'Crew profile import failed.'	Displayed if the importing operation fails for any other reason.
'Crew profile import succeeded.'	Displayed if the importing operation succeeds.
'Overwrite existing file?'	Displayed if the file name matches the name of an existing file on the SD card.
'Crew profile export failed.'	Displayed if the export operation fails.
'Crew profile export succeeded.'	Displayed if the export operation succeeds.

Table 1-5 Crew Profile Import/Export Messages

DATE/TIME

The system obtains the current Universal Coordinated Time (UTC) date and time directly from the GPS satellite signals (shown on the 'Aux – GPS Status' Page). System time (displayed in the lower right corner of the PFD) can be displayed in three formats: local 12-hr, local 24-hr, or UTC. Local time is set by adding/subtracting an offset (hours:minutes) to/from UTC.

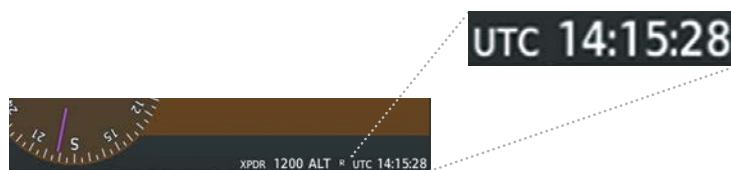


Figure 1-18 System Time on the PFD (UTC Format)

Configuring the system time:

- 1) Use the **FMS** Knob (and press the **Setup 1** Softkey, if necessary) to select the 'Aux – System Setup 1' Page.
- 2) Push the **FMS** Knob momentarily to activate the flashing cursor.
- 3) Turn the large **FMS** Knob to highlight the 'Time Format' Field.
- 4) Turn the small **FMS** Knob to select the desired format and press the **ENT** Key to confirm selection. If local time format is selected, the 'Time Offset' Field is highlighted.
- 5) If necessary, use the **FMS** Knob to enter the desired time offset ($\pm$ HH:MM) and press the **ENT** Key to confirm selection.

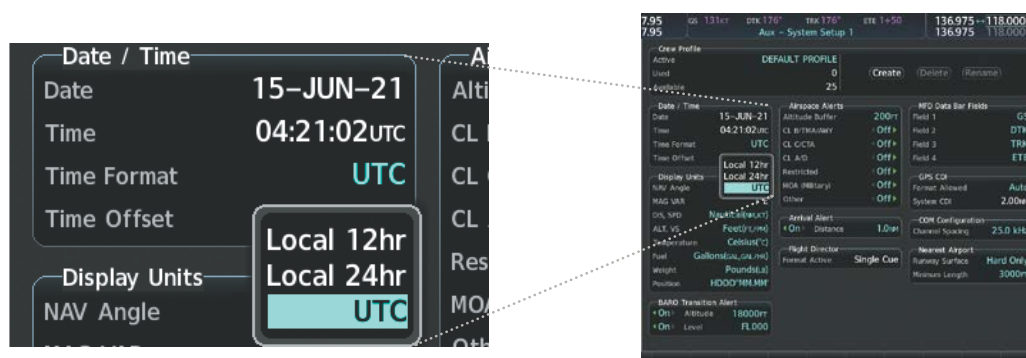


Figure 1-19 Date/Time Settings on 'Aux – System Setup 1' Page

DISPLAY UNITS

Units in which various quantities are displayed on the system screens are listed on the System Setup Page. The Navigation Angle reference, the Temperature units, and the Position units can be set from here.

Units in which various quantities are displayed on the system screens are listed on the 'Aux – System Setup 1' Page. The navigation angle reference, distance, speed, altitude, vertical speed, temperature, fuel, weight and position units can be set from this page.

Category	Settings	Affected Quantities	Exceptions
Navigation Angle	Magnetic (North) ¹ True (North)	Heading Course Bearing Track Desired Track Wind Direction (Trip Planning Page)	N/A
Distance and Speed	Metric Nautical ¹	Crosstrack Error (HSI) Bearing Distances (Information Windows) DME Distance (Information Window) Flight Plan Distances Map Ranges DIS, GS, TAS, XTK Fields (Navigation Status Box) All Distances on MFD Altitude Buffer Distance (System Setup) Arrival Alert Trigger Distance (System Setup) All Speeds on MFD	Airspeed Indicator True Airspeed (PFD) Wind Speed Vector Map Range ('Map – Traffic Map' Page) CDI Scaling (System Setup) Fuel Range Calculation (EIS)
Altitude and Vertical Speed	Feet ¹ Meters	All Altitudes on MFD All Elevations on MFD	Altimeter Vertical Speed Indicator VNV Altitudes (Active Flight Plan)
Temperature	Celsius ¹ Fahrenheit	All Temperatures on PFD Total Air Temperature (Trip Planning Page)	Engine Indication System (EIS)
Fuel and Fuel Flow	Gallons ¹ IMP GALS Kilograms Liters Pounds	Fuel Parameters (Trip Planning Page)	Engine Indication System (EIS)
Weight	Kilograms Pounds ¹	N/A	N/A
Position	HDDD°MM.MM' ¹ HDDD°MM'SS.S" MGRS 1m MGRS 10m UTM/UPS	All Positions	N/A

¹ Default setting

Table 1-6 Display Units Settings ('Aux – System Setup 1' Page)

Changing a display unit setting:

- 1) Use the **FMS** Knob to select the 'Aux – System Setup 1' Page.
- 2) Push the **FMS** Knob momentarily to activate the flashing cursor.
- 3) Turn the large **FMS** Knob to highlight the desired field in the 'Display Units' Box.

- 4) Turn the small **FMS** Knob to select the desired units.
- 5) Press the **ENT** Key. Press the **CLR** Key to cancel the action without changing the units.



NOTE: The altimeter barometric pressure units may only be changed using softkeys on the PFD.

AUDIO SETTINGS

The 'Audio' Box on the 'Aux – System Setup 2' Page controls the audio alert voice setting (male or female), 3D Audio, and L-R Swap. See the Audio and CNS Section for more audio setting details.

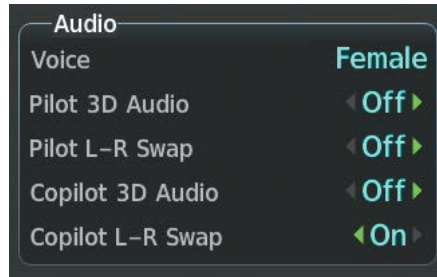


Figure 1-20 Audio Settings on 'Aux – System Setup 2' Page

Changing the audio alert voice:

- 1) Use the **FMS** Knob (and press the **Setup 2** Softkey, if necessary) to select the 'Aux – System Setup 2' Page.
- 2) Push the **FMS** Knob momentarily to activate the flashing cursor.
- 3) Turn the large **FMS** Knob to highlight the 'Voice' Field in the 'Audio' Box.
- 4) Use the **FMS** Knob to select the desired voice setting and press the **ENT** Key.

Enabling/disabling 3D Audio:

- 1) Use the **FMS** Knob (and press the **Setup 2** Softkey, if necessary) to select the 'Aux – System Setup 2' Page.
- 2) Push the **FMS** Knob momentarily to activate the flashing cursor.
- 3) Turn the large **FMS** Knob to highlight the 'Pilot 3D Audio' or 'Copilot 3D Audio' Field in the 'Audio' Box.
- 4) Turn the small **FMS** Knob clockwise to turn 3D Audio 'On' or counterclockwise to turn it 'Off'.
- 5) Push the **FMS** Knob momentarily to remove the flashing cursor.

Swapping left/right audio in a headset:

- 1) Use the **FMS** Knob (and press the **Setup 2** Softkey, if necessary) to select the 'Aux – System Setup 2' Page.
- 2) Push the **FMS** Knob momentarily to activate the flashing cursor.
- 3) Turn the large **FMS** Knob to highlight the 'Pilot L-R Swap' or 'Copilot L-R Swap' Field in the 'Audio' Box.
- 4) Turn the small **FMS** Knob clockwise to turn the swap 'On' or counterclockwise to turn it 'Off'.
- 5) Push the **FMS** Knob momentarily to remove the flashing cursor.

SYSTEM UTILITIES

UTILITY PAGE

For flight planning purposes, timers, trip statistics, and a scheduler feature are provided on the 'Aux – Utility' Page. The timers available include a stopwatch-like generic timer, a total time in flight timer, and a record of the time of departure. Trip statistics—odometer, trip odometer, and average trip and maximum groundspeeds—are displayed from the time of the last reset.

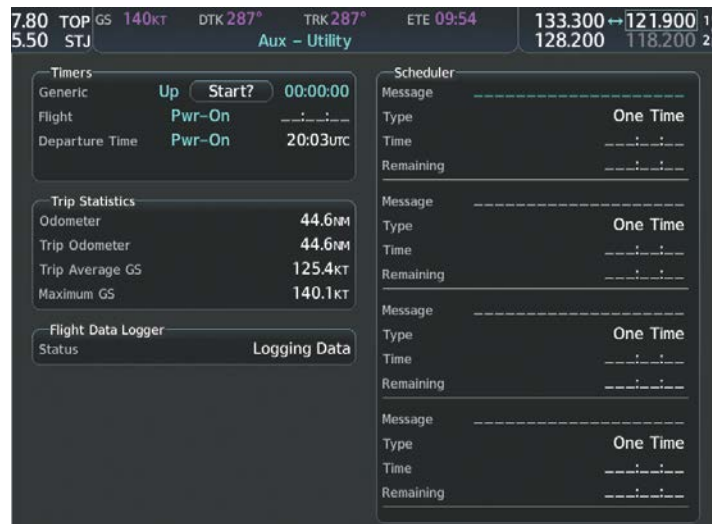


Figure 1-21 'Aux – Utility' Page

TIMERS

The system timers available on the 'Aux – Utility' Page include:

- » Stopwatch-like Generic Timer
- » Total-time-in-flight Timer
- » Time Since Departure

The generic timer can be set to count up or down from a specified time (HH:MM:SS). When the countdown on the timer reaches zero, the digits begin to count up from zero. If the timer is reset before reaching zero on a countdown, the digits are reset to the initial value. If the timer is counting up when reset, the digits return to zero. The timer on the 'Aux – Utility' Page is independent of the timer on the PFD.

Setting the generic timer (MFD):

- 1) Use the **FMS** Knob to select the 'Aux – Utility' Page.
- 2) Push the **FMS** Knob momentarily to activate the flashing cursor.
- 3) Turn the small **FMS** Knob to select the timer counting direction (Up/Dn) and press the **ENT** Key.
- 4) If a starting time is desired:
 - a) Use the large **FMS** Knob to highlight the 'HH:MM:SS' Field.
 - b) Use the **FMS** Knob to enter the desired time and press the **ENT** Key.
- 5) Turn the large **FMS** Knob to highlight 'Start?' and press the **ENT** Key to start the timer. The field changes to 'Stop?'.

- 6) To stop the timer, press the **ENT** Key with 'Stop?' highlighted. The field changes to 'Reset?'.
- 7) To reset the timer, press the **ENT** Key with 'Reset?' highlighted. The field changes back to 'Start?' and the digits are reset.

The flight timer can be set to count up from zero starting at system power application or from the time the aircraft lifts off. The timer can also be reset to zero at any time.

Setting the flight timer starting criterion:

- 1) Use the **FMS** Knob to select the 'Aux – Utility' Page.
- 2) Push the **FMS** Knob momentarily to activate the flashing cursor.
- 3) Turn the large **FMS** Knob to highlight the 'Flight' Field in the 'Timers' Box.
- 4) Turn the small **FMS** Knob to select the starting criterion ('Pwr-On' or 'In-Air') and press the **ENT** Key.

Resetting the flight timer:

- 1) Use the **FMS** Knob to select the 'Aux – Utility' Page.
- 2) Press the **MENU** Key.
- 3) With 'Reset Flight Timer' highlighted, press the **ENT** Key.

The system records the time at which departure occurs, depending on whether the pilot prefers the time to be recorded from system power application or from aircraft lift off. The displayed departure time can also be reset to display the current time at the point of reset. The format in which the time is displayed is controlled from the 'Aux – System Setup 1' Page.

Setting the departure timer starting criterion:

- 1) Use the **FMS** Knob to select the 'Aux – Utility' Page.
- 2) Push the **FMS** Knob momentarily to activate the flashing cursor.
- 3) Turn the large **FMS** Knob to highlight the 'Departure Time' Field in the 'Timers' Box.
- 4) Turn the small **FMS** Knob to select the starting criterion ('Pwr-On' or 'In-Air') and press the **ENT** Key.

Resetting the departure time:

- 1) Use the **FMS** Knob to select the 'Aux – Utility' Page.
- 2) Press the **MENU** Key.
- 3) Use the **FMS** Knob to highlight 'Reset Departure Time' and press the **ENT** Key.

TRIP STATISTICS

The odometer and trip odometer record the total mileage traveled from the last reset. These odometers can be reset independently. Resetting the trip odometer also resets the trip average groundspeed. Maximum groundspeed for the period of time since the last reset is also displayed.

Resetting trip statistics displays:

- 1) Use the **FMS** Knob to select the 'Aux – Utility' Page.
- 2) Press the **MENU** Key. The following reset options for trip statistics are displayed:
 - 'Reset Trip ODOM/AVG GS' — Resets trip average groundspeed display and odometer
 - 'Reset Odometer' — Resets odometer display only
 - 'Reset Maximum Speed' — Resets maximum speed display only
 - 'Reset All' — Resets flight timer, departure timer, odometers, and groundspeed displays
- 3) Use the **FMS** Knob to highlight the desired reset option and press the **ENT** Key. The selected parameters are reset to zero and begin to display data from the point of reset.

SCHEDULER

The system's scheduler feature can be used to enter and display reminder messages (e.g., "Switch fuel tanks", "Overhaul") in the 'Alerts' Window on the PFD. Messages can be set to display based on a specific date and time (event), once the message timer reaches zero (one-time; default setting), or recurrently whenever the message timer reaches zero (periodic). Message timers set to periodic alerting automatically reset to the original timer value once the message is displayed. When power is cycled, messages are retained until deleted, and message timer countdown is restarted.

Scheduler messages appear in the 'Alerts' Window on the PFD and cause the **Alerts** Softkey label to change to a flashing "Message" label. Pressing the **Message** Softkey opens the 'Alerts' Window and acknowledges the scheduler message. The softkey reverts to the "Alerts" label. Pressing the softkey again removes the 'Alerts' Window from the display and the scheduler message is deleted from the message queue.

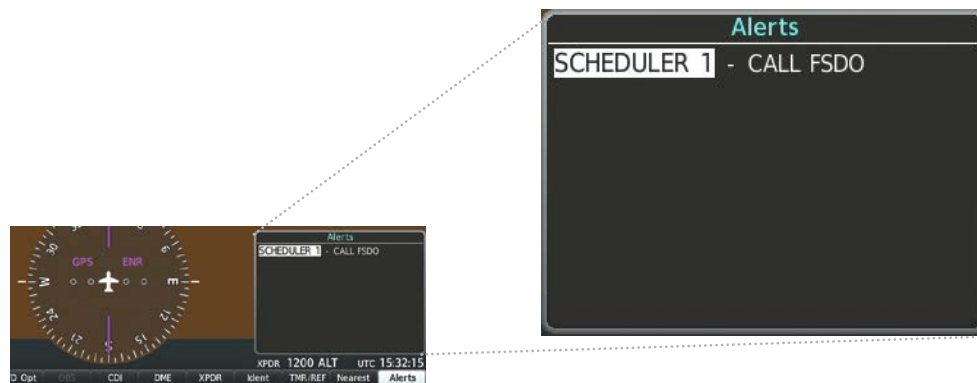


Figure 1-22 PFD 'Alerts' Window

Entering a scheduler message:

- 1) Use the **FMS** Knob to select the 'Aux – Utility' Page.
- 2) Push the **FMS** Knob momentarily to activate the flashing cursor.
- 3) Turn the large **FMS** Knob to highlight the first empty field within the 'Scheduler' Box.
- 4) Use the **FMS** Knob to enter text within the 'Message' Field to be displayed in the 'Alerts' Window and press the **ENT** Key.

- 5) Press the **ENT** Key again or use the large **FMS** Knob to move the cursor to the 'Type' Field.
- 6) Turn the small **FMS** Knob to select the message alert type:
 - 'Event' — Message issued at the specified date/time
 - 'One Time' — Message issued when the message timer reaches zero (default setting)
 - 'Periodic' — Message issued each time the message timer reaches zero
- 7) Press the **ENT** Key again or use the large **FMS** Knob to move the cursor to the next field.
- 8) For periodic and one-time messages, use the **FMS** Knob to enter the timer value (HHH:MM:SS) from which to countdown and press the **ENT** Key.
- 9) For event-based messages:
 - a) Use the **FMS** Knob to enter the desired date (DD-MMM-YY) and press the **ENT** Key.
 - b) Press the **ENT** Key again or use the large **FMS** Knob to move the cursor to the next field.
 - c) Use the **FMS** Knob to enter the desired time (HH:MM) and press the **ENT** Key.
- 10) Push the **FMS** Knob to remove the cursor, or use the large **FMS** Knob to move the cursor to enter the next message.

Deleting a scheduler message:

- 1) Use the **FMS** Knob to select the 'Aux – Utility' Page.
- 2) Push the **FMS** Knob momentarily to activate the flashing cursor.
- 3) Turn the large **FMS** Knob to highlight the 'Message' Field of the scheduler message to be deleted.
- 4) Press the **CLR** Key to clear the message text. If the **CLR** Key is pressed again, the message is restored.
- 5) Press the **ENT** Key to confirm message deletion.

1.5 DISPLAY BACKLIGHTING

The PFD and MFD display backlighting, the PFD and MFD bezels, and the Audio Panel keys can be adjusted manually in one of two ways:

- Using the individual dimmer bus control(s)
- Using the PFD Setup Menu and the following procedures in normal operating mode. In Reversionary Mode, adjustments can be made from any remaining display.

Adjusting display backlighting:

- 1) Press the PFD **MENU** Key to display the 'PFD Setup Menu' Window. 'Auto' is now highlighted next to 'PFD Display'.
- 2) Turn the small **FMS** Knob to select 'Manual' and press the **ENT** Key. The intensity value is now highlighted.
- 3) Use the **FMS** Knob to enter the desired backlighting setting, then press the **ENT** Key.
- 4) If desired, use the large **FMS** Knob to select 'Auto' next to 'MFD Display'. Repeat steps 2 and 3 to adjust the MFD display backlighting.
- 5) To remove the menu, press the **CLR** or **MENU** Key.

Adjusting key backlighting:

- 1) Press the PFD **MENU** Key to display the 'PFD Setup Menu' Window. 'Auto' is now highlighted next to 'PFD Display'.
- 2) Turn the large **FMS** Knob to highlight 'PFD Display' or 'MFD Display', as desired.
- 3) Turn the small **FMS** Knob in the direction of the green arrowhead to display 'PFD Key' or 'MFD Key'.
- 4) Turn the large **FMS** Knob to highlight 'Auto'.
- 5) Turn the small **FMS** Knob to select 'Manual' and press the **ENT** Key. The intensity value is now highlighted.
- 6) Use the **FMS** Knob to enter the desired backlighting and press the **ENT** Key.
- 7) To remove the menu, press the **CLR** or **MENU** Key.



Figure 1-23 PFD Setup Menu

Blank Page

SECTION 2 FLIGHT INSTRUMENTS



NOTE: The Automatic Flight Control System (AFCS) provides additional bugs and indications on selected flight instruments. Refer to the AFCS Section for details on these features, as they appear on the display during certain AFCS flight director modes.

The system increases pilot situational awareness by providing an easy-to-scan Primary Flight Display (PFD) featuring a large horizon, airspeed, attitude, vertical speed, and course deviation information. In addition to the flight instruments, navigation, communication, terrain, traffic, and weather information are also presented on the PFD and are explained in other sections of this Pilot's Guide.

The following flight instruments and supplemental flight data are displayed on the PFD:

- Airspeed Indicator, showing
 - True Airspeed
 - Airspeed Awareness Ranges
 - Vspeed Reference Bugs
 - Trend Vector
- Attitude Indicator with Slip/Skid Indication
- Altimeter, showing
 - Barometric Setting
 - Selected Altitude
 - Trend Vector
- Vertical Deviation, Glideslope, and Glidepath Indicators
- Vertical Speed Indicator (VSI)
- Outside Air Temperature (OAT)
- International Standard Atmosphere (ISA) Deviation
- Horizontal Situation Indicator, showing
 - Turn Rate Indicator
 - Bearing Pointers and Information Windows
 - Course Deviation Indicator (CDI)
 - Navigation Source
 - DME Information Window (optional)
- ADF/DME Tuning Window (optional)
- System Time
- Wind Data
- Vertical Navigation (VNV) Indications
- Transponder Mode, Code, and Ident/Reply
- 'References' Window, showing
 - Generic Timer
 - Vspeed Values
 - Minimum Altitude Alerts

The PFD also displays various alerts and annunciations.



- | | |
|--|----------------------------------|
| ① NAV Frequency Box | ⑪ Turn Rate Indicator |
| ② Airspeed Indicator | ⑫ Barometric Altimeter Setting |
| ③ True Airspeed | ⑬ Vertical Speed Indicator (VSI) |
| ④ Current Heading | ⑭ Selected Altitude Bug |
| ⑤ Horizontal Situation Indicator (HSI) | ⑮ Altimeter |
| ⑥ Outside Air Temperature (OAT) | ⑯ Selected Altitude |
| ⑦ ISA Temperature Deviation | ⑰ Navigation Status Box |
| ⑧ Softkeys | ⑱ Slip/Skid Indicator |
| ⑨ System Time | ⑲ Attitude Indicator |
| ⑩ Heading Bug | |

Figure 2-1 Primary Flight Display (Default)

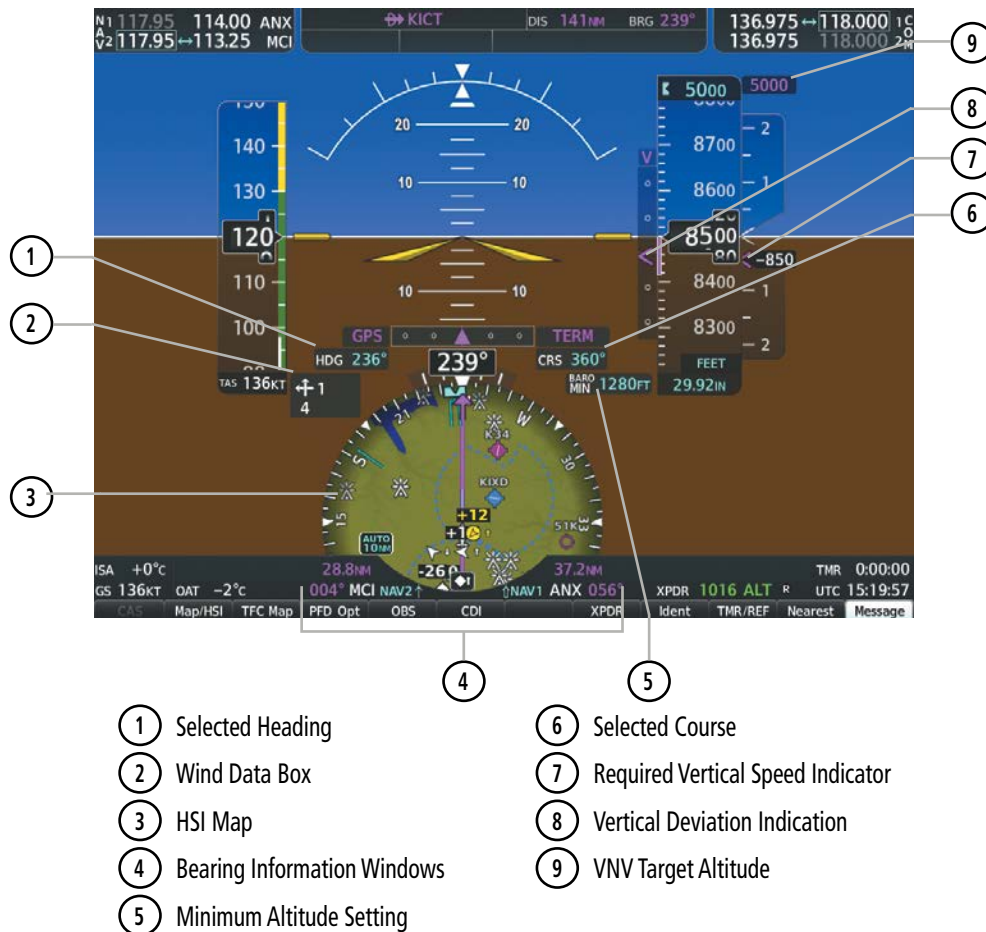


Figure 2-2 Primary Flight Display (Additional Information)

2.1 FLIGHT INSTRUMENTS

AIRSPEED INDICATOR



NOTE: Refer to the current pertinent flight manual for airspeed criteria and Vspeed values.

The Airspeed Indicator displays airspeed on a moving tape rolling number gauge. The true airspeed is displayed in knots below the Airspeed Indicator. The numeric labels and major tick marks on the moving tape are shown at intervals of 10 knots. The minor tick marks on the moving tape are marked at intervals of 5 knots. Speed indication starts at 20 knots, with 60 knots of airspeed viewable at any time. The indicated airspeed is displayed inside the black pointer. The pointer remains black until reaching never exceed speed (V_{NE}), at which point it appears red.

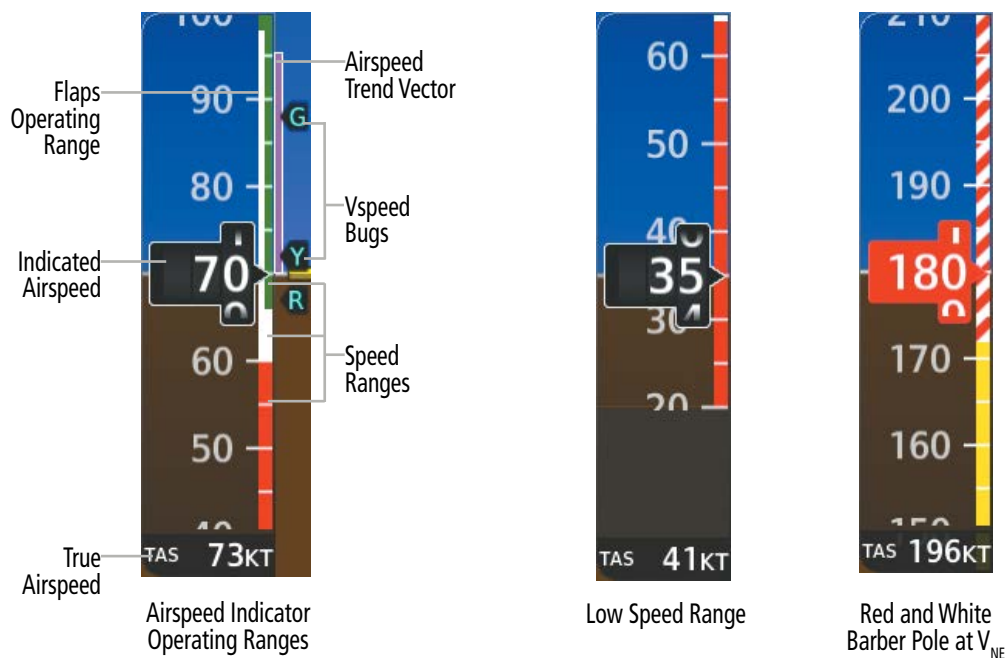


Figure 2-3 Airspeed Indicator Ranges

Color coded stripes appear on the Airspeed Indicator to show the operating ranges. The low speed range stripe is red. Normal operating range is green, caution range is amber, and the never exceed speed (V_{NE}) begins with a red and white barber pole. The flap operating range is indicated by a white stripe.


The Airspeed Trend Vector is a vertical magenta line that appears to the right of the color-coded speed range stripe when airspeed is either accelerating or decelerating. One end of the magenta line is anchored to the tip of the airspeed pointer while the other end moves continuously up or down corresponding to the rate of acceleration or deceleration. For any constant rate of acceleration or deceleration, the moving end of the line shows approximately what the indicated airspeed value will be in six seconds. If the trend vector crosses V_{NE} , the number in the indicated airspeed pointer changes to amber. The trend vector is absent if the speed remains constant or if any data needed to calculate airspeed is not available due to a system failure.

The pilot can modify and enable/disable the display of Vspeed Reference Bugs (Glide, V_R , V_X , and V_Y) from the 'References' Window. When enabled, the Vspeed Reference Bugs appear in their respective positions to the right of the airspeed scale. When the indicated airspeed is below 20 knots, enabled Vspeeds Reference Bugs and their numeric values appear in a list at the bottom of the airspeed tape, ordered from highest to lowest.


All Vspeed values are reset with each power cycle, but their On/Off status carries through power cycles.

Modifying Vspeeds and turning Vspeed Bugs On/Off:

- 1) Press the **TMR/REF** Softkey.
- 2) Turn the large **FMS** Knob to highlight the desired Vspeed.
- 3) Use the small **FMS** Knob to change the Vspeed in 1 knot increments (when a speed has been changed from a default value, an asterisk appears next to the speed).
- 4) Press the **ENT** Key or turn the large **FMS** Knob to highlight the 'On/Off' Field
- 5) Turn the small **FMS** Knob clockwise to 'On' or counterclockwise to 'Off'.
- 6) To remove the window, press the **CLR** Key or the **TMR/REF** Softkey.

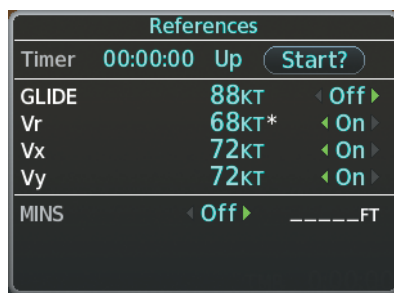

'References' Window

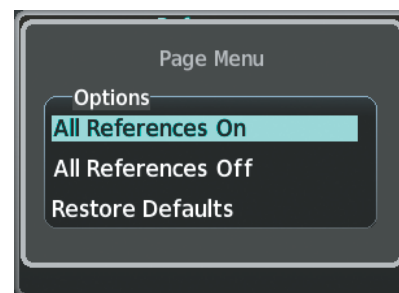

'References' Window Menu

Figure 2-4 'References' Window and Menu

Vspeed bugs can be enabled, disabled, and/or reset to default settings individually, or collectively.

Enabling/disabling or restoring all Vspeed bugs as a group:

- 1) Press the **TMR/REF** Softkey.
- 2) Press the **MENU** Key.
- 3) Turn the **FMS** Knob to highlight 'All References On', 'All References Off', or 'Restore Defaults', as desired.
- 4) Press the **ENT** Key.
- 5) To remove the window, press the **CLR** Key or the **TMR/REF** Softkey.

ATTITUDE INDICATOR

Attitude information is displayed over a virtual blue sky and brown ground with a white horizon line. The Attitude Indicator displays the pitch, roll, and slip/skid information.

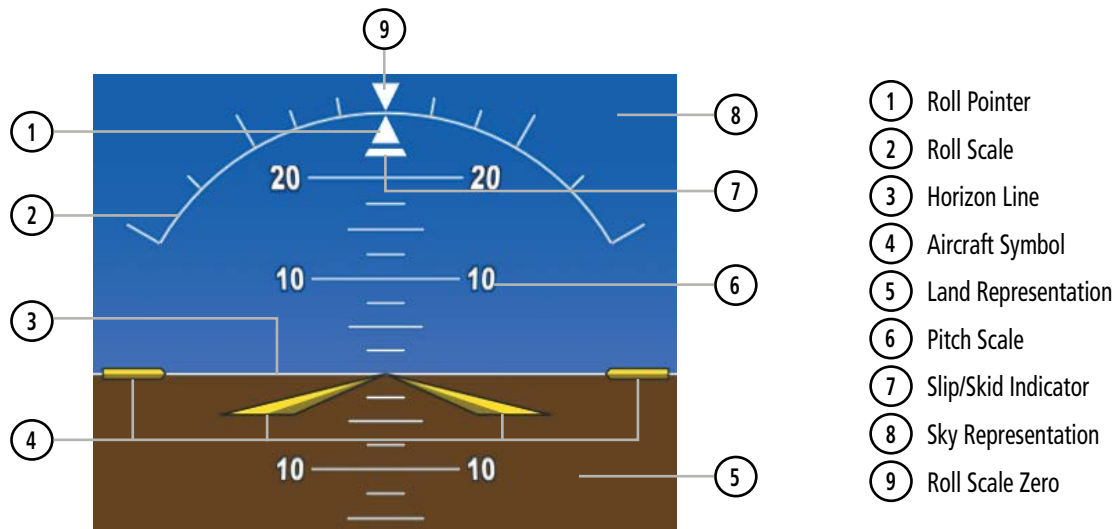


Figure 2-5 Attitude Indicator

The horizon line is part of the pitch scale. Above and below the horizon line, major pitch marks and numeric labels are shown for every 10°, up to 80°. Minor pitch marks are shown for intervening 5° increments, up to 25° below and 45° above the horizon line. Between 20° below to 20° above the horizon line, minor pitch marks occur every 2.5°. When the Synthetic Vision Technology (SVT) is activated, the pitch scale is reduced to 10° up and 7.5° down (refer to the Flight Instruments Section for information about Garmin SVT).

The inverted white triangle indicates zero on the roll scale. Major tick marks at 30° and 60° and minor tick marks at 10°, 20°, and 45° are shown to the left and right of the zero. Angle of bank is indicated by the position of the pointer on the roll scale.

The Slip/Skid Indicator is the bar beneath the roll pointer. The indicator bar moves with the roll pointer and moves laterally away from the pointer to indicate uncoordinated flight. Slip (inside the turn) or skid (outside the turn) is indicated by the location of the bar relative to the pointer.



Figure 2-6 Slip/Skid Indication

When the Garmin Electronic Stability and Protection (Garmin ESP™) system is available, additional indications may appear on the pitch and roll scales. Refer to the Additional Features and AFCS sections for more information about Garmin ESP and related indications.

ALTIMETER

INTRODUCTION

The Altimeter displays 600 feet or 200 meters of barometric altitude values at a time on a moving tape rolling number gauge. Numeric labels and major tick marks are shown at intervals of 100 feet or 50 meters. Minor tick marks are at intervals of 20 feet or 10 meters. The indicated altitude is displayed inside the black pointer.

A magenta Altitude Trend Vector extends up or down the left of the altitude tape, the end resting at the approximate altitude to be reached in six seconds at the current vertical speed. The trend vector is not shown if altitude remains constant or if data needed for calculation is not available due to a system failure.

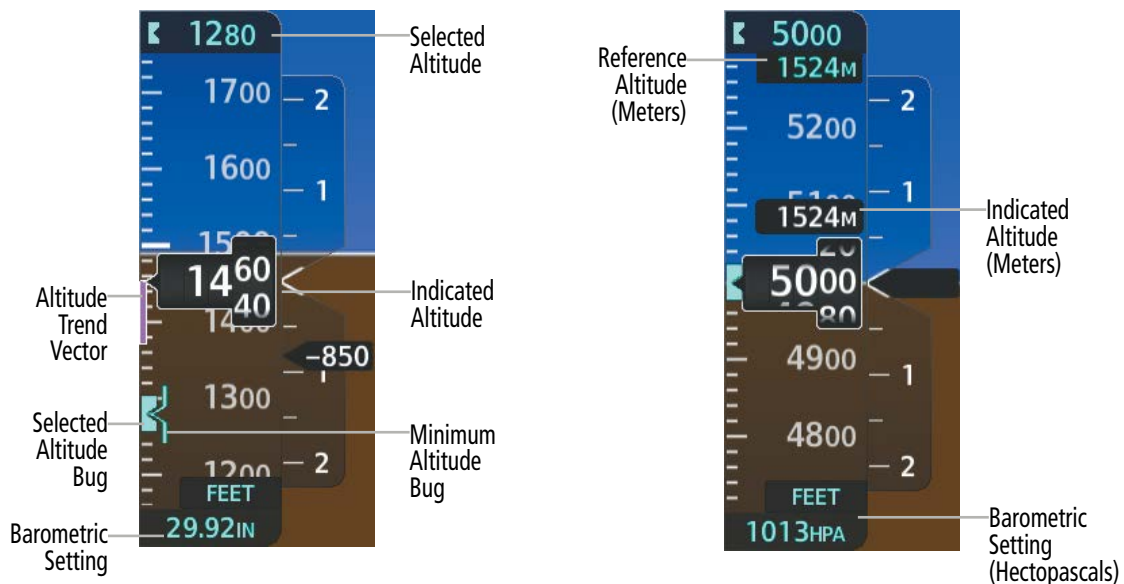


Figure 2-7 Altimeter

BAROMETRIC SETTING

The barometric pressure setting is displayed below the Altimeter in inches of mercury (in Hg), or hectopascals (hPa) when metric units are selected. Adjusting the altimeter barometric pressure setting creates discontinuities in VNV vertical deviation, moving the descent path. For large adjustments, it may take several minutes for the aircraft to re-establish on the descent path. If the change is made while nearing a waypoint with a VNV target altitude, the aircraft may not re-establish on the descent path in time to meet the vertical constraint.

Selecting the altimeter barometric pressure setting:

Turn the **BARO** Knob to select the desired setting.

Selecting standard barometric pressure (29.92 in Hg):

- 1) Press the **PFD Opt** Softkey to display the second-level softkeys.
- 2) Press the **STD Baro** Softkey.
- 3) Press the **Back** Softkey to return to the top-level softkeys.

STD BARO

Figure 2-8 Standard Barometric Altimeter Setting

Changing altimeter barometric pressure setting units:

- 1) Press the **PFD Opt** Softkey to display the second-level softkeys.
- 2) Press the **ALT Units** Softkey.
- 3) Press the **IN** Softkey to display the barometric pressure setting in inches of mercury (in Hg), or press the **HPA** Softkey to display the barometric pressure setting in hectopascals (hPa).
- 4) Press the **Back** Softkey twice to return to the top-level softkeys.



WARNING: Do not use a QFE altimeter setting with this system. System functions will not operate properly with a QFE altimeter setting. Use only a QHN altimeter setting for the height above mean sea level, or the standard pressure setting, as applicable.

SELECTED ALTITUDE

The Selected Altitude is displayed above the Altimeter in the box indicated by a selection bug symbol. A bug corresponding to this altitude is shown on the tape. If the Selected Altitude exceeds the range shown on the tape, the bug appears at the upper or lower edge of the tape. When the metric value is selected, it is displayed in a separate box below the Selected Altitude.

The **ALT** Knob has a stop-altitude feature that is related to vertical navigation altitudes in the flight plan. While turning the **ALT** Knob, the Selected Altitude can stop at intermediate values corresponding to vertical navigation altitudes. Stop-altitudes include valid VNV constraints which include all auto-designated, manually entered, and published VNV constraints. When temperature compensation is applied to a stop-altitude waypoint, the Selected Altitude will stop at the temperature corrected altitude. Refer to the Flight Management Section for a discussion on both VNV constraints and temperature compensation, and see the AFCS Section for more information about the Selected Altitude.

Setting the Selected Altitude:

Turn the **ALT** Knob to set the Selected Altitude. Turn the large knob for 1000-ft increments or the small knob for 100-ft increments. If set to metric units, the large and small knobs adjust the Selected Altitude in 50-meter increments. When the unit overlay function is enabled, the Selected Altitude will stop at both the standard increments and the metric increments.

If a Minimum Altitude value has been set, this altitude is also available for the Selected Altitude while turning the **ALT** Knob.

UNITS OVERLAY

The system is set to display feet by default. However, the pilot can choose to display a meters overlay for the indicated altitude and Selected Altitude.

Enabling altitude units overlay:

- 1) Press the **PFD Opt** Softkey to display the second-level softkeys.
- 2) Press the **ALT Units** Softkey.
- 3) Press the **Meters** Softkey to enable/disable the meters overlay.
- 4) Press the **Back** Softkey twice to return to the top-level softkeys.

VERTICAL SPEED INDICATOR (VSI)

The Vertical Speed Indicator (VSI) displays the aircraft vertical speed on a fixed scale with labels at 2000 and 4000 fpm and minor tick marks every 1000 fpm. Digits appear in the pointer when the climb or descent rate is greater than 100 fpm. If the rate of ascent/descent exceeds 2000 fpm, the pointer appears at the edge of the tape and the rate appears inside the pointer. If the VSI is set to display meters, the major tickmarks are 5 and 10 mps with minor tickmarks every 2.5 mps.

A magenta chevron is displayed on the VSI to indicate the Required Vertical Speed for reaching a VNV Target Altitude once the 'TOD [Top of Descent] within 1 minute' alert has generated. See the Flight Management Section for details on VNV features and refer to this section for more information about VNV indications on the PFD.

VERTICAL DEVIATION INDICATOR (VDI)

When vertical navigation is being used, the Vertical Deviation Indicator (VDI) appears to the left of the Altimeter and is displayed with a magenta 'V' at the top of the scale and a magenta chevron indicating the VNV vertical deviation. The VDI appears in conjunction with the 'TOD within 1 minute' alert. The VDI is removed from the display if vertical deviation becomes invalid. See the Flight Management Section for details on VNV features, and refer to this section for more information on VNV indications.

The Glideslope Indicator appears to the left of the Altimeter whenever an ILS frequency is tuned in the active NAV field. A green diamond acts as the Glideslope Indicator, like a glideslope needle on a conventional indicator. If a localizer frequency is tuned and there is no glideslope, 'NO GS' is displayed in place of the diamond.

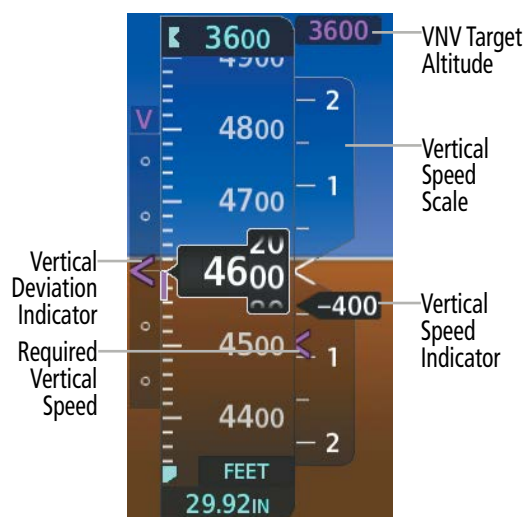


Figure 2-9 Vertical Speed and Deviation Indicators (VSI and VDI)

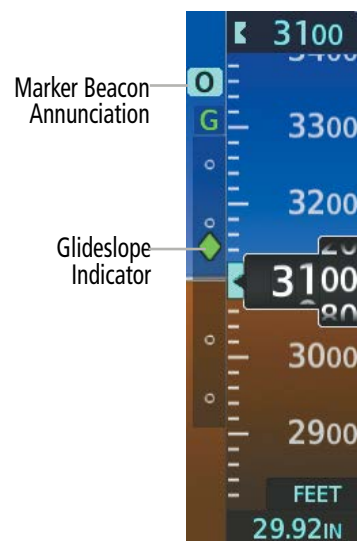


Figure 2-10 Glideslope Indicator



NOTE: The Glidepath Indicator is only available on GPS approaches supporting SBAS vertical guidance when SBAS is available.



NOTE: The Glidepath Indicator appears on the display as soon as the FAF becomes the active waypoint. Depending on procedure design, pilot action, and/or ATC clearance, the aircraft may be centered on or above the glidepath when the Glidepath Indicator appears.



NOTE: When the temperature is warmer than a standard day, the system-generated glidepath guidance for a non-precision approach may cross below the FAF minimum altitude restriction.

The Glidepath Indicator is a vertical deviation scale for GPS approaches supporting SBAS vertical guidance or advisory vertical guidance. The Glidepath Indicator, a magenta diamond, appears on the PFD as soon as the FAF becomes the active waypoint and GPS is the selected navigation source. Full-scale deflection (two dots), is angular with upper and lower limits. The upper limit is ± 492 feet (150 meters) and lower limits depend on approach service level.

- LNAV/VNAV, LNAV+V, LP+V is ± 148 feet (45 meters)
- LPV is ± 49 feet (15 meters)

If the approach type downgrades past the FAF, 'NO GP' is displayed in place of the diamond.

While executing an LNAV/VNAV approach, and between the FAF and MAP, the Vertical Deviation Limit Indicator appears as vertical white lines, indicating the area where deviation exceeds allowable limits for the glidepath. The Vertical Deviation Limit Indicator provides a scaled representation of ± 75 feet of the calculated glidepath. The "window" between the lines represents the area of acceptable deviation. The length of the lines will change while progressing through the final approach, but the area between the lines will still represent ± 75 feet. When the Glidepath Indicator enters an excessive deviation area, the Glidepath Indicator and Vertical Deviation Limit Indicator become amber.




Figure 2-11 Glidepath Indicator




Figure 2-12 Glidepath Indicator and Vertical Deviation Limit Indicator

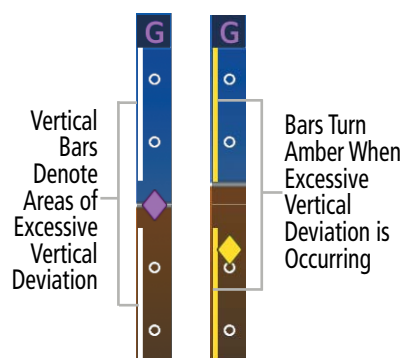


Figure 2-13 Glidepath with Excessive Vertical Deviation

VERTICAL NAVIGATION (VNV) INDICATIONS

When a VNV flight plan has been activated, VNV indications (VNV Target Altitude, RVSI, VDI) appear on the PFD in conjunction with the 'TOD within 1 minute' message and "vertical track" voice alert. See the Flight Management and AFCS sections for details on VNV features. VNV indications are removed from the PFD according to the criteria listed in the table.



Figure 2-14 Vertical Navigation Indications (PFD)

Criteria	VNV Indication Removed		
	Required Vertical Speed (RVSI)	Vertical Deviation (VDI)	VNV Target Altitude
Aircraft > 1 min before the next TOD due to flight plan change	X	X	X
VNV cancelled (Cncl VNV Softkey pressed on MFD)	X	X	X
Distance to active waypoint cannot be computed due to unsupported flight plan leg type (see Flight Management Section)	X	X	X
Aircraft > 250 feet below active VNV Target Altitude	X	X	X
Current crosstrack or track angle error has exceeded limit	X	X	X
Active altitude-constrained waypoint cannot be reached within maximum allowed flight path angle and vertical speed	X	X	
Last altitude-constrained waypoint in active flight plan reached	X	X (30 sec before)	X

Table 2-1 VNV Indication Removal Criteria

HORIZONTAL SITUATION INDICATOR (HSI)

The Horizontal Situation Indicator (HSI) displays a rotating compass card in a heading-up orientation. Letters indicate the cardinal points with numeric labels every 30°. Major tick marks are at 10° intervals and minor tick marks are at 5° intervals. A digital reading of the current heading appears on top of the HSI. The current over the ground track the aircraft is flying is represented on the HSI by a magenta diamond, called the Current Track Indicator. The HSI also presents turn rate, course deviation, bearing, and navigation source information. The

HSI is available as a traditional 360° compass rose and a 210° HSI Map. The HSI Map offers two pilot-selectable map formats: a navigation map or traffic map. The HSI Map and Inset Map cannot be displayed simultaneously.

The traditional (360°) HSI contains a Course Deviation Indicator (CDI) with a Course Pointer, To/From Indicator, sliding Deviation Bar and deviation scale. The Course Pointer is a single line arrow (GPS, VOR1, and LOC1) or a double line arrow (VOR2 and LOC2), which points in the direction of the set course. The To/From Indicator rotates with the Course Pointer and appears when the system is receiving valid NAVAID data.

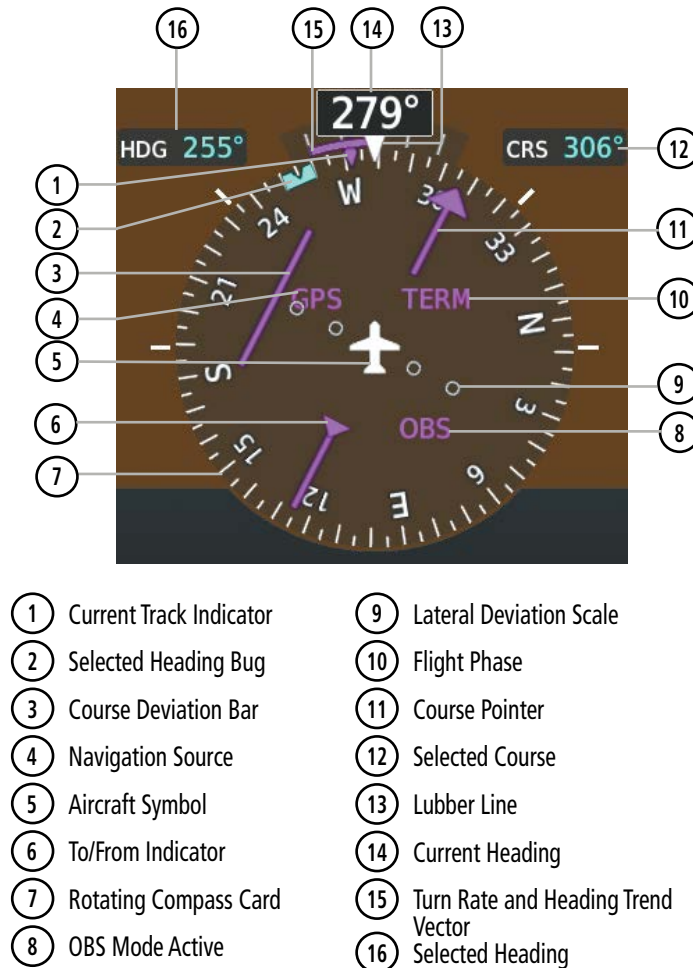


Figure 2-15 Horizontal Situation Indicator (360° HSI)

The HSI Map is a 210° expanded compass rose which also includes a navigation map with overlay capabilities such as topographical, weather, traffic, and land information. The HSI Map contains a Course Pointer, a combined To/From Indicator with a sliding deviation indicator, and a lateral deviation scale. Upon passing a station, the To/From Indicator points to the tail of the aircraft. Depending on the navigation source, the CDI on the HSI Map can appear either as an arrowhead (GPS, VOR, OBS) or as a diamond (LOC). Refer to the Flight Management Section for information about using HSI Map overlays.

When the pilot enables the HSI Map, the HSI is formatted to show a navigation map on the rotating compass card. The following information appears above the current heading when the HSI Map is enabled:

- ## SYSTEM OVERVIEW

- ## FLIGHT INSTRUMENTS

- EIS

- ## AUDIO & CNS

- ## FLIGHT MANAGEMENT


- ## HAZARD AVOIDANCE

- AFCS**


- ## ADDITIONAL FEATURES

- ## APPENDICES

- INDEX



Upon station passage, the To/From Indicator flips and points to the tail of the aircraft, just like a conventional to/from flag.

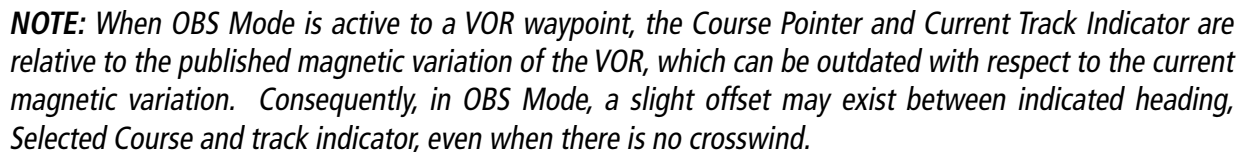

Turn the **HDG** Knob to set the Selected Heading.

Push the **HDG** Knob to synchronize the bug to the current heading.

Turn the **CRS** Knob to set the Selected Course.

Push the **CRS** Knob to re-center the CDI and return the Course Pointer to the bearing of the active waypoint or navigation station.



Figure 2-17 Heading and Course Indications

Navigation angles (track, heading, course, bearing) are corrected to the computed magnetic variation (Mag Var) or referenced to true north ($^{\circ}\text{T}$), set on the 'Aux – System Setup 1' Page. When an approach referenced to true north has been loaded into the flight plan, the system generates a message to change the navigation angle setting to True at the appropriate time.

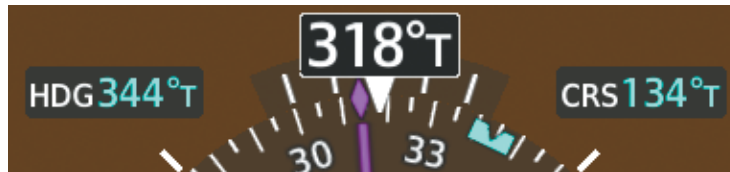


Figure 2-18 Heading and Course Indications (True)

Changing the navigation angle true/magnetic setting:

- 1) Use the **FMS** Knob (and press the **Setup 1** Softkey, if necessary) to select the 'Aux – System Setup 1' Page.
- 2) Push the **FMS** Knob to activate the cursor.
- 3) Turn the large **FMS** Knob to highlight the 'NAV Angle' Field in the 'Display Units' Box.
- 4) Turn the small **FMS** Knob to highlight the desired setting and press the **ENT** Key:
 - 'True($^{\circ}\text{T}$)' – References angles to true north.
 - 'Magnetic($^{\circ}$)' – Angles corrected to the computed magnetic variation (Mag Var).

TURN RATE INDICATOR

The Turn Rate Indicator is located directly above the rotating compass card. Tick marks to the left and right of the lubber line denote half-standard and standard turn rates. A magenta Turn Rate Trend Vector shows the current turn rate. The end of the trend vector gives the heading predicted in six seconds, based on the present turn rate. A standard-rate turn is shown on the indicator by the trend vector stopping at the standard turn rate tick mark, corresponding to a predicted heading of 18° from the current heading. At rates greater than 4 deg/sec, an arrowhead appears at the end of the magenta trend vector and the prediction is no longer valid.



Figure 2-19 Turn Rate Indicator and Trend Vector

BEARING POINTERS AND INFORMATION WINDOWS

Two bearing pointers and associated information can be displayed on the HSI for NAV and GPS sources by pressing the **PFD Opt** Softkey then either the **Bearing 1** or **Bearing 2** Softkey. The bearing pointers are cyan and are single-line (Bearing 1) or double-line (Bearing 2). A pointer symbol is shown in the information window to indicate the navigation source. The bearing pointers never override the CDI and are visually separated from the CDI by a white ring, except when the HSI Map is enabled. Bearing pointers may be selected but not necessarily visible due to data unavailability.

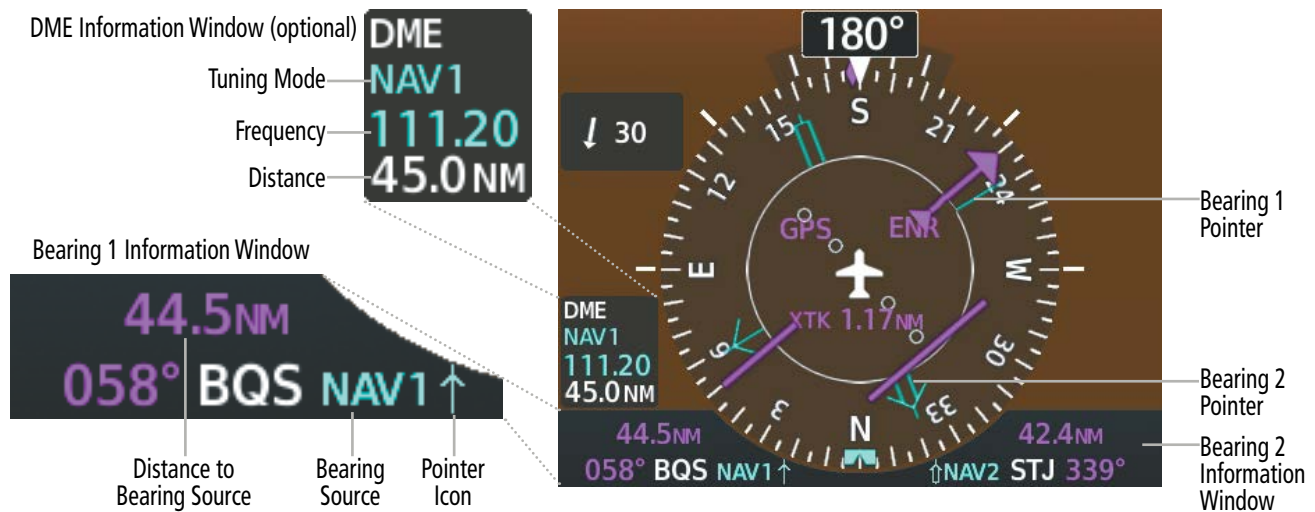


Figure 2-20 HSI with Bearing Information Windows

When a bearing pointer is displayed, the associated information window is also displayed. The bearing information windows are displayed at the lower sides of the HSI and give the following information:

- » Bearing Source (NAV, GPS, ADF)
- » Pointer Icon (Bearing 1 = Single Line, Bearing 2 = Double Line)
- » Frequency (NAV, ADF)
- » Station/Waypoint Identifier (NAV, GPS)
- » GPS-Derived Great Circle Distance to Bearing Source

When the NAV radio is tuned to an ILS frequency, the bearing source and the bearing pointer are removed from the HSI and replaced with 'ILS'. When NAV1 or NAV2 is the selected bearing source, the frequency is replaced by the station identifier when the station is within range. If GPS is the bearing source, the active waypoint identifier is displayed instead of a frequency.

The bearing pointer is removed from the HSI and dashes are displayed in the information window if the NAV radio is not receiving a VOR station or if GPS is the bearing source and an active waypoint is not selected.

Selecting bearing display and changing sources:

- 1) Press the **PFD Opt** Softkey.
- 2) Press either the **Bearing 1** or **Bearing 2** Softkey to display the desired bearing pointer and information window with NAV1.
- 3) Press either the **Bearing 1** or **Bearing 2** Softkey again to change the bearing source to NAV2.

- 4) Press either the **Bearing 1** or **Bearing 2** Softkey a third time to change the bearing source to GPS.
- 5) Press either the **Bearing 1** or **Bearing 2** Softkey a fourth time to change the bearing source to ADF (optional).
- 6) To remove the bearing pointer and information window, press either the **Bearing 1** or **Bearing 2** Softkey again.

DME INFORMATION WINDOW



NOTE: DME radio installation is optional.

The DME Information Window is displayed above the Bearing 1 Information Window and shows the DME label, tuning mode (NAV1, NAV2, or HOLD), frequency, and distance. When a signal is invalid, the distance is replaced by '— — NM'. Refer to the Audio and CNS Section for information on tuning radios.

Displaying the DME Information Window:

- 1) Press the **PFD Opt** Softkey.
- 2) Press the **DME** Softkey to display the DME Information Window above the Bearing 1 Information Window.
- 3) To remove the DME Information Window, press the **DME** Softkey again.

COURSE DEVIATION INDICATOR (CDI)

The Course Deviation Indicator (CDI) Deviation Bar moves left or right from the Course Pointer along a lateral deviation scale to display aircraft position relative to the course. If the course deviation data is not valid, the CDI is not displayed.



Figure 2-21 Course Deviation Indicator (CDI)

The CDI can display two sources of navigation, GPS or VOR/LOC. Color indicates the current navigation source, magenta for GPS and green for VOR and LOC. The full scale limits for the CDI are defined by a GPS-derived distance when coupled to GPS. When navigating using a VOR or localizer (LOC), the CDI uses the same angular limits as a mechanical CDI. If the CDI exceeds the maximum deviation on the scale (two dots) while navigating with GPS, the crosstrack error (XTK) is displayed below the white aircraft symbol.



Figure 2-22 Navigation Sources

Changing navigation sources:

- 1) Press the **CDI** Softkey to change from GPS to VOR1 or LOC1. This places the cyan tuning box over the NAV1 standby frequency in the upper left corner of the PFD.
- 2) Press the **CDI** Softkey again to change from VOR1 or LOC1 to VOR2 or LOC2. This places the cyan tuning box over the NAV2 standby frequency.
- 3) Press the **CDI** Softkey a third time to return to GPS.

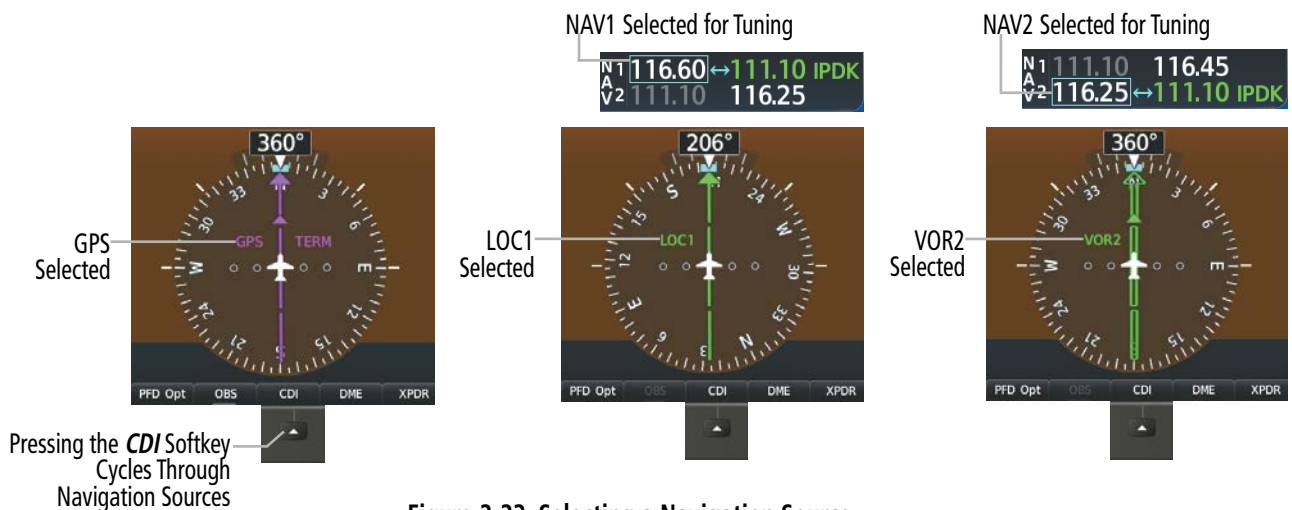


Figure 2-23 Selecting a Navigation Source

The system automatically changes from GPS to LOC navigation source and changes the CDI scaling accordingly when all of the following occur:

- A localizer or ILS approach has been loaded into the active flight plan
- The FAF is the active leg, the FAF is less than 15 nm away, and the aircraft is moving toward the FAF
- A valid localizer frequency has been tuned
- The GPS CDI deviation is less than 1.2 times full-scale deflection

GPS steering guidance is still provided after the CDI automatically changes to LOC until LOC capture, up to the FAF for an ILS approach, or until GPS information becomes invalid. Activating a Vector-to-Final (VTF) also causes the CDI to switch to LOC navigation source. GPS steering guidance is not provided after the change.

On some ILS approaches, where the glideslope intercept point is at or in close proximity to the fix prior to the FAF, it is possible to be above the glideslope when the navigation source automatically changes from GPS to LOC. The probability of this occurring varies based on air temperature.

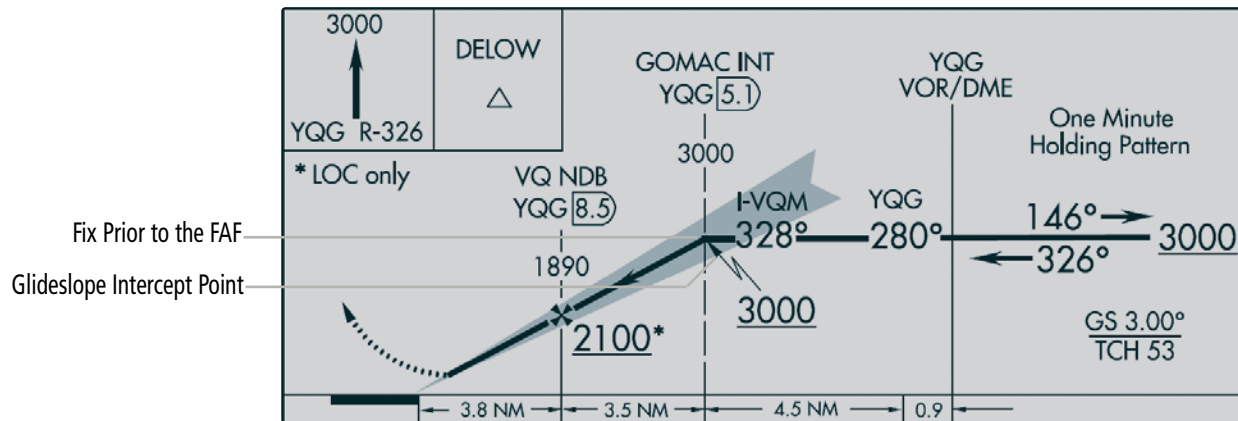


Figure 2-24 ILS Approach with Glideslope Intercept Point at Fix Prior to the FAF

GPS CDI SCALING

When GPS is the selected navigation source, the flight plan legs are sequenced automatically and annunciations appear on the HSI for the flight phase. Flight phase annunciations are normally shown in magenta, but when cautionary conditions exist the color changes to amber. If the current leg in the flight plan is a heading leg, 'HDG LEG' is annunciated in magenta beneath the aircraft symbol.

The current GPS CDI scale setting is displayed in the 'System CDI' Field of the 'GPS CDI' Box on the 'Aux – System Setup 1' Page. The full-scale deflection setting may also be changed (2.00NM, 1.00NM, 0.30NM, or Auto) from this page. If the selected scaling is smaller than the automatic setting for enroute and terminal phases, the CDI is scaled accordingly and the selected setting is displayed rather than the flight phase annunciation.

Changing the selected GPS CDI setting:

- 1) Use the **FMS** Knob (and press the **Setup 1** Softkey, if necessary) to select the 'Aux – System Setup 1' Page.
- 2) Push the **FMS** Knob to activate the cursor.
- 3) Turn the large **FMS** Knob to highlight the 'Format Allowed' Field in the 'GPS CDI' Box.
- 4) Turn the small **FMS** Knob to highlight the desired setting and press the **ENT** Key.
- 5) To cancel the selection press the **CLR** Key, or push the **FMS** Knob to deactivate the cursor.

When set to 'Auto' (default), the GPS CDI scale automatically adjusts to the desired limits based upon the current phase of flight, as follows:

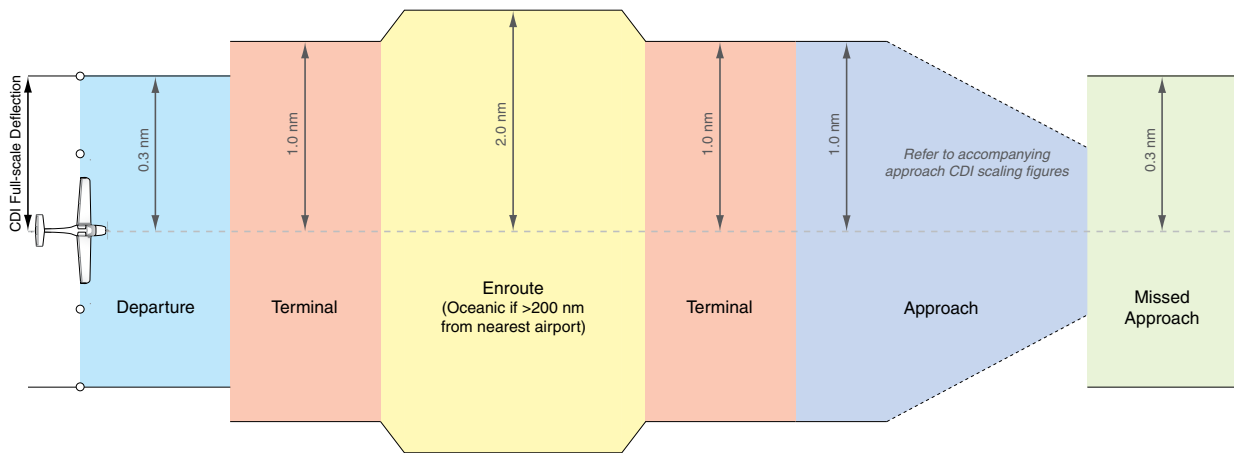


Figure 2-25 Automatic CDI Scaling

- » Once a departure procedure is activated, the CDI is scaled for *departure* (0.3 nm).
- » The system switches from departure to *terminal* CDI scaling (1.0 nm) when transitioning to the next leg ending at a waypoint or when transitioning to a leg that is not aligned with the runway.
- » At 30 nm from the departure airport, the *enroute* phase of flight is automatically entered and CDI scaling changes to 2.0 nm over a distance of 1.0 nm, except under the following conditions:
 - When navigating with an active departure procedure, the flight phase and CDI scale does not change until the aircraft arrives at the last departure waypoint (if more than 30 nm from the departure airport) or the leg after the last departure waypoint has been activated or a direct-to waypoint is activated.
- » If after completing the departure procedure, the nearest airport is more than 200 nm away from the aircraft and the approach procedure has not yet commenced, the CDI is scaled for *oceanic* flight (4.0 nm).
- » Within 31 nm of the destination airport (*terminal* area), the CDI scale gradually ramps down from 2.0 nm to 1.0 nm over a distance of 1.0 nm, except under the following conditions:
 - Upon reaching the first waypoint of an arrival route that is more than 31 nm from the destination airport, the flight phase changes to terminal and the CDI scale begins to transition down from 2.0 nm to 1.0 nm over a distance of 1.0 nm.
- » During *approach*, the CDI scale ramps down even further (see following figures). This transition normally occurs within 2.0 nm of the FAF. The CDI switches to approach scaling automatically once the approach procedure is activated or if VTF is selected.
 - If the active waypoint is the FAF, the ground track and the bearing to the FAF must be within 45° of the final approach segment course.
 - If the active waypoint is part of the missed approach procedure, the active leg and the preceding missed approach legs must be aligned with the final approach segment course and the aircraft must not have passed the turn initiation point.

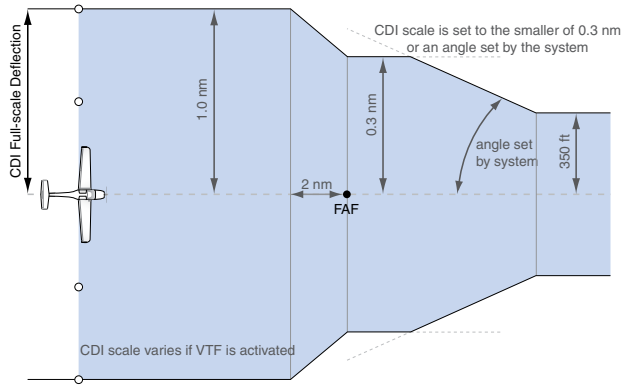


Figure 2-26 Typical LNAV and LNAV+V Approach Service Level CDI Scaling

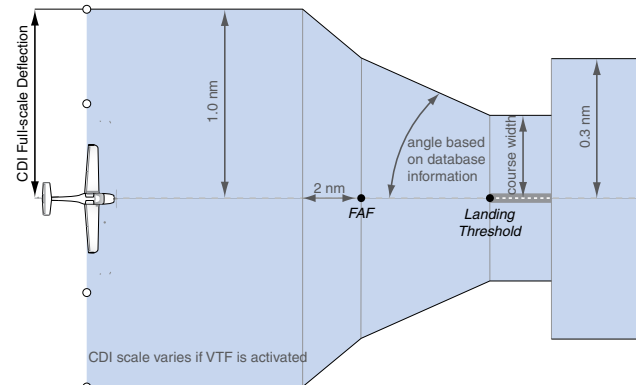


Figure 2-27 Typical LNAV/VNAV, LPV, LP, and LP+V Approach Service Level CDI Scaling

- » When a *missed approach* is activated, the CDI scale changes to 0.3 nm.
- » The system automatically switches back to *terminal* CDI scaling (1.0 nm) when transitioning to the next leg ending at a waypoint or when transitioning to a leg that is not aligned with the runway.

Flight Phase	Annunciation ¹	Automatic CDI Full-scale Deflection
Departure	DPRT	0.3 nm
Terminal	TERM	1.0 nm
Enroute	ENR	2.0 nm
Oceanic	OCN	4.0 nm
Approach- (Non-precision)	LNAV	1.0 nm decreasing to 350 feet, depending on variables.
Approach (Non-precision with Advisory Vertical Guidance)	LNAV + V	
Approach (LNAV/VNAV)	L/VNAV	1.0 nm decreasing to a specified course width, then 0.3 nm, depending on variables.
Approach (LP)	LP	
Approach (LP+V)	LP+V	
Approach (LPV)	LPV	
Missed Approach	MAPR	0.3 nm

¹ Flight phase annunciations are normally shown in magenta, but when cautionary conditions exist the color changes to amber.

Table 2-2 Automatic GPS CDI Scaling

OBS MODE



NOTE: VNV is inhibited while automatic waypoint sequencing has been suspended.

Enabling Omni-bearing Selector (OBS) Mode suspends the automatic sequencing of waypoints in a GPS flight plan (GPS must be the selected navigation source), but retains the current “active-to” waypoint as the navigation reference even after passing the waypoint. ‘OBS’ is annunciated to the lower right of the aircraft symbol when OBS Mode is selected on the HSI, or to the upper right of the HSI Map.

While OBS Mode is enabled, a course line is drawn through the active-to waypoint on the moving map. If desired, the course to/from the waypoint can now be adjusted. When OBS Mode is disabled, the flight plan returns to normal operation with automatic sequencing of waypoints, following the course set in OBS Mode. The flight path on the moving map retains the modified course line.

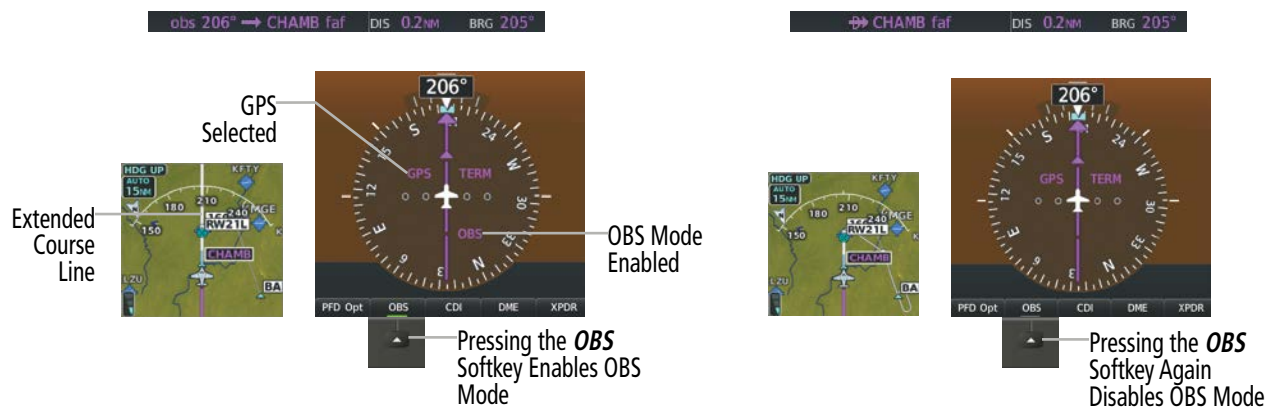


Figure 2-28 Omni-bearing Selector (OBS) Mode

Enabling/disabling OBS Mode while navigating a GPS flight plan:

- 1) Press the **OBS** Softkey to select OBS Mode.
- 2) Turn the **CRS** Knob to select the desired course to/from the waypoint. Push the **CRS** Knob to synchronize the Selected Course with the bearing to the next waypoint.
- 3) Press the **OBS** Softkey again to return to automatic waypoint sequencing.

As the aircraft crosses the MAP, automatic approach waypoint sequencing is suspended. ‘SUSP’ appears on the HSI at the lower right of the aircraft symbol. The **OBS** Softkey label changes to a **SUSP** Softkey label to indicate the suspension is active. Pressing the **SUSP** Softkey deactivates the suspension and resumes automatic sequencing of approach waypoints.

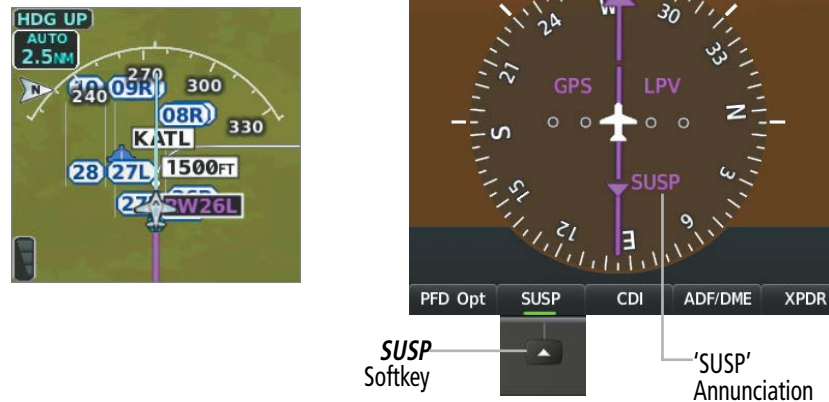


Figure 2-29 Suspending Automatic Waypoint Sequencing

2.2 SUPPLEMENTAL FLIGHT DATA

In addition to the flight instruments, the PFDs also display various supplemental information, including a generic timer, temperatures, and wind data.

GENERIC TIMER

The generic timer can be accessed via softkeys on the PFD. It provides quick access for timing functions. The generic timer can be set to count up or down from a specified time (HH:MM:SS). When the countdown on the timer reaches zero, the digits begin to count up from zero. If the timer is reset before reaching zero on a countdown, the digits are reset to the initial value. If the timer is counting up when reset, the digits are zeroed.

Setting the generic timer (PFD):

- 1) Press the **TMR/REF** Softkey. This opens the 'References' Window.
- 2) Turn the large **FMS** Knob to select the 'Timer' Field (HH:MM:SS).
- 3) Use the **FMS** Knob to enter the desired time.
- 4) Press the **ENT** Key. The 'Up/Dn' Field is now highlighted.
- 5) Turn the small **FMS** Knob to display the 'Up/Dn' Window.
- 6) Turn the small **FMS** Knob to select 'Up' or 'Dn'.
- 7) Press the **ENT** Key. 'Start?' is now highlighted.
- 8) Press the **ENT** Key to start the timer. The field changes to 'Stop?'. If the timer is counting down, it will start counting up after reaching zero.
- 9) To stop the timer, press the **ENT** Key with 'Stop?' highlighted. The field changes to 'Reset?'.
- 10) To reset the timer, press the **ENT** Key with 'Reset?' highlighted. The field changes back to 'Start?' and the digits are reset to 00:00:00.
- 11) To remove the window, press the **CLR** Key or the **TMR/REF** Softkey.

TEMPERATURE DISPLAYS

The Outside Air Temperature (OAT) and deviation from International Standard Atmosphere (ISA) temperature are displayed in the lower left corner of the PFD under normal conditions. Both are displayed in either degrees Celsius (°C) or Fahrenheit (°F), depending on the temperature units selected on the 'Aux – System Setup 1' Page.

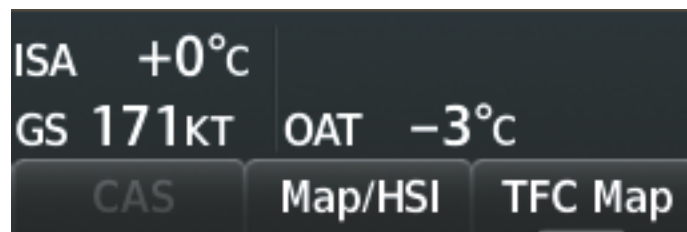


Figure 2-30 ISA and OAT Displayed on PFD



NOTE: ISA is removed from view if the display enters Reversionary Mode.

Changing temperature display units:

- 1) Use the **FMS** Knob (and press the **Setup 1** Softkey, if necessary) to select the 'Aux – System Setup 1' Page.
- 2) Push the **FMS** Knob to activate the cursor.
- 3) Turn the large **FMS** Knob to highlight the 'Temperature' Field in the 'Display Units' Box.
- 4) Turn the small **FMS** Knob to highlight either 'Celsius(°C)' or 'Fahrenheit(°F)' and press the **ENT** Key to confirm the selection.
- 5) To cancel the selection press the **CLR** Key, or push the **FMS** Knob to deactivate the cursor.

WIND DATA

Wind direction and speed in knots can be displayed relative to the aircraft in a window to the upper left of the HSI. When the window is selected for display, but wind information is invalid or unavailable, the window displays 'NO WIND DATA'. Wind data can be displayed in three different ways.

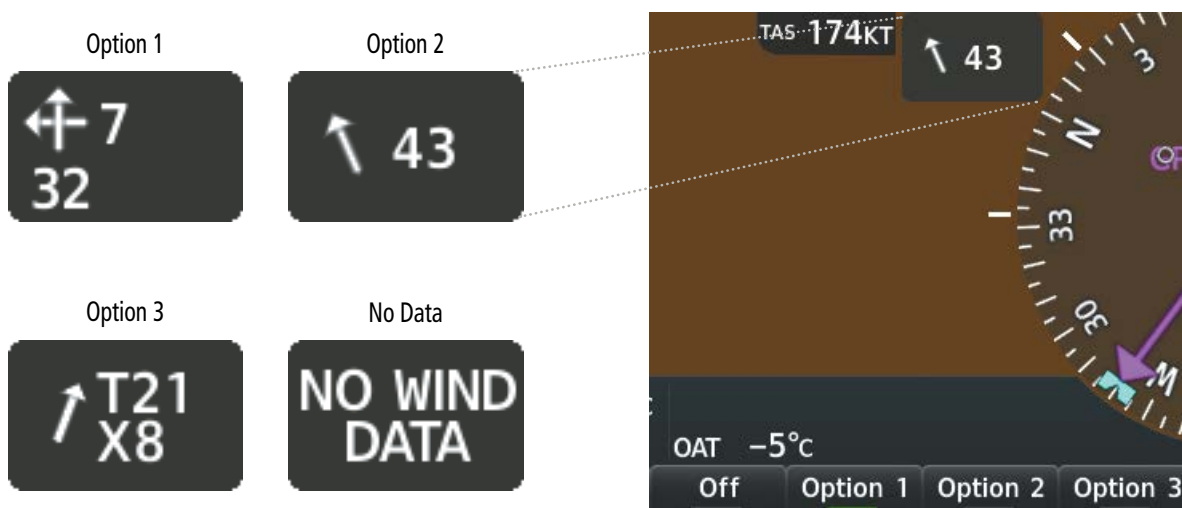


Figure 2-31 Wind Data

Displaying wind data:

- 1) Press the **PFD Opt** Softkey.
- 2) Press the **Wind** Softkey to display wind data option softkeys.
- 3) Press one of the option softkeys to change how wind data is displayed to the left of the HSI:
 - **Option 1:** Headwind/tailwind and crosswind arrows with numeric speed components
 - **Option 2:** Total wind direction arrow with numeric speed
 - **Option 3:** Total wind direction arrow with numeric headwind/tailwind (H/T) and crosswind (X) components
- 4) To remove the window, press the **Off** Softkey.

2.3 GARMIN SYNTHETIC VISION TECHNOLOGY (SVT)



WARNING: Use appropriate primary systems for navigation, and for terrain, obstacle, and traffic avoidance. Garmin SVT is intended as an aid to situational awareness only and may not provide either the accuracy or reliability upon which to solely base decisions and/or plan maneuvers to avoid terrain, obstacles, or traffic.



NOTE: Terrain data is not displayed when the aircraft is outside the installed terrain database coverage area.



NOTE: Terrain and obstacle alerting is not available north of 89° North latitude and south of 89° South latitude. This is due to limitations present within the terrain database and the system's ability to process the data representing the affected areas.

Garmin SVT™ (Synthetic Vision Technology) is an optional visual enhancement to the system. SVT depicts a forward-looking attitude display of the topography immediately in front of the aircraft. SVT information is shown on the PFD or MFD in Reversionary Mode. The depicted imagery is derived from the aircraft attitude, heading, GPS three-dimensional position, and a 4.9 arc-second database of terrain, obstacles, and other relevant features. The terrain data resolution of 4.9 arc-seconds means the terrain elevation contours are stored in squares measuring 4.9 arc-seconds on each side. Loss of any of the required data, including temporary loss of the GPS signal, will cause SVT to be disabled (although the softkeys will still appear functional) until the required data is restored.

The SVT terrain display shows land contours (colors are consistent with those of the topographical map display), large water features, towers, and other obstacles over 200' AGL that are included in the obstacle database. Wire obstacles, such as high voltage transmission lines, may also be shown when present in the database. Cultural features on the ground such as roads, highways, railroad tracks, cities, and state boundaries are not displayed, even if those features are found on navigation maps. The terrain display also includes a north–south east–west grid, with lines oriented to true north and spaced at one arc-minute intervals to assist in orientation relative to the terrain.

Forward-looking terrain and obstacle alerting is integrated within SVT to provide visual and auditory alerts to indicate the presence of terrain and obstacle threats relevant to the projected flight path. Terrain and obstacle alerts are displayed in red and yellow shading on the PFD.

SVT can be displayed on the MFD in Reversionary Mode. If SVT is enabled when switching to Reversionary Mode, it may take up to 30 seconds to be displayed. The standard, non-SVT PFD display, will be shown in the interim.

The terrain display is intended for situational awareness only. It may not provide the accuracy or fidelity on which to base decisions and plan maneuvers to avoid terrain or obstacles. Navigation must not be predicated solely upon the use of the terrain or obstacle data indicated by the SVT display.

The following SVT enhancements appear on the PFD:

- Flight Path Marker
- Airport Signs
- Terrain and Obstacle Alerting
- Horizon Heading Marks
- Runway Display
- Pathways
- Zero Pitch Line
- Traffic Display



Figure 2-32 Synthetic Vision Imagery

SVT OPERATION

SVT functions are displayed on three levels of softkeys. The **PFD Opt** Softkey leads into the PFD function softkeys, including synthetic vision. Pressing the **SVT** Softkey displays the SVT feature softkeys. The softkeys are labeled **Pathways**, **Terrain**, **HDG LBL**, and **APT Sign**. The **Back** Softkey returns to the previous level of softkeys. Synthetic Terrain must be active before any other SVT feature may be activated. A green annunciator on the softkey label indicates the feature is activated.

Pathways, **Terrain**, **HDG LBL**, and **APT Sign** softkeys are only available when the **Terrain** Softkey is activated (annunciator turns green). When the **Terrain** Softkey is activated, the Flight Path Marker is automatically displayed on the PFD. When system power is cycled, the last selected state (on or off) of the **Pathways**, **Terrain**, **HDG LBL**, and **APT Sign** softkeys is remembered by the system.

- **Pathways** Softkey enables display of rectangular boxes that represent course guidance.
- **Terrain** Softkey enables synthetic terrain depiction.
- **HDG LBL** Softkey enables the display of heading marks and digits on the Zero Pitch Line.
- **APT Sign** Softkey enables airport signposts.
- The crew profile defines the state (on or off) of these features.

Activating and deactivating SVT:

- 1) Press the **PFD Opt** Softkey.
- 2) Press the **SVT** Softkey.
- 3) Press the **Terrain** Softkey. The SVT display will cycle on or off with the **Terrain** Softkey.

SVT FEATURES



Figure 2-33 SVT on the Primary Flight Display

ZERO PITCH LINE

The Zero Pitch Line is drawn completely across the display and represents the horizon when the terrain horizon is difficult to distinguish from other terrain being displayed. It may not align with the terrain horizon, particularly when the terrain is mountainous or when the aircraft is flown at high altitudes.

HORIZON HEADING

The Horizon Heading is synchronized with the HSI and shows approximately 60 degrees of compass heading in 30-degree increments on the Zero Pitch Line. Horizon Heading tick marks and digits appearing on the Zero Pitch Line are not visible behind either the airspeed or altitude display. Horizon Heading is used for general heading awareness, and is activated and deactivated by pressing the **HDG LBL** Softkey.

Activating and deactivating Horizon Heading:

- 1) Press the **PFD Opt** Softkey.
- 2) Press the **SVT** Softkey.
- 3) Press the **Terrain** Softkey if necessary to activate synthetic terrain (green annunciator).
- 4) Press the **HDG LBL** Softkey. The Horizon Heading display will cycle on or off with the **HDG LBL** Softkey.

FLIGHT PATH MARKER



NOTE: Do not use the *Flight Path Marker* as a *flight director*.

The Flight Path Marker (FPM), also known as a Velocity Vector, is displayed on the PFD at groundspeeds above 30 knots. The FPM depicts the approximate projected path of the aircraft accounting for wind speed and direction relative to the three-dimensional terrain display.

The FPM is always available when the synthetic terrain feature is in operation. The FPM represents the direction of the flight path as it relates to the terrain and obstacles on the display, while the airplane symbol represents the aircraft heading.

The FPM works in conjunction with the Pathways feature to assist the pilot in maintaining desired altitude and direction when navigating a flight plan. When on course and altitude, the FPM is aligned inside the Pathways boxes.

The FPM may also be used to identify a possible conflict with the aircraft flight path and distant terrain or obstacles. Displayed terrain or obstacles in the aircraft's flight path extending above the FPM could indicate a potential conflict, even before the system issues a terrain or obstacle caution or warning. However, decisions regarding terrain and/or obstacle avoidance should not be made using only the FPM.



Figure 2-34 Flight Path Marker

PATHWAYS

Pathways provide a three-dimensional perspective view of the selected route of flight shown as colored rectangular boxes representing the horizontal and vertical flight path of the active flight plan. The box size represents 700 feet wide by 200 feet tall during enroute, oceanic, and terminal flight phases. During an approach, the box width is 700 feet or one half full scale deviation on the HSI, whichever is less. The

height is 200 feet or one half full scale deviation on the VDI, whichever is less. The altitude at which the Pathways boxes are displayed is determined by the higher of either the Selected Altitude or the VNAV altitude programmed for the active leg in the flight plan.



NOTE: Pathways and terrain features are not a substitute for standard course and altitude deviation information provided by the Altimeter, CDI, and VDI.

Activating and deactivating Pathways:

- 1) Press the **PFD Opt** Softkey.
- 2) Press the **SVT** Softkey.
- 3) Press the **Pathways** Softkey. The Pathways feature will cycle on or off with the **Pathways** Softkey.

The color of the rectangular boxes may be magenta, green, or white depending on the route of flight and navigation source selected. The active GPS or GPS overlay flight plan leg is represented by magenta boxes that correspond to the magenta CDI. A localizer course is represented by green boxes that correspond to a green CDI. An inactive leg of an active flight plan is represented by white boxes, corresponding to a white line drawn on the navigation map indicating an inactive leg.

Pathways provide supplemental glidepath/glideslope information on an active ILS, LPV, LNAV/VNAV, and some LNAV approaches. Pathways are intended as an aid to situational awareness and should not be used independent of the CDI, VDI, Glidepath Indicator, and Glideslope Indicator. They are removed from the display when the selected navigation information is not available. Pathways are not displayed beyond the active leg when leg sequencing is suspended and are not displayed on any portion of the flight plan leg that would lead to intercepting a leg in the wrong direction.

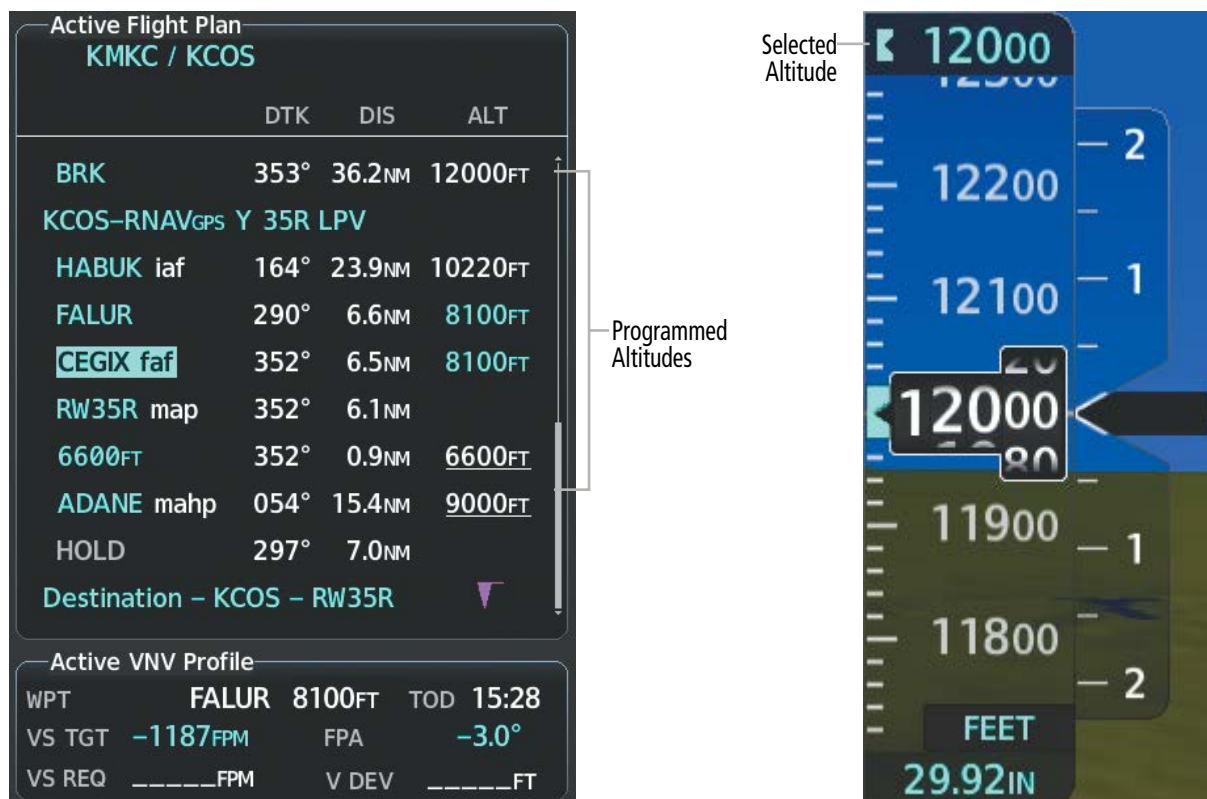


Figure 2-35 Programmed and Selected Altitude

DEPARTURE AND ENROUTE

Prior to intercepting an active flight plan leg, Pathways are displayed as a series of boxes with pointers at each corner that point in the direction of the active waypoint. Pathways are not displayed for the first leg of the flight plan if that segment is a Heading-to-Altitude leg. The first segment displaying Pathways is the first active GPS leg or active leg with a GPS overlay. If this leg of the flight plan route is outside the SVT Field of View, Pathways will not be visible until the aircraft has turned toward this leg. While approaching the center of the active leg and prescribed altitude, the number of Pathways boxes decreases to a minimum of four.

Climb profiles cannot be displayed due to the variables associated with aircraft performance. Flight plan legs requiring a climb are indicated by Pathways displayed at a level above the aircraft at the altitude selected or programmed.

DESCENT AND APPROACH

During an approach, Pathways can be shown for the programmed descent, level transition flight, and at the Selected Altitude within the approach segments. When an approach providing vertical guidance is activated, the corresponding approach glideslope or glidepath will be displayed using a color corresponding to the selected navigation source and conditions.

White Pathways represent the next segment of the approach that is not yet active. Magenta Pathways represent the active segment with GPS as the navigation source. Green Pathways indicate the ILS/LOC navigation source. With active approach vertical guidance, the Selected Altitude will be displayed as a level gray Pathway if the Selected Altitude is lower than the glidepath/glideslope. The gray Selected Altitude Preview Pathways are displayed until they converge with the green glideslope or magenta glidepath Pathways. If approach vertical guidance is not yet active, Pathways at the Selected Altitude will be displayed in magenta throughout the arrival/approach.

During an ILS approach, the initial approach segment is displayed in magenta at the segment altitudes if GPS is the selected as the navigation source on the CDI. When switching to localizer inbound with the LOC selected as the navigation source on the CDI, Pathways are displayed in green along the localizer and glideslope. VOR, LOC, BC, and ADF approach segments that are approved to be flown using GPS are displayed in magenta boxes. Segments that are flown using other than GPS or ILS, such as heading legs or VOR final approach courses, are not displayed.

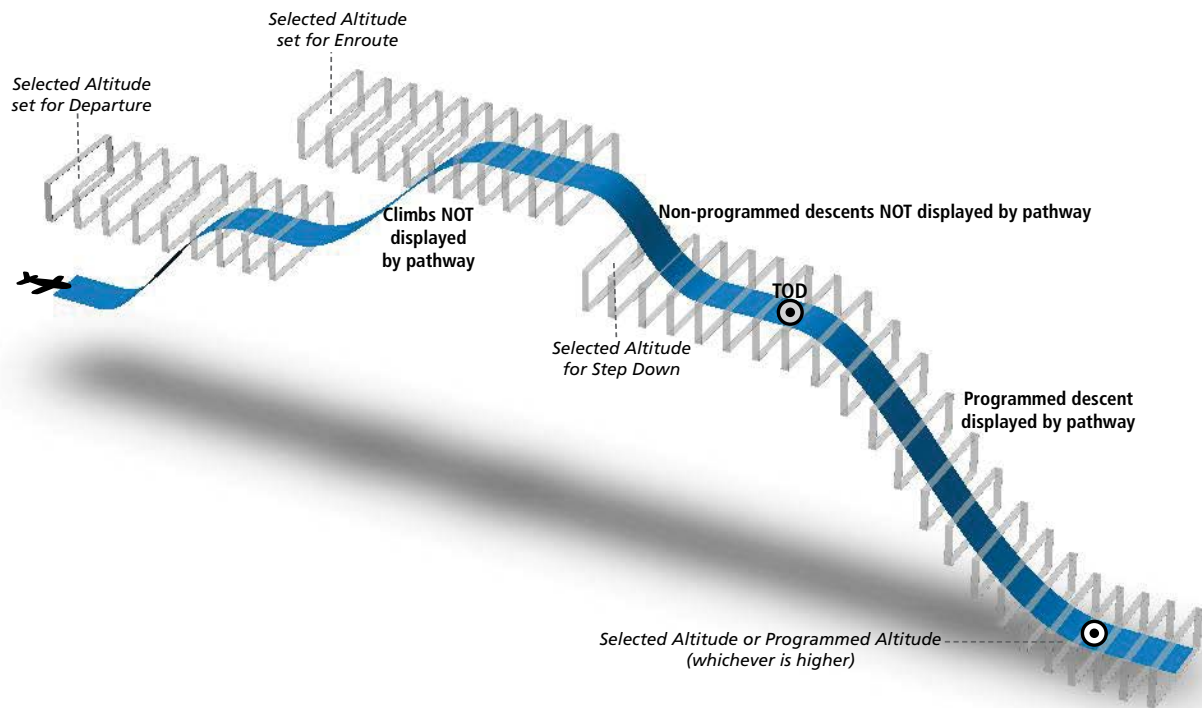


Figure 2-36 SVT Pathways, Enroute and Descent

MISSED APPROACH

Upon activating the missed approach, Pathways lead to the Missed Approach Holding Point (MAHP) and are displayed as a level path at the published altitude for the MAHP, or the Selected Altitude, whichever is the highest. If the initial missed approach leg is a Course-to-Altitude (CA) leg, the Pathways boxes will be displayed level at the altitude published for the MAHP. If the initial missed approach leg is defined by a course using other than GPS, Pathways are not displayed for that segment. In this case, the Pathways displayed for the next leg may be outside the Field of View and will be visible when the aircraft has turned in the direction of that leg.

Pathways are displayed along each segment, including the path required to track course reversals that are part of a procedure, such as holding patterns. Pathways boxes will not indicate a turn to a MAHP unless a defined geographical waypoint exists between the MAP and MAHP.

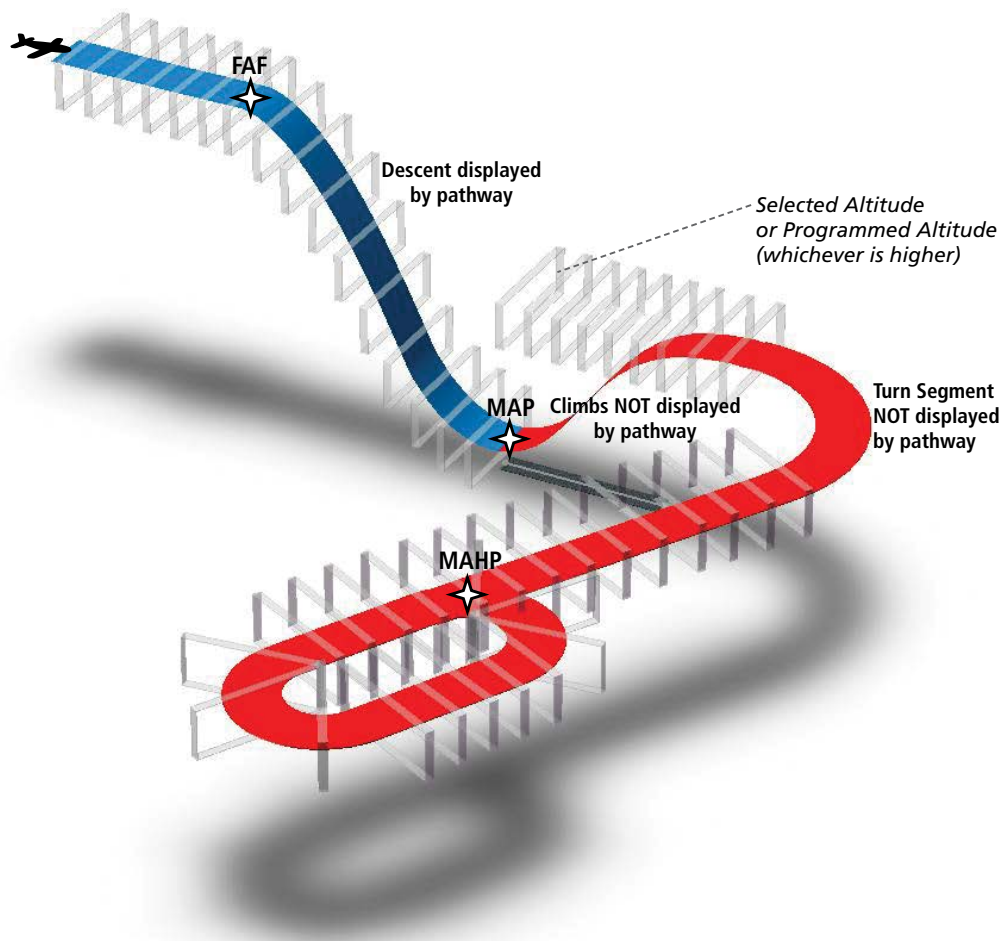


Figure 2-37 SVT Pathways, Approach, Missed Approach, and Holding

TRAFFIC



NOTE: Intruder aircraft at or below 500 ft. AGL may not appear on the Garmin SVT display or may appear as a partial symbol.

Traffic symbols are displayed in their approximate locations as determined by the related traffic systems. Traffic symbols are displayed in three dimensions, appearing larger as they are getting closer, and smaller when they are further away. Traffic within 250 feet laterally of the aircraft will not be displayed on the SVT display. Traffic symbols and coloring are consistent with that used for traffic displayed on the Inset Map or MFD traffic map. If the traffic altitude is unknown, the traffic will not be displayed on the SVT display. For more details refer to the traffic system discussion in the Hazard Avoidance Section.

AIRPORT SIGNS

Airport Signs provide a visual representation of airport location and identification on the synthetic terrain display. When activated, the signs appear on the display when the aircraft is approximately 15 nm from an airport and disappear at approximately 4.5 nm. Airport signs are shown without the identifier until the aircraft is approximately 8 nm from the airport. Airport Signs are not shown behind the airspeed or altitude display. Airport Signs are activated and deactivated by pressing the **APT Sign** Softkey.

Activating and deactivating Airport Signs:

- 1) Press the **PFD Opt** Softkey.
- 2) Press the **SVT** Softkey.
- 3) Press the **Terrain** Softkey if necessary to activate synthetic terrain (green annunciator).
- 4) Press the **APT Sign** Softkey. Display of airport signs will cycle on or off with the **APT Sign** Softkey.



Figure 2-38 Airport Signs

RUNWAYS



WARNING: Do not use Garmin SVT runway depiction as the sole means for determining the proximity of the aircraft to the runway or for maintaining the proper approach path angle during landing.



NOTE: Not all airports have runways with endpoint data in the database. Therefore, these runways are not displayed.

Runway data provides improved awareness of runway location with respect to the surrounding terrain. All runway thresholds are depicted at their respective elevations as defined in the database. In some situations, where threshold elevations differ significantly, crossing runways may appear to be layered. As runways are displayed, those within 45 degrees of the aircraft heading are displayed in white. Other runways will be gray in color. When an approach for a specific runway is active, that runway will appear brighter and be outlined with a white box, regardless of the runway orientation as related to aircraft heading. As the aircraft gets closer to the runway, more detail such as runway numbers and centerlines will be displayed.



Figure 2-39 Airport Runways

TERRAIN AND OBSTACLE ALERTING

Terrain alerting on the synthetic terrain display is triggered by Forward-looking Terrain Avoidance (FLTA) alerts, and corresponds to the yellow terrain shading for a caution alert and the red shading for a warning alert on the navigation map displays. For more detailed information, refer to the Hazard Avoidance Section.



Figure 2-40 Terrain Caution Alert (Yellow)

In some instances, a terrain or obstacle alert may be issued with no conflict shading displayed on the synthetic terrain. In these cases, the conflict is outside the SVT Field of View to the left or right of the aircraft.

Obstacles are represented on the synthetic terrain display by standard two-dimensional tower symbols found on the Inset Map and MFD maps and charts. To depict obstacles from the pilot's perspective, the synthetic terrain display determines the size of each obstacle symbol using the obstacle's relative height above terrain and distance from the aircraft. Obstacles greater than 1000 feet below the aircraft altitude are not shown. Obstacles are shown behind the airspeed and altitude displays.




Figure 2-41 Obstacle Caution Alert (Yellow) and Warning Alert (Red)

FIELD OF VIEW

The PFD Field of View can be represented on the 'Map – Navigation Map' Page. Two dashed lines forming a V-shape in front of the aircraft symbol on the map represent the forward viewing area shown on the PFD.

Configuring Field of View:

- 1) While viewing the 'Map – Navigation Map' Page, press the **MENU** Key to display the 'Page Menu'.
- 2) Turn the large **FMS** Knob to highlight 'Map Settings' and press the **ENT** Key.
- 3) Turn the small **FMS** Knob to highlight 'Map' in the 'Group' Box and press the **ENT** Key.
- 4) Turn the large **FMS** Knob to scroll through the Map Group options to 'Field of View'.
- 5) Turn the small **FMS** Knob to select 'On' or 'Off'.
- 6) Push the **FMS** Knob to return to the 'Map – Navigation Map' Page.

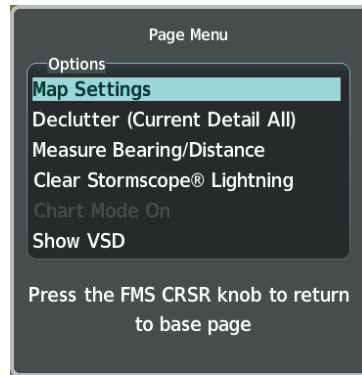

'Map – Navigation Map' Page Menu



Field of View

'Map Settings' Menu, 'Map' Group, 'Field of View' Option

Figure 2-42 Field of View Option Menus

The following figure compares the PFD forward looking depiction with the MFD plan view with Field of View turned on.



SVT View on the PFD

Lines
Depict PFD
Field of
View

Field of View on the MFD

Figure 2-43 PFD and MFD Field of View Comparison

2.4 PFD ANNUNCIATIONS AND ALERTING FUNCTIONS

The following annunciations and alerting functions pertaining to flight instruments are displayed on the PFD. Refer to the Appendices for more information on alerts and annunciations.

MARKER BEACON ANNUNCIATIONS

Marker Beacon Annunciations are displayed on the PFD to the left of the Altimeter. The outer marker (O) reception is indicated in cyan, middle (M) in amber, and inner (I) in white. Refer to the Audio and CNS Section for more information on Marker Beacon Annunciations.

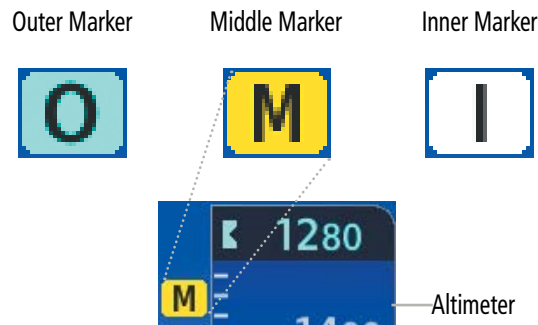


Figure 2-44 Marker Beacon Annunciations

ALTITUDE ALERTING

Altitude Alerting provides the pilot with a visual alert when approaching the Selected Altitude. Whenever the Selected Altitude is changed, the Altitude Alerter is reset. The following occur when approaching the Selected Altitude:

- Upon passing through 1000 feet of the Selected Altitude, the Selected Altitude changes to black text on a cyan background and flashes for five seconds.
- When the aircraft passes within 200 feet of the Selected Altitude an aural tone is heard. The Selected Altitude changes to cyan text on a black background and flashes for five seconds.
- After reaching the Selected Altitude, if the pilot flies outside the deviation band (± 200 feet of the Selected Altitude) an aural tone is heard. The Selected Altitude changes to amber text on a black background and flashes for five seconds.



Figure 2-45 Altitude Alerting Visual Annunciations

BARO TRANSITION ALERTS

The Baro Transition Alerts flash the barometric pressure setting to remind the pilot to change the barometric pressure setting to or from standard. Two alerts are available. The Altitude Baro Transition Alert occurs when climbing through the transition altitude, beginning at 200 feet below this altitude. The Flight Level Baro Transition Alert occurs when descending through the transition flight level, beginning at 200 feet above this flight level. The barometric pressure setting stops flashing after the pilot changes the barometric pressure setting. The pilot can enable/disable either Baro Transition Alert, and choose the altitude or flight level used to trigger the alerts.

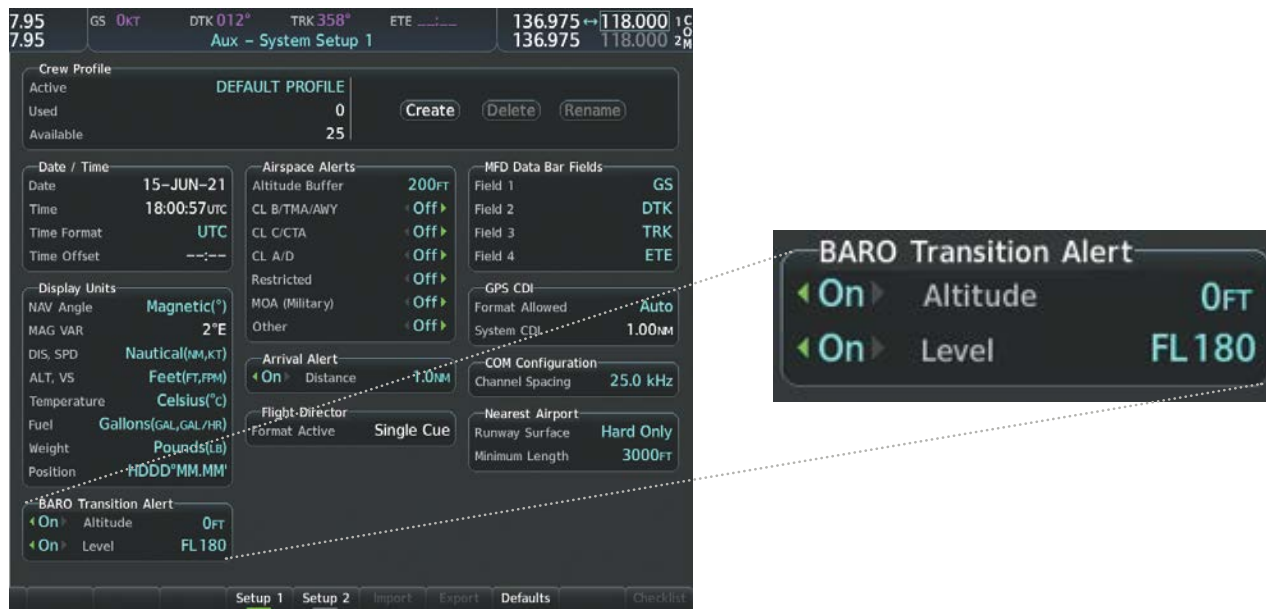


Figure 2-46 BARO Transition Alert ('Aux – System Setup 1' Page)

Setting the Baro Transition Alerts:

- 1) Use the **FMS** Knob (and press the **Setup 1** Softkey, if necessary) to select the 'Aux – System Setup 1' Page.
- 2) Push the **FMS** Knob to activate the cursor.
- 3) Turn the large **FMS** Knob to highlight 'On' or 'Off' associated with the 'Altitude' Field in the 'BARO Transition Alert' Box.
- 4) Turn the small **FMS** Knob to set the BARO Transition Alert Altitude to 'On' or 'Off'.
- 5) Turn the large **FMS** Knob to highlight the 'Altitude' Field in the 'BARO Transition Alert' Box.
- 6) Use the **FMS** Knob to change the altitude and press the **ENT** Key to accept or press the **CLR** Key to return to the previous altitude selection.
- 7) Turn the large **FMS** Knob to highlight 'On' or 'Off' associated with the 'Level' Field in the 'BARO Transition Alert' Box.
- 8) Turn the small **FMS** Knob to set the BARO Transition Alert Flight Level to 'On' or 'Off'.
- 9) Turn the large **FMS** Knob to highlight the 'Level' Field in the 'BARO Transition Alert' Box.
- 10) Use the **FMS** Knob to change the flight level for the alert and press the **ENT** Key to accept or press the **CLR** Key to return to the previous altitude selection.
- 11) Push the **FMS** Knob to deactivate the cursor.

LOW ALTITUDE ANNUNCIATION



NOTE: A Low Altitude Annunciation is available only when SBAS is available. This annunciation is only available when terrain alerting has been inhibited, is not available, or has failed.

When the FAF is the active waypoint in a GPS SBAS approach using vertical guidance, a Low Altitude Annunciation may appear if the current aircraft altitude is at least 164 feet below the prescribed altitude at the FAF. A black-on-amber 'LOW ALT' annunciation appears to the top left of the Altimeter, flashes for several seconds, then remains displayed until the condition is resolved.

LOW ALT

Figure 2-47 Low Altitude on GPS SBAS Approach

MINIMUM ALTITUDE ALERTING

For altitude awareness, a Minimum Altitude Alert based on barometric or temperature compensated altitude can be set. This alert is reset if the current approach is deleted, another approach is loaded, or the system power is operated off then on. When active, the altitude setting is displayed to the lower left of the Altimeter and with a bug at the corresponding altitude along the Altimeter (once the altitude is within the visible range of the tape). The function serves only as an alert and does not couple to the autopilot. The following visual annunciations alert the pilot when approaching the alert setting:

- When the aircraft altitude descends to within 2500 feet of the alert setting, the 'BARO MIN' or 'COMP MIN' box appears with the altitude in cyan text (magenta for COMP MIN). The bug appears on the altitude tape in cyan (magenta for COMP MIN) once in range.
- When the aircraft enters within 100 feet of the alert, the bug and text turn white.
- Once the aircraft reaches the alert altitude, the bug and text turn amber and the voice alert, "Minimums Minimums," is heard.

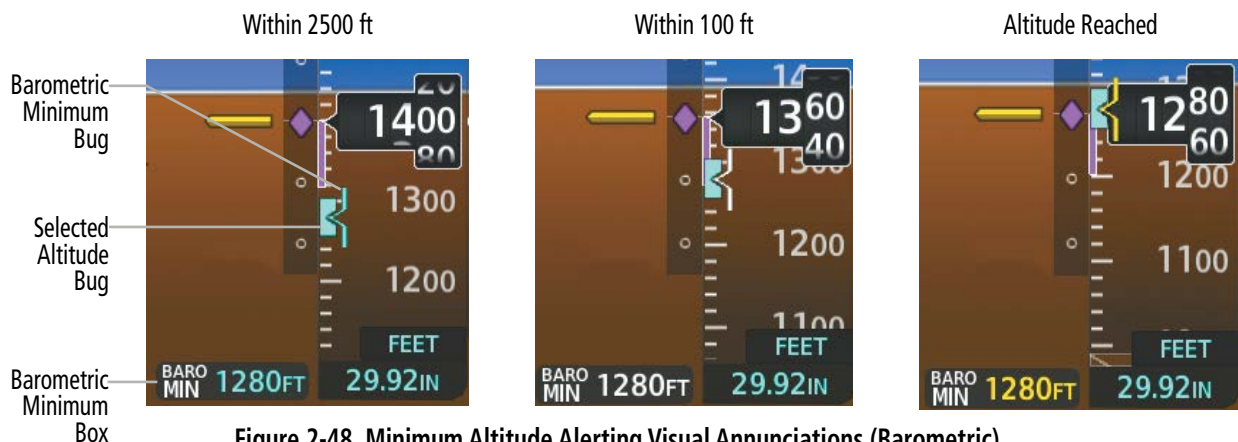


Figure 2-48 Minimum Altitude Alerting Visual Annunciations (Barometric)

Alerting is inhibited while the aircraft is on the ground and until the aircraft reaches 150 feet above the set value. If the aircraft proceeds to climb after having reached the alerting altitude, once it reaches 50 feet above the value, alerting is disabled.

Setting the Minimum Altitude Alert and bug:

- 1) Press the **TMR/REF** Softkey.
- 2) Turn the large **FMS** Knob to highlight the Minimums ('MINS') Field.
- 3) Turn the small **FMS** Knob to select 'BARO' or 'TEMP COMP'. 'Off' is selected by default. Press the **ENT** Key or turn the large **FMS** Knob to highlight the next field.

- 4) Use the small **FMS** Knob to enter the desired altitude (from zero to 16,000 feet).
- 5) If 'TEMP COMP' was selected, press the **ENT** Key or turn the large **FMS** Knob to highlight the next field and then enter the temperature (-59°C to 59°C).
- 6) To remove the window, press the **CLR** Key or the **TMR/REF** Softkey.



Figure 2-49 BARO and TEMP COMP Minimum Altitude Alerting

2.5 ABNORMAL OPERATIONS

ABNORMAL GPS CONDITIONS

The annunciations listed in the following table can appear on the HSI when abnormal GPS conditions occur. GPS navigation will resume automatically once a valid GPS solution is restored (and GPS sensors have not been inhibited). Refer to the Flight Management Section for more information on abnormal GPS conditions.

Annunciation	Location	Description
GPS LOI	Right of HSI	Loss of Integrity Monitoring—GPS integrity is not available or is insufficient for the current phase of flight
GPS INTEG OK	Right of HSI	Integrity OK—GPS integrity has been restored to within normal limits (annunciation displayed for 5 seconds)
DR	Lower left of aircraft symbol	Dead Reckoning—System is using projected position rather than GPS position to compute navigation data and sequence active flight plan waypoints

Table 2-3 Abnormal GPS Conditions Annunciated on HSI

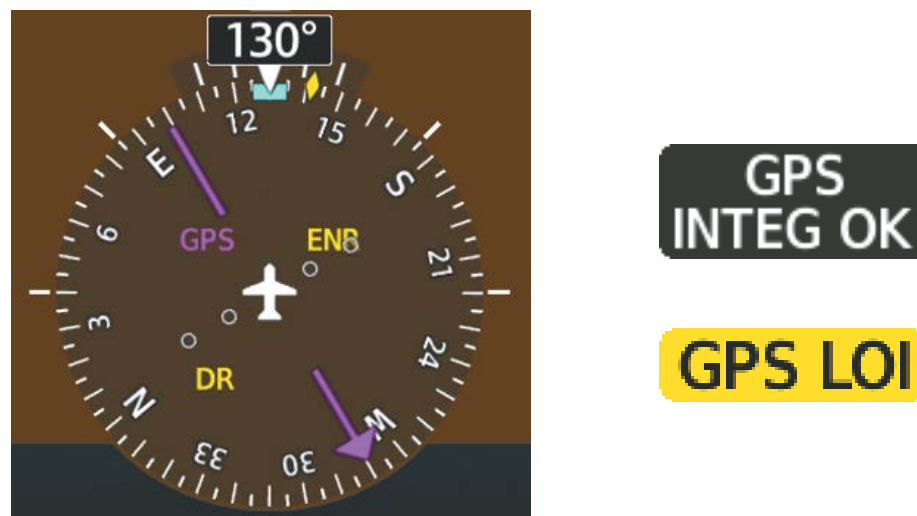


Figure 2-50 Example HSI Annunciations

Dead Reckoning (DR) Mode causes the following items on the PFD to be shown in amber when GPS is the selected navigation source:

- Current Track Bug
- Flight Phase
- Groundspeed
- Wind Data (calculated based on GPS information)
- Distances in the Bearing Information Windows
- GPS Bearing Pointers
- Active Flight Plan Distances, Bearings, and ETE Values

It is important to note that estimated navigation data supplied by the system in DR Mode may become increasingly unreliable and must not be used as a sole means of navigation. See the Flight Management Section for more information about DR Mode.

GARMIN SVT TROUBLESHOOTING

Garmin SVT is intended to be used with traditional attitude, heading, obstacle, terrain, and traffic inputs. SVT is disabled when valid attitude or heading data is not available for the display. In case of invalid SVT data, the PFD display reverts to the standard blue-over-brown attitude display.

SVT becomes disabled without the following data resources:

- Attitude Data
- Heading Data
- GPS Position Data
- Terrain Data
- Obstacle Data
- Terrain Alerting Function is Not Available, in Test Mode, or Failed
- The Position of the Aircraft Exceeds the Range of the Terrain Database

GARMIN SVT IN REVERSIONARY MODE

SVT can be displayed on the MFD in Reversionary Mode. If it is enabled when switching to Reversionary Mode, SVT will take up to 30 seconds to be displayed. The standard, non-SVT PFD, display will be shown in the interim.

UNUSUAL ATTITUDES

When the aircraft enters an unusual pitch attitude, red chevrons pointing toward the horizon warn of extreme pitch. The chevrons are displayed on the Attitude Indicator, starting at 50° above and 30° below the horizon line.

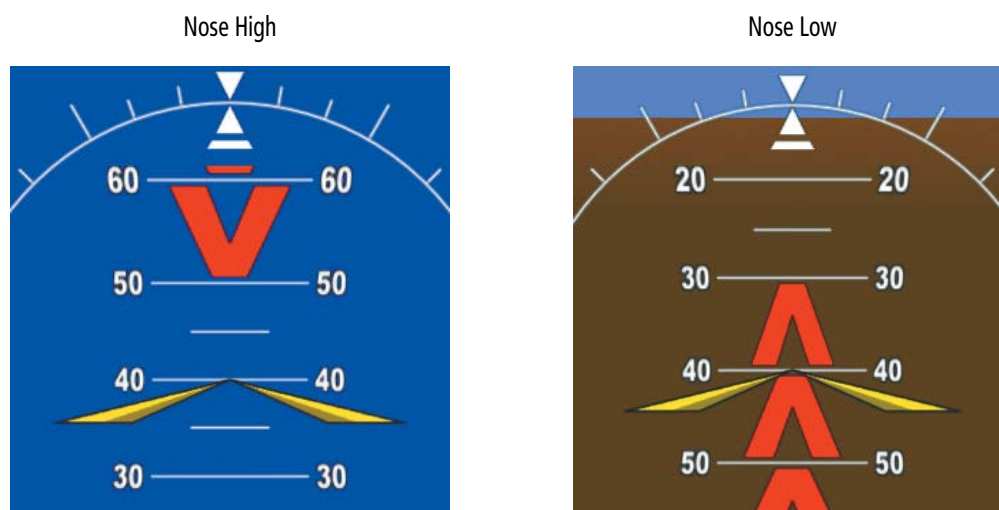


Figure 2-51 Pitch Attitude Warnings

If pitch exceeds +30°/-20° or bank exceeds 65°, some information displayed on the PFD is removed. The Altimeter and Airspeed, Attitude, Vertical Speed, and Horizontal Situation indicators remain on the display and the Bearing Information, Alerts, and Annunciation windows can be displayed during such situations. The following information is removed from each PFD and their softkeys are disabled when the aircraft experiences unusual attitudes:

- Traffic Annunciations
- AFCS Annunciations
- True Airspeed
- Groundspeed
- Inset Map
- Temperature Displays
- Wind Data
- Selected Heading Indication
- Selected Course Indication
- System Time
- Transponder Status Box
- Altimeter Barometric Setting
- Selected Altitude
- VNV Target Altitude Windows Displayed on the PFD
- Minimum Altitude Alert Setting
- Vertical Deviation, Glideslope, and Glidepath Indicators

GARMIN SVT UNUSUAL ATTITUDES

During extreme pitch attitudes, the display shows either a brown or blue colored bar at the top or bottom of the screen to represent earth or sky. The blue colored bar is also displayed when terrain gradient is great enough to completely fill the display. This is intended to prevent losing sight of the horizon during extreme pitch attitudes.



Figure 2-52 Blue Sky Bar with Full Display Terrain

SYSTEM OVERVIEW
FLIGHT INSTRUMENTS
EIS
AUDIO & CNS
FLIGHT MANAGEMENT
HAZARD AVOIDANCE
AFCS
ADDITIONAL FEATURES
APPENDICES
INDEX

Blank Page

SECTION 3 ENGINE INDICATION SYSTEM (EIS)



NOTE: The gauge values shown in this section are taken from an example configuration. Refer to the current version of the pertinent flight manual for specific values and operating limitations.

The Engine Indication System (EIS) displays critical engine, electrical, fuel, and other system parameters on the left side of the Multi Function Display (MFD) during normal operations.

EIS Display



Figure 3-1 MFD (Normal Mode)

The EIS instrument types include dial gauges, horizontal slide bar indicators, and digital displays. Green bands indicate normal ranges of operation; amber and red bands indicate caution and warning, respectively. When unsafe operating conditions occur, displays and labels may change color corresponding to the level of the condition. The pointers on the horizontal bar indicators appear in white to indicate normal operation and change to amber or red to indicate caution or warning conditions.

If sensory data to an instrument becomes invalid or unavailable, an amber “X” is shown across the instrument. If a display value is out of range, dashes ‘---’ are shown instead of a display.

3.1 ENGINE DISPLAY



NOTE: Refer to the current version of the pertinent flight manual for the appropriate engine limits.

EIS information is presented using gauges and digital displays. Green bands on the instruments indicate normal ranges of operation; amber and red bands indicate caution and warning, respectively. White or uncolored bands indicate areas outside of normal operation not yet in the caution or warning ranges. When unsafe operating conditions occur, the corresponding displays flash to indicate cautions and warnings as appropriate. If sensory data to an instrument becomes invalid or unavailable, an amber “X” is shown across the instrument. If a display value is out of range, dashes ‘---’ are shown instead of a display.

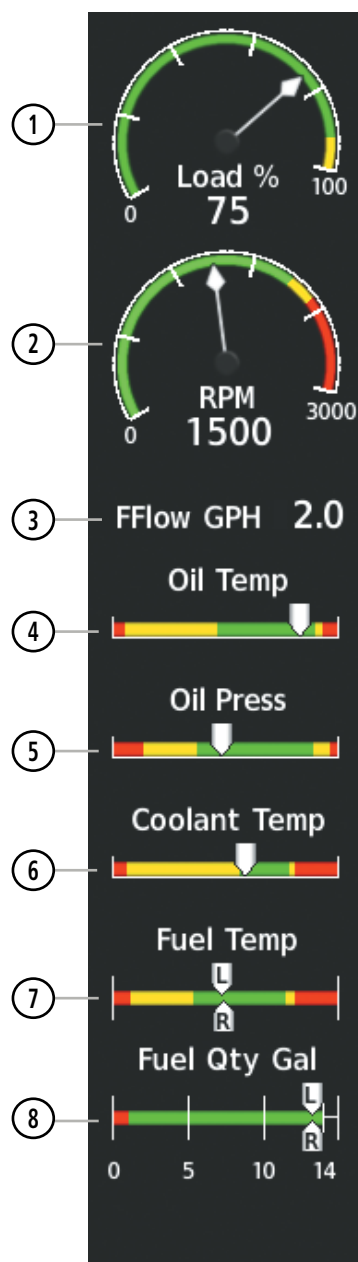


Figure 3-2 Engine Display

1 Engine Load Indicator (Load %)

Displays current engine load as a percentage (%).

The green band indicates the normal operating range, and the amber band indicates the cautionary range. If the indication is in the caution range, the analog pointer, 'Load %', and the numerical digits will display black with amber background.

2 Tachometer (RPM)

Displays propeller speeds in revolutions per minute (RPM).

The green band indicates the normal operating range. The amber band indicates the cautionary range, and the red band indicates the warning range. If the indication is in the caution range, the analog pointer, 'RPM', and the numerical digits will display black with amber background. If the indication is in the warning range, the analog pointer, 'RPM', and the numerical digits will flash white with red background.

3 Fuel Flow Indicator (FFlow GPH)

Displays digital value of current fuel flow in gallons per hour (GPH).

4 Oil Temperature Indicator (Oil Temp)

Displays engine oil temperature ranges.

The green band indicates the normal operating range. The amber bands indicate the cautionary ranges, and the red bands indicate the warning ranges. If the indication is in the caution ranges, the slide pointer and 'Oil Temp' will display black with amber background. If the indication is in the warning ranges, the slide pointer and 'Oil Temp' will flash white with red background.

5 Oil Pressure Indicator (Oil Press)

Displays engine oil pressure ranges.

The green band indicates the normal operating range. The amber bands indicate the cautionary ranges, and the red bands indicate the warning ranges. If the indication is in the caution ranges, the slide pointer and 'Oil Press' will display black with amber background. If the indication is in the warning ranges, the slide pointer and 'Oil Press' will flash white with red background.

6 Coolant Temperature Indicator (Coolant Temp)

Displays coolant temperature ranges.

The green band indicates the normal operating range. The amber bands indicate the cautionary ranges, and the red bands indicate the warning ranges. If the indication is in the caution ranges, the slide pointer and 'Coolant Temp' will display black with amber background. If the indication is in the warning ranges, the slide pointer and 'Coolant Temp' will flash white with red background.

7 Fuel Temperature Indicator (Fuel Temp)

Displays fuel temperature for each main tank; pointers labeled L and R indicate the fuel temperature in each tank.

The green band indicates the normal operating range. The amber bands indicate the cautionary ranges, and the red bands indicate the warning ranges. If the indication is in the caution ranges, the analog pointer and 'Fuel Temp' will display black with amber background. If the indication is in the warning ranges, the analog pointer and 'Fuel Temp' will flash white with red background.

8 Fuel Quantity Indicator (Fuel Qty Gal)

Displays the fuel quantity in gallons (Gal) for each tank.

The green band indicates the normal operating range. The red band indicates the warning range. If the indication is in the warning range, the left (L), right (R), or both slide pointer(s), and 'Fuel Qty Gal' will flash white with red background.

3.2 ENGINE PAGE

The ‘EIS - Engine’ Page displays all engine, fuel, electrical, and fuel calculation information. To access this page, press the **Engine** Softkey or turn the large **FMS** Knob and select EIS. Refer to Table 3-1 for ‘EIS - Engine’ Page softkey functions.

Level 1	Level 2	Description
Engine		Displays ‘EIS - Engine’ Page and second-level engine softkeys; press again to exit page.
	DEC Fuel	Decreases displayed gallons remaining in 1-gal increments.
	INC Fuel	Increases displayed gallons remaining in 1-gal increments.
	RST Fuel	Resets displayed fuel remaining to maximum fuel capacity for aircraft and fuel used to zero.

Table 3-1 ‘EIS-Engine’ Page Softkeys

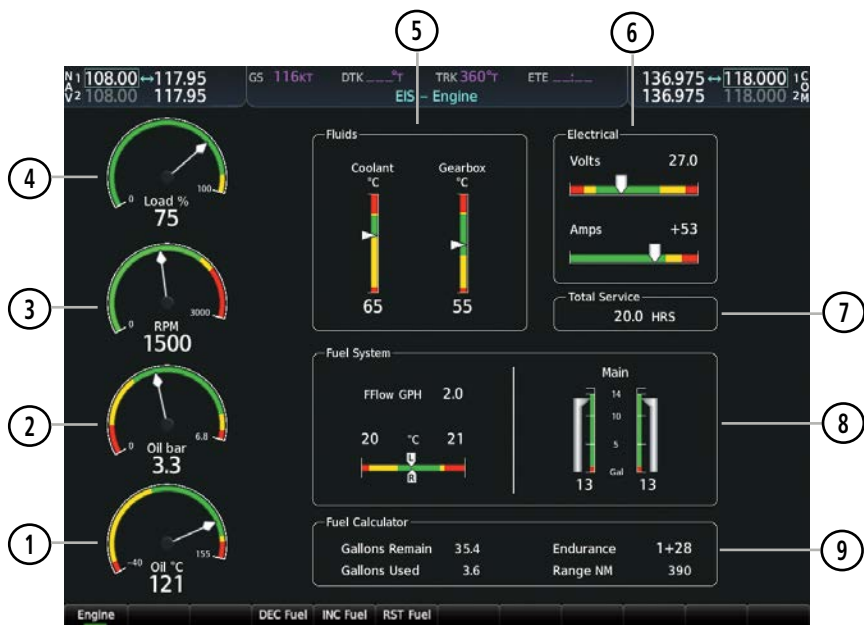


Figure 3-3 EIS-Engine Page

① Oil Temperature Indicator (Oil °C)

Displays engine oil temperature ranges in degrees Celsius (°C).

The green band indicates the normal operating range. The amber band indicates the cautionary range, and the red band indicates the warning range. If the indication is in the caution range, the analog pointer, 'RPM', and the numerical digits will display black with amber background. If the indication is in the warning range, the analog pointer, 'RPM', and the numerical digits will flash white with red background.

② Oil Pressure Indicator (Oil bar)

Displays engine oil pressure ranges in bar.

The green band indicates the normal operating range. The amber bands indicate the cautionary ranges, and the red bands indicate the warning ranges. If the indication is in the caution ranges, the analog pointer, 'Oil bar' and the numerical digits will display black with amber background. If the indication is in the warning ranges, the analog pointer, 'Oil bar' and the numerical digits will flash white with red background.

③ Tachometer (RPM)

Displays propeller speed in revolutions per minute (rpm).

The green band indicates the normal operating range. The amber band indicates the cautionary range, and the red band indicates the warning range. If the indication is in the caution range, the analog pointer, 'RPM', and the numerical digits will display black with amber background. If the indication is in the warning range, the analog pointer, 'RPM', and the numerical digits will flash white with red background.

④ Engine Load Indicator (Load %)

Displays current engine load as percentages.

The green band indicates the normal operating range, and the amber band indicates the cautionary range. If the indication is in the caution range, the analog pointer, 'Load %', and the numerical digits will display black with amber background.

⑤ Fluids Group

Displays coolant temperature ranges.

The green band indicates the normal operating range. The amber bands indicate the cautionary ranges, and the red bands indicate the warning range. If the indication is in the caution ranges, the analog pointer, 'Coolant °C', and the numerical digits will display black with amber background. If the indication is in the warning ranges, the analog pointer, 'Coolant °C', and the numerical digits will flash white with red background.

Displays the temperature of the gearbox in degrees Celsius (°C).

The green band indicates the normal operating range. The amber bands indicate the cautionary ranges, and the red bands indicate the warning range. If the indication is in the caution ranges, the analog pointer, 'Gearbox °C', and the numerical digits will display black with amber background. If the indication is in the warning ranges, the analog pointer, 'Gearbox °C', and the numerical digits will flash white with red background.

⑥ Electrical Group

Displays primary bus in voltage (Volts).

The green band indicates the normal operating range. The amber bands indicate the cautionary ranges, and the red bands indicate the warning range. If the indication is in the caution ranges, the analog pointer, 'Volts', and the numerical digits will display black with amber background. If the indication is in the warning ranges, the analog pointer, 'Volts', and the numerical digits will flash white with red background.

Displays alternator load in amperes (Amps).

The green band indicates the normal operating range. The amber band indicates the cautionary range, and the red band indicates the warning range. If the indication is in the caution range, the analog pointer, 'Amps', and the numerical digits will display black with amber background. If the indication is in the warning range, the analog pointer, 'Amps', and the numerical digits will flash white with red background.

⑦ Total Service

Displays the aircraft's total flight hours (hrs); activated when the aircraft becomes airborne.

⑧ Fuel System Group

Displays fuel quantity in the left and right main tanks in gallons (gal).

The green band indicates the normal operating range. The red band indicates the warning range. If the indication is in the warning range, the analog bar pointer, 'Main', and the numerical digits for the applicable tank will flash white with red background.

Displays fuel temperature for the left (L) and right (R) tanks in degrees Celsius (°C).

The green band indicates the normal operating range. The amber bands indicate the cautionary ranges, and the red bands indicate the warning ranges. If the indication is in the caution ranges, the analog pointer 'L' or 'R', '°C', and the numerical digits will display black with amber background. If the indication is in the warning range, the analog pointer 'L' or 'R', '°C', and the numerical digits will flash white with red background.

Displays current fuel flow gallons per hour (GPH).

⑨ Fuel Calculator Group

Gallons Remain - Displays current fuel remaining (gal) as set by the pilot and adjusted for fuel burn since last set.

Gallons Used - Displays quantity of fuel used (gal) based on fuel flow since last reset.

Endurance - Displays flight time remaining in hours and minutes (HH:MM) based on the calculated fuel remaining.

Range NM - Displays aircraft range in nautical miles (nm) based on the calculated fuel remaining.

FUEL CALCULATIONS



NOTE: Fuel calculations do not use the aircraft fuel quantity indicators and are calculated from the last time the fuel was reset.

Fuel used (Gallons Used), Endurance, and range (in nautical miles, Range NM) are calculated based on the displayed fuel remaining (Gallons Remain) and the fuel flow totalizer. The calculated range also takes into account the aircraft's heading and the wind direction and speed.

Adjusting the fuel totalizer quantity:

On the Engine Page, use the **DEC Fuel** and **INC Fuel** Softkeys to obtain the desired fuel remaining (Gallons Remain).

Resetting the fuel totalizer:

On the Engine Page, select the **RST Fuel** Softkey; this resets displayed fuel remaining (Gallons Remain) to the maximum fuel capacity for the aircraft and fuel used to zero.

A map feature related to the EIS Fuel Calculations is the Fuel Range Ring, which graphically illustrates the aircraft's remaining range based on the endurance, heading, groundspeed, and wind direction and speed. The solid green circle represents the range until all the remaining fuel is depleted. The dashed green circle indicates the aircraft range until only reserve fuel remains. Once on reserve fuel, the range is indicated by a solid amber circle.

The Fuel Range Ring shifts position in relation to the aircraft according to wind effects. For example, more fuel is required for flying into a headwind, and the aircraft's decreased range in that direction is indicated by the Fuel Range Ring shifting toward the tail of the Aircraft Symbol.

The amount of reserve fuel (only for purposes of the Fuel Range Ring) is set on the Navigation Map Page Setup Menu in terms of remaining flight time. When enabled, the Fuel Range Ring appears on the Navigation Map Page, the Weather Data Link Page, and PFD Inset Map. (Refer to Flight Management for more information on the Fuel Range Ring).

3.3 REVERSIONARY MODE

In the event of a PFD or MFD display failure, the display(s) operating in Reversionary Mode are configured to present PFD symbology together with the EIS Display (refer to the System Overview for information about display reversionary mode).

The EIS Display, in reversionary mode, is identical to the normal EIS Display on the MFD.



Figure 3-4 PFD (Reversionary Mode)

SECTION 4 AUDIO AND CNS

4.1 OVERVIEW

The Communication/Navigation/Surveillance (CNS) system includes the Audio Panels, communication radios, navigation radios, and Mode S transponders. The System Overview Section provides a block diagram description of the Audio Panels and CNS system interconnection.

CNS operation is performed by the following Line Replaceable Units (LRUs):

- Primary Flight Display (PFD)
- Multi Function Display (MFD)
- Integrated Avionics Unit (2)
- Audio Panel
- Mode S Transponder

The MFD/PFD controls are used to tune the communication transceivers and navigation radios.

The Audio Panel provides the traditional audio selector functions of microphone and receiver audio selection. The Audio Panel includes an intercom system (ICS) between the pilot, copilot, and passengers, a marker beacon receiver, and a COM clearance recorder. Ambient noise from the aircraft radios is reduced by a feature called Master Avionics Squelch (MASQ). When no audio is detected, MASQ processing further reduces the amount of background noise from the radios.

The Mode S transponder is controlled with softkeys and the **FMS** Knob located on the Primary Flight Display (PFD). The Transponder Data Box is located to the left of the System Time Box. The data box displays the active four-digit code, mode, and reply status.

PFD CONTROLS AND FREQUENCY DISPLAY



Figure 4-1 PFD Controls, NAV/COM Frequency Tuning Boxes, and ADF/DME Tuning Window

#	Control Name	Description
①	NAV VOL/ID Knob	Controls NAV audio volume level. Push to turn the Morse code identifier audio on and off. Volume level is shown in the NAV frequency field as a percentage.
②	NAV Frequency Transfer Key	Transfers the standby and active NAV frequencies.
③	NAV Knob	Tunes the standby frequencies for the NAV receiver (large knob for MHz; small knob for kHz). Push to move the frequency selected for tuning (cyan numbers) and the Frequency Transfer Arrow between NAV1 and NAV2.
④	NAV Frequency Box	Displays NAV standby and active frequency fields, volume, and station ID. The frequency of the NAV radio selected for navigation is displayed in green.
⑤	COM Frequency Box	Displays COM standby and active frequency fields and volume. The selected COM transceiver frequency is displayed in green. If available, the COM frequency source is displayed below the COM frequency box. A + sign next to the frequency source indicates there is more than one facility in the area that shares the same frequency. The closest facility will be displayed.
⑥	COM Knob	Tunes the standby frequencies for the COM transceiver (large knob for MHz; small knob for kHz). Push to move the frequency selected for tuning (cyan numbers) and the Frequency Transfer Arrow between COM1 and COM2.
⑦	COM Frequency Transfer Key	Transfers the standby and active COM frequencies. Press and hold this key for two seconds to tune the emergency frequency (121.500 MHz) automatically into the active frequency field.
⑧	COM VOL/SQ Knob	Controls COM audio volume level. Push to turn the COM automatic squelch on and off. Volume level is shown in the COM frequency field as a percentage.
⑨	'ADF/DME Tuning' Window	Displays ADF frequencies, volume setting, and modes, and DME tuning selection. Display by pressing the ADF/DME Softkey.
⑩	ENT Key	Validates or confirms an ADF frequency or ADF/DME mode and Auto-tune selection.
⑪	FMS Knob	Flight Management System Knob, used to enter transponder codes, select ADF/DME modes, and Auto-tune entries when 'ADF/DME Tuning' Window or 'NRST' Window is present. Push the FMS Knob to turn the selection cursor on and off. The large knob moves the cursor in the window. The small knob selects individual characters for the highlighted cursor location.
⑫	Transponder Data Box	Displays the transponder code, mode, reply, and ident status for the selected transponder.
⑬	ADF/DME Softkey	Displays the 'ADF/DME Tuning' Window.

AUDIO PANEL CONTROLS

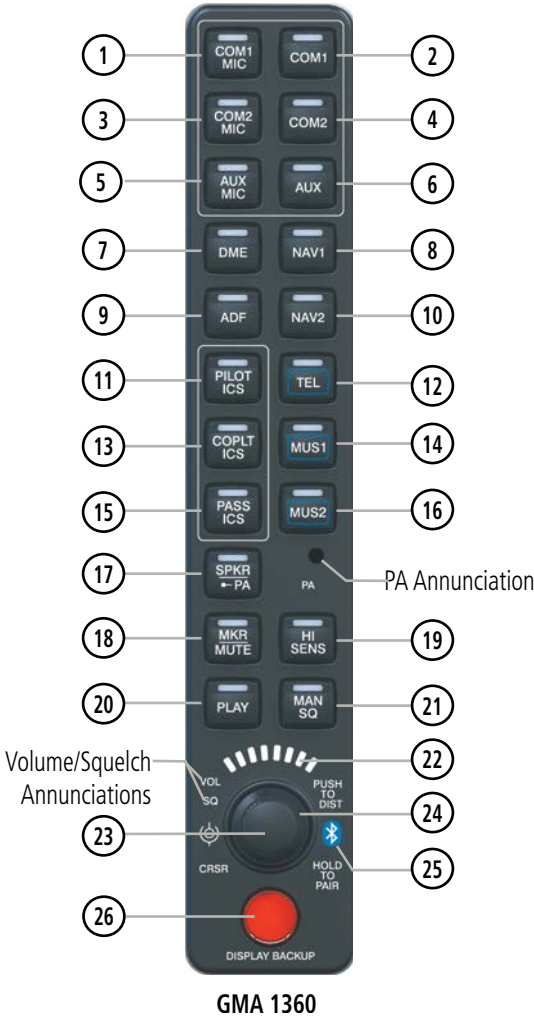


Figure 4-2 Audio Panel Controls

NOTE: When a GMA 1360 Key is selected, the in-key annunciation is illuminated.

	Control Name	Description
1	COM1 MIC	Selects the #1 transmitter for transmitting. COM1 receive is simultaneously selected when this key is pressed allowing received audio from the #1 COM receiver to be heard. COM2 receiver audio can be added by pressing the COM2 Key. When the PTT is active the annunciation will be flashing.
2	COM1	When selected, audio from the #1 COM receiver can be heard.
3	COM2 MIC	Selects the #2 transmitter for transmitting. COM2 receive is simultaneously selected when this key is pressed allowing received audio from the #2 COM receiver to be heard. COM1 receive can be selected by pressing the COM1 Key. When the PTT is active the annunciation will be flashing.

	Control Name	Description
④	COM2	When selected, audio from the #2 COM receiver can be heard.
⑤	AUX MIC	Not used in the Diamond DA40NG aircraft.
⑥	AUX	Not used in the Diamond DA40NG aircraft.
⑦	DME	Turns optional DME audio on or off.
⑧	NAV1	When selected, audio from the #1 NAV receiver can be heard.
⑨	ADF	Turns optional ADF receiver audio on or off.
⑩	NAV2	When selected, audio from the #2 NAV receiver can be heard.
⑪	PILOT ICS	Controls the pilot intercom system. Press and hold to enable/disable Bluetooth recording mode.
⑫	TEL	If equipped, selects/deselects the TEL audio source and assigns the Bluetooth device to the TEL audio. Press the TEL Key until the annunciation turns blue. The in-key annunciation will cycle from OFF to WHITE to BLUE. WHITE selects the wired audio source and BLUE selects the Bluetooth audio source.
⑬	COPLT ICS	Controls the copilot intercom system. Press and hold to enable/disable Bluetooth recording mode.
⑭	MUS1	Selects/Deselects the MUS1 audio source and assigns the Bluetooth device to the MUS1 audio. Press the MUS1 Key until the annunciation turns blue. The in-key annunciation will cycle from OFF to WHITE to BLUE. WHITE selects the wired audio source and BLUE selects the Bluetooth audio source. NOTE: The Bluetooth audio can only be assigned to one source at a time for each audio panel. Once the Bluetooth audio is assigned to an audio source, the remaining entertainment audio sources will only cycle between OFF and WHITE.
⑮	PASS ICS	Controls the passenger intercom system. Press and hold to enable/disable Bluetooth recording mode.
⑯	MUS2	Selects/Deselects the MUS2 audio source and can assign the Bluetooth device to the MUS2 audio. Press the MUS2 Key until the annunciation turns blue. The in-key annunciation will cycle from OFF to WHITE to BLUE. WHITE selects the wired audio source and BLUE selects the Bluetooth audio source. NOTE: The Bluetooth audio can only be assigned to one source at a time for each audio panel. Once the Bluetooth audio is assigned to an audio source, the remaining entertainment audio sources will only cycle between OFF and WHITE.
⑰	SPKR/PA	Selects/Deselects the cabin speaker. The selected COM transmitter is deselected when the SPKR/PA Key is pressed. Press and hold SPKR/PA Key for 2 seconds to select the PA system. When the PA is active the annunciation to the right of the SPKR/PA Key will be illuminated. The annunciation will flash when PA mode is active and the PTT is pressed.
⑱	MKR/MUTE	Selects marker beacon receiver audio. Mutes the currently received marker beacon receiver audio. Unmutes automatically when new marker beacon audio is received.
⑲	HI SENS	Press to increase marker beacon receiver sensitivity. Press again to return to low sensitivity.

	Control Name	Description
20	PLAY	Press once to play the last recorded COM audio. Press again while audio is playing and the previous block of recorded audio is played. Each subsequent press plays each previously recorded block. Recorded audio stops when receiving an audio transmission or when a push-to-talk (PTT) Key is pressed.
21	MAN SQ	Enables manual squelch for the intercom. When the intercom is active, push the VOL/SQ Knob to illuminate the squelch annunciation. Turn the VOL/SQ Knob to adjust squelch.
22	Volume/Squelch Indicator	Indicates volume/squelch setting relative to full scale.
23	Volume/Squelch (VOL/SQ) Control Knob	Turn the smaller knob to control volume or squelch of the selected source (indicated by the flashing white or blue annunciation). When the volume control cursor is not active push to switch to Blue-Select mode. If the volume control cursor is active, push twice (once to cancel the cursor, twice to activate Blue-Select mode). Push and hold for two seconds to enable the audio panel as discoverable for pairing. The Bluetooth Annunciation will flash to indicate the unit is discoverable. The unit will remain discoverable for 60 seconds or until a successful pair is established. Once a successful pairing is established, the Bluetooth Annunciation will stop flashing and turn solid blue and the audio "Bluetooth paired" is played.
24	Cursor (CRSR) Control Knob	Turn to move the cursor (flashing white or blue annunciation) to the desired source.
25	Bluetooth Connection Annunciation	A flashing cyan annunciation indicates the unit is discoverable. A solid blue annunciation indicates an active Bluetooth connection.
26	DISPLAY BACKUP Button	Manually selects Reversionary Mode.

4.2 COM OPERATION

COM TUNING BOXES

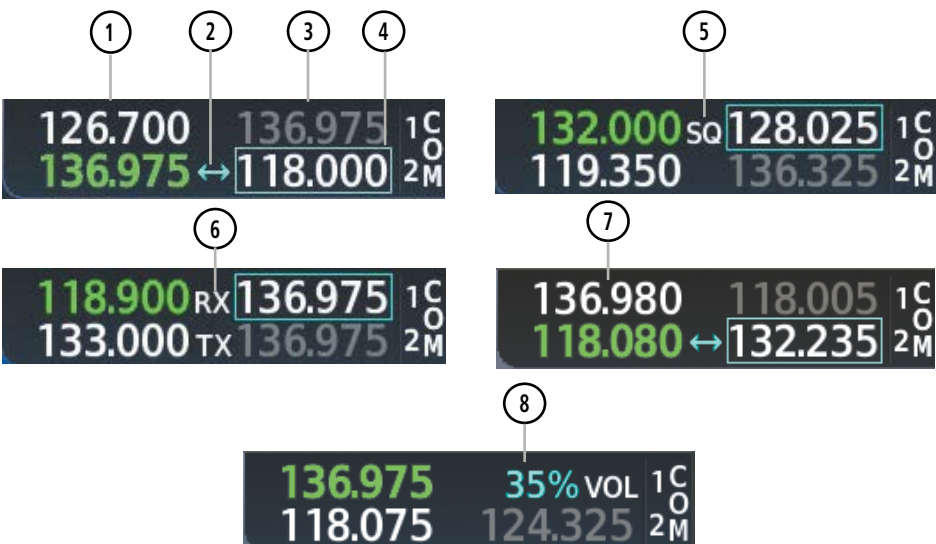


Figure 4-3 COM Tuning Box Indications

NOTE: When turning on the system for use, the system remembers the last frequencies used and the active COM transceiver state prior to shutdown.

#	Control Name	Description
①	Active Field	The COM Frequency Box is composed of four fields; the two active frequencies are on the left. An active COM frequency is displayed in green and indicates the COM transceiver is selected on the Audio Panel (COM1 MIC Key or COM2 MIC Key). Both active COM frequencies appearing in white indicate that no COM radio is selected for transmitting.
②	Frequency Transfer Arrow	Indicates which COM transceiver is selected for frequency transfer between the Standby and Active fields. Moves between the upper and lower radio frequency fields with the Frequency Tuning Box. Push the COM Knob to move the Frequency Transfer Arrow between the upper and lower radio frequency fields.

#	Control Name	Description
③	Standby Field	The COM Frequency Box is composed of four fields; the two standby frequencies are on the right. Frequencies in the standby field are displayed in either white or gray. The standby frequency in the tuning box is white. The other standby frequency is gray.
④	Frequency Tuning Box	Indicates which COM transceiver is to be tuned in the Standby Field. Moves between the upper and lower radio frequency fields with the Frequency Transfer Arrow. Moving the Frequency Tuning Box is accomplished by pushing the COM Knob on the PFD.
⑤	Automatic Squelch Indication	Indicates that Automatic Squelch is disabled. Automatic Squelch quiets unwanted static noise when no audio signal is received, while still providing good sensitivity to weak COM signals. When Automatic Squelch is disabled, COM audio reception is always on. Continuous static noise is heard over the headsets.
⑥	Transmit and Receive Indications	During COM transmission, a white TX appears by the active COM frequency replacing the Frequency Transfer Arrow. During COM signal reception, a white RX appears by the active COM frequency replacing the Frequency Transfer Arrow.
⑦	Frequency Spacing	The COM radios can tune either 25-kHz spacing (118.000 to 136.975 MHz) or 8.33-kHz spacing (118.000 to 136.990 MHz) for 760-channel or 3040-channel configuration. When 8.33-kHz channel spacing is selected, all of the 25-kHz channel spacing frequencies are also available in the complete 3040-channel list.
⑧	COM Volume	COM radio volume level can be adjusted from 0 to 100% using the VOL/SQ Knob. Turning the knob clockwise increases volume, turning the knob counterclockwise decreases volume. When adjusting volume, the level is displayed in place of the standby frequencies. Volume level indication remains for two seconds after the change.

COM TRANSCEIVER MANUAL TUNING

The COM frequency controls and frequency boxes are on the right side of the MFD and PFD.

Manually tuning a COM frequency:

- 1) Turn the **COM** Knob to tune the desired frequency (large knob for MHz; small knob for kHz).
- 2) Press the Frequency Transfer Key to transfer the frequency to the active field.
- 3) Adjust the volume level with the COM **VOL/SQ** Knob.
- 4) Push the COM **VOL/SQ** Knob to turn automatic squelch on and off.

AUTO-TUNING THE COM FREQUENCY

COM frequencies can be automatically tuned from the following:

- 'Nearest Airports' Window (PFD)
- 'NRST – Nearest Frequencies' Page
- 'WPT – Airport Information' Page
- 'NRST – Nearest Airspaces' Page
- 'NRST – Nearest Airports' Page

AUTO-TUNING FROM THE PFD

COM frequencies for the nearest airports can be automatically tuned from the 'Nearest Airports' Window on the PFD. When the desired frequency is entered, it becomes a standby frequency. Pressing the **Frequency Transfer** Key places this frequency into the COM Active Frequency Field.

Auto-tuning a COM frequency for a nearby airport from the PFD:

- 1) Press the **Nearest** Softkey on the PFD to open the 'Nearest Airports' Window. A list of 25 nearest airport identifiers and COM frequencies is displayed.
- 2) Turn the **FMS** Knob to scroll through the list and highlight the desired COM frequency.
- 3) Press the **ENT** Key to load the COM frequency into the COM Standby Frequency Field.
- 4) Press the **Frequency Transfer** Key to transfer the frequency to the COM Active Frequency Field



Press the **Nearest** Softkey to Open the Nearest Airports Window

Figure 4-4 Nearest Airports Window (PFD)

AUTO-TUNING FROM THE MFD

Frequencies can be automatically loaded into the COM Frequency Box from pages in the NRST or WPT page group by highlighting the frequency and pressing the **ENT** Key.

Auto-tuning a COM frequency from the WPT and NRST Pages:

- 1) From any page the COM frequency can be auto-tuned, activate the cursor by pushing the **FMS** Knob or pressing the appropriate softkey.
- 2) Turn the large **FMS** Knob to place the cursor on the desired COM frequency.
- 3) Press the **ENT** Key to display the 'Load Frequency' Window.
- 4) Turn the **FMS** Knob to select the desired COM1 or COM2 active or standby location.
- 5) Press the **ENT** Key to load the frequency.




Figure 4-5 'Load Frequency' Window

Or:

- 1) Press the **MENU** Key to display the 'Page Menu' Window.
- 2) Turn the **FMS** Knob to scroll through the menu options.
- 3) Press the **ENT** Key to place the cursor on the desired selection.
- 4) Turn the **FMS** Knob to scroll through the frequency selections.
- 5) Press the **ENT** Key to display the 'Load Frequency' Window.
- 6) Turn the **FMS** Knob to select the desired COM1 or COM2 active or standby location.
- 7) Press the **ENT** Key to load the frequency.

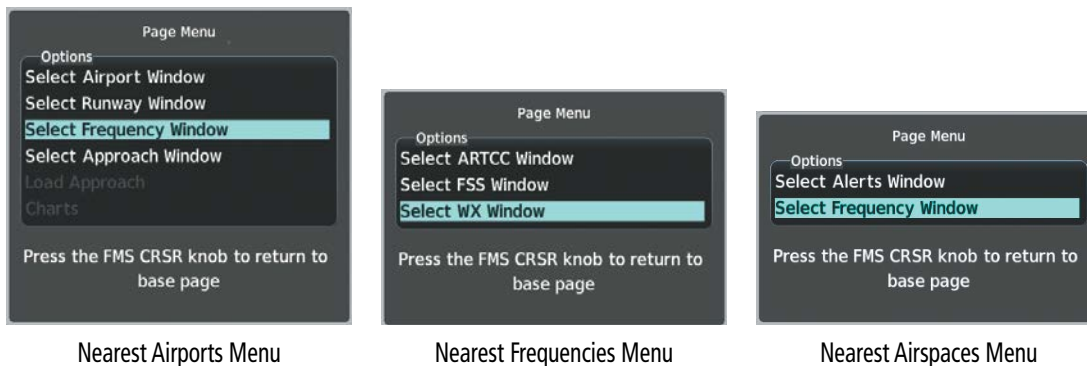


Figure 4-6 Nearest Pages Menus

On the 'WPT - Airport Information' Page, the cursor can be placed on the frequency field by pushing the **FMS** Knob and scrolling through the list. The frequency is transferred to the COM Standby Field with the **ENT** Key. The frequency can be transferred to the desired COM field by pressing the **ENT** Key to bring up the 'Load Frequency' Window, selecting the desired COM field, and pressing the **ENT** Key again.

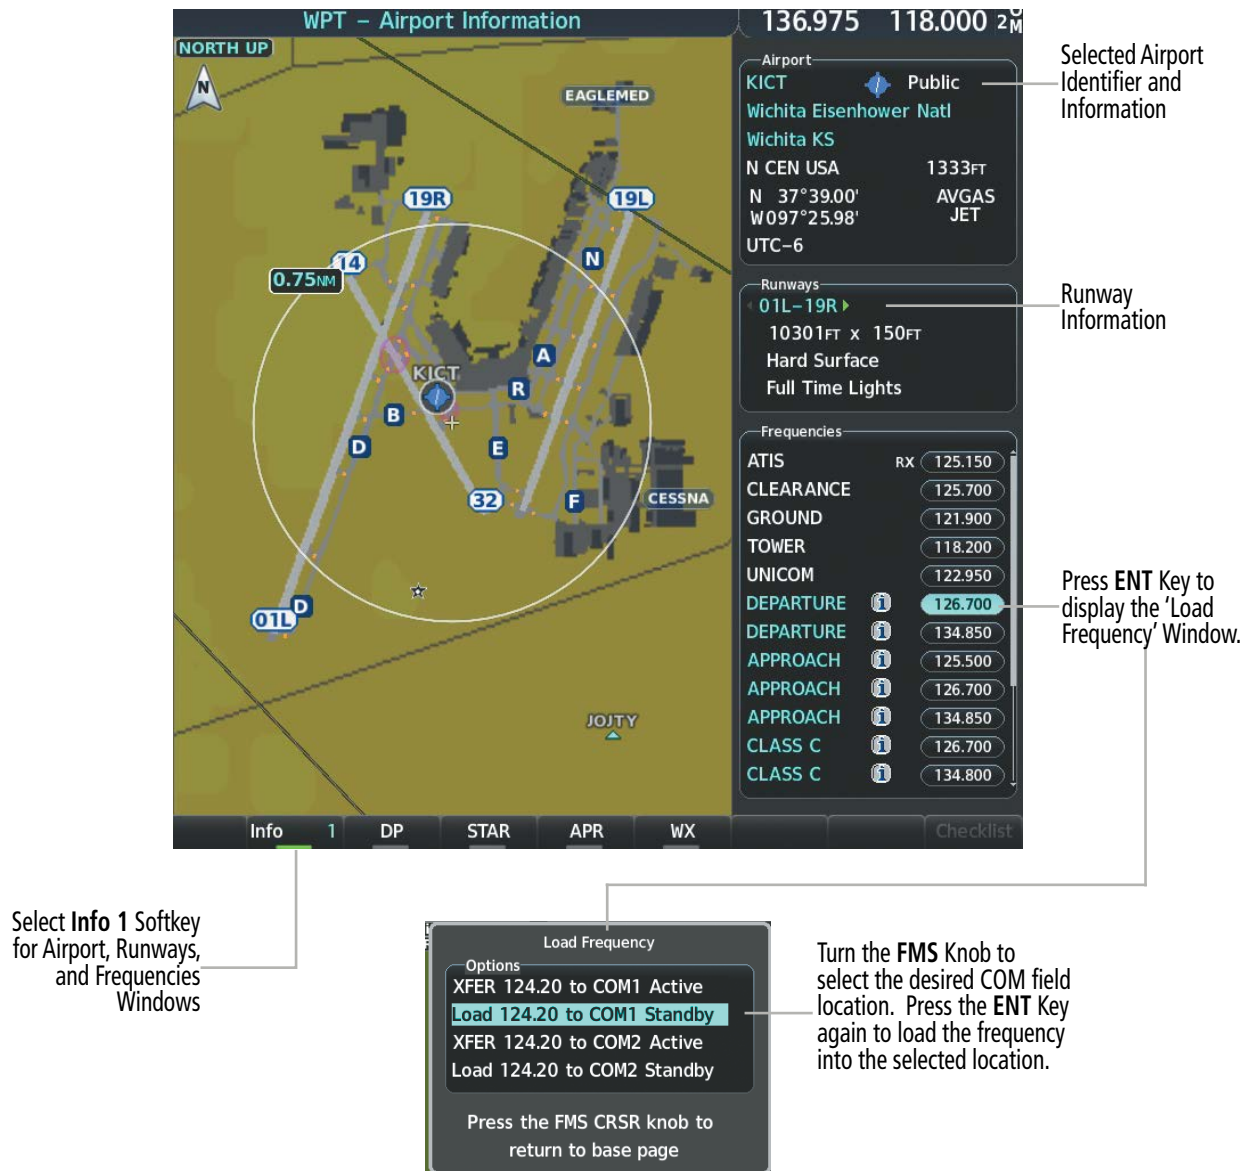


Figure 4-7 'WPT - Airport Information' Page

COM frequencies can also be auto-tuned from the 'NRST - Nearest Airspaces', 'NRST - Nearest Frequencies', and 'NRST - Nearest Airports' Pages on the MFD in a similar manner using the appropriate softkeys or **MENU** Key, the **FMS** Knob, and the **ENT** Key.

FREQUENCY SPACING


The COM radios can tune either 25-kHz spacing (118.000 to 136.975 MHz) or 8.33-kHz spacing (118.000 to 136.990 MHz) for 760-channel or 3040-channel configuration. When 8.33-kHz channel spacing is selected, all of the 25-kHz channel spacing frequencies are also available in the complete 3040-channel list.

COM channel spacing is set on the System Setup 1 Page of the Aux Page Group.

Changing COM frequency channel spacing:

- 1) From the 'Aux – System Setup 1' Page.
- 2) Press the **FMS** Knob to activate the flashing cursor.
- 3) Turn the large **FMS** Knob to highlight the Channel Spacing Field in the 'COM Configuration' Box.
- 4) Turn the small **FMS** Knob to select the desired channel spacing.
- 5) Press the **ENT** Key to complete the channel spacing selection.

While the COM Configuration Window is selected, the softkeys are blank.

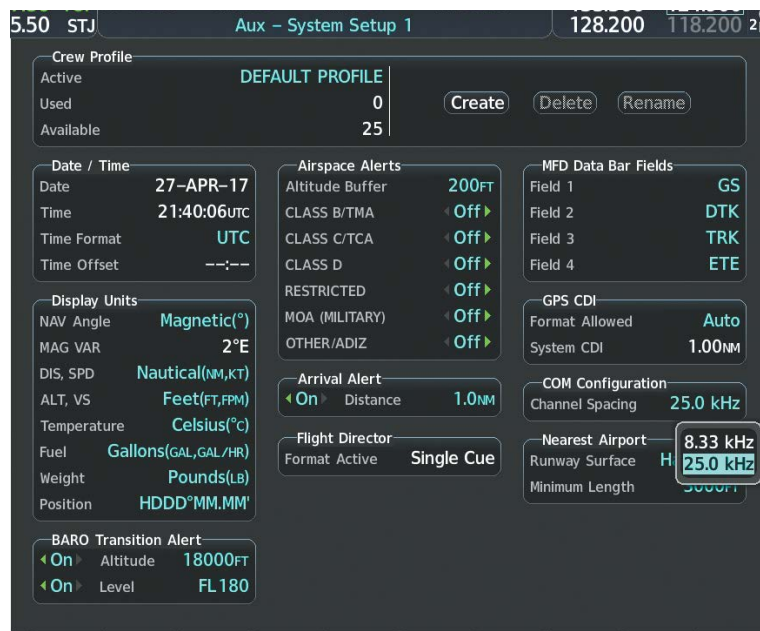

Select 8.33-kHz or 25.0-kHz COM Frequency Channel Spacing

Figure 4-8 'Aux – System Setup 1' Page

4.3 NAV OPERATION

NAV TUNING BOXES

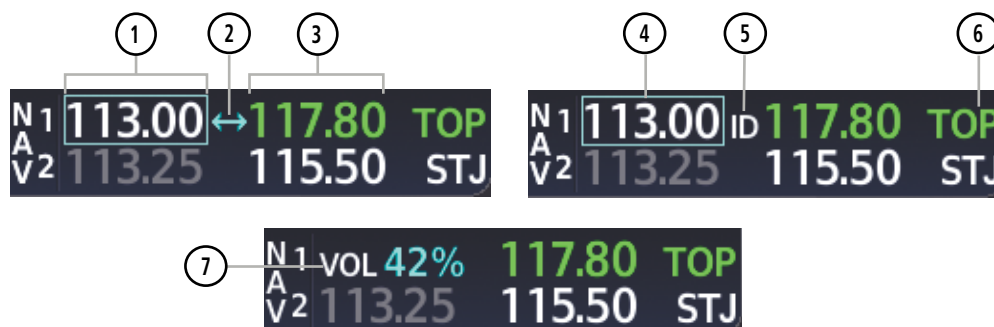


Figure 4-9 NAV Tuning Box Indications

#	Control Name	Description
①	Standby Fields	The NAV Frequency Box is composed of four fields; the two standby frequencies are on the left. Frequencies in the standby field are displayed in either white or gray. The standby frequency in the tuning box is white. The other standby frequency is gray.
②	Frequency Transfer Arrow	Indicates which NAV receiver is selected for frequency transfer between the Standby and Active fields. Push the NAV Knob to move the Frequency Transfer Arrow between the upper and lower radio frequency fields.
③	Active Fields	The NAV Frequency Box is composed of four fields; the two active frequencies are on the right. An active NAV frequency is displayed in green. The active NAV radio is selected by pressing the CDI Softkey on the PFD. Both active NAV frequencies appearing in white indicate that no NAV radio is selected.
④	NAV Tuning Box	Indicates which NAV transceiver is to be tuned in the Standby Field. Push the NAV Knob to move the Frequency Tuning Box between the upper and lower radio frequency fields.
⑤	VOR/LOC Morse Code Audio Indication	When the Morse code identifier audio is selected for a NAV radio, a white ID replaces the Frequency Transfer Arrow to the left of the active NAV frequency. To listen to a station identifier, press the NAV1 or NAV2 Key on the Audio Panel. Pushing the VOL/ID Knob turns on/off the Morse code audio only in the radio with the NAV Tuning Box. To turn on/off both NAV IDs, transfer the NAV Tuning Box between NAV1 and NAV2 by pushing the NAV Knob and pushing the VOL/ID Knob again to turn the Morse code off in the other radio.
⑥	Decoded Morse Code Station Identifier	The NAV Frequency Box displays the decoded Morse Code station identifier that is received from the navigation source. Audio verification of the selected station identifier can be accomplished by selecting the corresponding NAV radio on the audio panel and pushing the NAV VOL/ID Knob.
⑦	NAV Volume	NAV radio volume level can be adjusted from 0 to 100% using the VOL/SQ Knob. Turning the knob clockwise increases volume, turning the knob counterclockwise decreases volume. When adjusting volume using the PFD or MFD VOL/SQ Knob, the level is displayed in place of the standby frequencies. Volume level indication remains for two seconds after the change.

NAV RADIO SELECTION AND ACTIVATION

The NAV Frequency Box is composed of four fields; two standby fields and two active fields. The active frequencies are on the right side and the standby frequencies are on the left.

A NAV radio is selected for navigation by pressing the **CDI** Softkey located on the PFD. The active NAV frequency selected for navigation is displayed in green. Pressing the **CDI** Softkey once selects NAV1 as the navigation radio. Pressing the **CDI** Softkey a second time selects NAV2 as the navigation radio. Pressing the **CDI** Softkey a third time activates GPS mode. Pressing the **CDI** Softkey again cycles back to NAV1.

While cycling through the **CDI** Softkey selections, the selected NAV standby frequency is selected for tuning, the Frequency Transfer Arrow is placed in the selected NAV Frequency Field, and the active NAV frequency color changes to green.

The three navigation modes that can be cycled through are:

- VOR1 (or LOC1) – If NAV1 is selected, a green single line arrow (not shown) labeled either VOR1 or LOC1 is displayed on the HSI and the active NAV1 frequency is displayed in green.
- VOR2 (or LOC2) – If NAV2 is selected, a green double line arrow (shown) labeled either VOR2 or LOC2 is displayed on the HSI and the active NAV2 frequency is displayed in green.
- GPS – If GPS Mode is selected, a magenta single line arrow (not shown) appears on the HSI and neither NAV radio is selected. Both active NAV frequencies are then displayed in white and the previously selected NAV standby frequency remains selected for tuning.

See the Flight Instruments Section for selecting the DME and Bearing Information windows and using VOR or ADF as the source for the bearing pointer.

The NAV Frequency Box displays the decoded Morse Code station identifier that is received from the navigation source. Audio verification of the selected station identifier is still required, and can be accomplished by selecting the corresponding NAV radio on the audio panel and pressing the **NAV VOL/ID** Knob.

NAV radios are selected for listening by pressing the corresponding keys on the Audio Panel. Pressing the **NAV1**, **NAV2**, **ADF**, or **DME** Key selects and deselects the navigation radio source. Selected audio can be heard over the headset and the speakers (if selected). All radios can be selected individually or simultaneously.

NAV RECEIVER MANUAL TUNING

The NAV frequency controls and frequency boxes are on the left side of the MFD and PFD.

Manually tuning a NAV frequency:

- 1) Turn the **NAV** Knob to tune the desired frequency in the NAV Tuning Box.
- 2) Press the **Frequency Transfer** Key to transfer the frequency to the NAV Active Frequency Field.
- 3) Adjust the volume level with the **NAV VOL/ID** Knob.
- 4) Press the **NAV VOL/ID** Knob to turn the Morse code identifier audio on and off.

AUTO-TUNING FROM THE MFD

NAV frequencies can be selected and loaded from the following MFD pages:

- WPT – Airport Information
- NRST – Nearest Airports
- NRST – Nearest Frequencies (FSS, WX)
- WPT – VOR Information
- NRST – Nearest VOR
- NRST – Nearest Airspaces

The MFD provides auto-tuning of NAV frequencies from waypoint and nearest pages. During enroute navigation, the NAV frequency is entered automatically into the NAV standby frequency field. During approach activation the NAV frequency is entered automatically into the NAV active frequency field.

Frequencies can be automatically loaded into the NAV Frequency Box from pages in the NRST or WPT page group by highlighting the frequency and pressing the **ENT** Key.

Auto-tuning a NAV frequency from the WPT and NRST Pages:

- 1) From any page the NAV frequency can be auto-tuned, activate the cursor by pushing the **FMS** Knob or the appropriate softkey.
- 2) Turn the **FMS** Knob to place the cursor on the desired NAV identifier or NAV frequency.
- 3) On the Nearest VOR and Nearest Airports pages, press the **FREQ** Softkey to place the cursor on the NAV frequency.
- 4) Press the **ENT** Key to display the 'Load Frequency' Window.
- 5) Turn the **FMS** Knob to place the cursor on the desired NAV frequency field.
- 6) Press the **ENT** Key to load the NAV frequency into the selected NAV frequency field.




Figure 4-10 'Load Frequency' Window

Or:

- 1) When on the NRST pages, press the **MENU** Key on the MFD to display the 'Page Menu' Window.
- 2) Turn the large **FMS** Knob to scroll through the menu options.
- 3) Press the **ENT** Key to place the cursor in the desired window.
- 4) Turn the **FMS** Knob to scroll through the frequency selections.
- 5) Press the **ENT** Key to display the 'Load Frequency' Window.
- 6) Turn the **FMS** Knob to select the desired NAV1 or NAV2 active or standby location.
- 7) Press the **ENT** Key to load the frequency into the selected NAV frequency field.

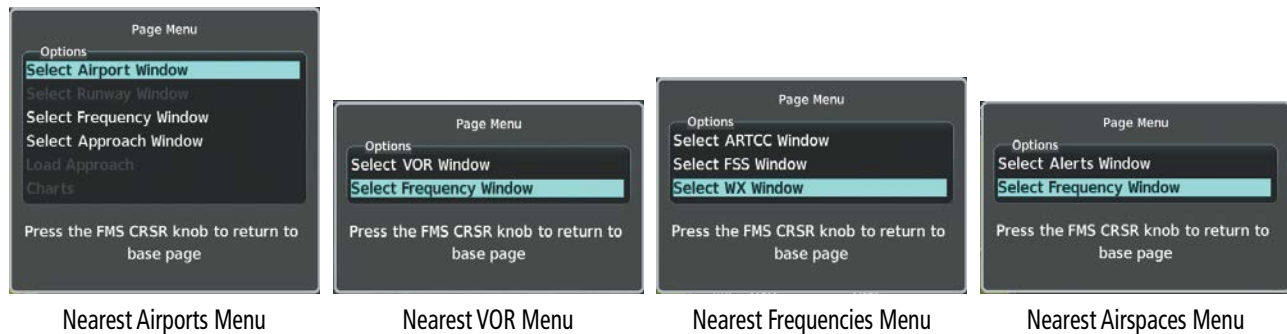


Figure 4-11 Nearest Pages Menus

In the example shown, the VOR list is selected with the **VOR** Softkey or from the page menu. The **FMS** Knob or **ENT** Key is used to scroll through the list. The cursor is placed on the frequency with the **FREQ** Softkey and loaded into the NAV Tuning Box with the **ENT** Key.



Figure 4-12 Loading a NAV Frequency from the 'NRST - Nearest VOR' Page

While enroute, NAV frequencies can also be auto-tuned from the 'NRST - Nearest Airports', 'WPT - Airport Information', 'WPT - VOR Information', and 'NRST - Nearest Frequencies' Pages on the MFD in a similar manner using the appropriate softkeys or **MENU** Key, the **FMS** Knob, and the **ENT** Key.

AUTO-TUNING NAV FREQUENCIES ON APPROACH ACTIVATION

- NOTE:** The primary NAV frequency is auto-tuned upon loading a VOR or ILS/Localizer approach.
- NOTE:** When an ILS/LOC approach has been activated with FMS selected as the CDI navigation source, the system switches to NAV Mode as the final approach course is intercepted (within 15 nm of the FAF). See the Flight Management Section for details.
- NOTE:** In some circumstances, the G1000 NXi system may auto-tune an unintended course for a given localizer frequency because it shares the same frequency with another nearby localizer facility. Always verify auto-tuned courses and frequencies with FAA published data and manually correct if required.

NAV frequencies are automatically loaded into the NAV Tuning Box upon approach activation. When loading or activating a VOR or ILS/LOC approach, the approach frequency is automatically transferred to a NAV frequency field as follows:

	If the Current CDI NAV Source is NAV1 or NAV2	If the Current CDI NAV Source is FMS
Approach LOADED	Approach frequency is transferred to the standby frequency field of the current CDI NAV source and to the active frequency field of the non-selected CDI Nav source.	The approach frequency is transferred to the NAV1 and NAV2 active frequency fields and the previously active frequencies are transferred to standby. If the approach frequency was already in the NAV1 or NAV2 standby frequency field, the standby frequency is transferred to active.
Approach ACTIVATED	Approach frequency is transferred to the active frequency field on both NAV1 and NAV2 and the previously active frequencies are transferred to standby.	

Table 4-1 Approach Frequency Automatic Transfers

MARKER BEACON RECEIVER

- NOTE:** The marker beacon indicators operate independently of marker beacon audio and cannot be turned off.

The marker beacon receiver is used as part of an ILS. The marker beacon receiver is always on and detects any marker beacon signals within the reception range of the aircraft.

The receiver detects the three marker tones – outer, middle, and inner – and provides the marker beacon annunciations located to the left of the Altimeter on the PFD.



Figure 4-13 Marker Beacon Keys

The Audio Panels provide three different states of marker beacon operation; On, Muted, and Deselected. Pressing the **MKR/MUTE** Key selects and deselects marker beacon audio. The key annunciator indicates when marker beacon audio is selected.

During marker beacon audio reception, pressing the **MKR/MUTE** Key mutes the audio but does not affect the marker annunciations. The marker tone is silenced, then waits for the next marker tone. The **MKR/MUTE** Key Annunciator is illuminated, indicating audio muting. The audio returns when the next marker beacon signal is received. If the **MKR/MUTE** Key is pressed during signal reception (O, M, I indication) while marker beacon audio is muted, the audio is deselected and the **MKR/MUTE** Key Annunciator is extinguished.

Pressing the **HI SENS** Key switches between high and low marker beacon receiver sensitivity. The HI SENS function (annunciator illuminated) is used to provide an earlier indication when nearing a marker during an approach. The LO SENS function (annunciator extinguished) results in a narrower marker dwell while over a station.

ADF/DME



NOTE: When another auxiliary window is turned on, the ADF/DME Tuning Window is replaced on the PFD.

See the Flight Instruments Section for displaying the DME and bearing information windows (ADF) and using the ADF as the source for the bearing pointer.

The system tunes the ADF receiver (optional) and DME transceiver (optional). The ADF is tuned by entering the frequency in the ADF standby frequency field of the 'ADF/DME Tuning' Window. (The softkey may be labeled **ADF/DME**, **ADF**, or **DME**, depending on installed equipment.)

The UHF DME frequency is tuned by pairing with a VHF NAV frequency. DME frequency pairing is automatic and only the VHF NAV frequency is shown.

The following ADF/DME information is displayed in the 'ADF/DME Tuning' Window:

- Active and standby ADF frequencies
- ADF receiver mode
- ADF receiver volume
- DME tuning mode (DME transceiver pairing)

When the 'ADF/DME Tuning' Window is displayed, the selection cursor is placed over the standby ADF frequency field.

Turning the large **FMS** Knob moves the selection cursor through the various fields (standby ADF frequency, ADF receiver mode, ADF radio volume, and DME tuning mode). Pressing the **FMS** Knob activates/deactivates the selection cursor in the 'ADF/DME Tuning' Window. The ADF frequency is entered using the **FMS** Knob and the **ENT** Key.

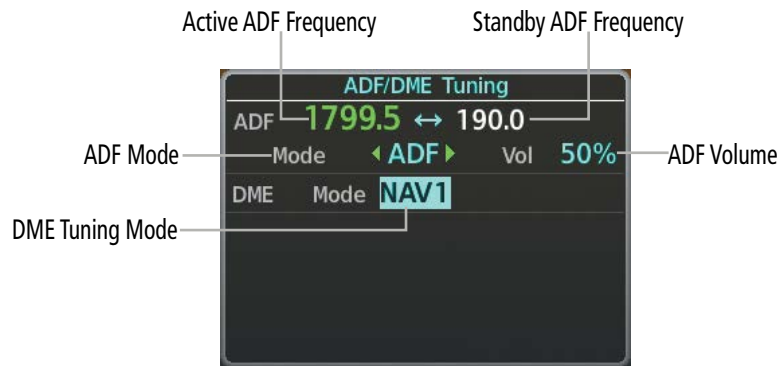


Figure 4-14 ADF/DME Tuning Window

ADF TUNING

ADF frequencies in the 190.0-kHz to 1799.5-kHz range are entered in the standby ADF frequency field of the 'ADF/DME Tuning' Window. The system does not tune the ADF emergency frequency, 2182.0-kHz.

Tuning an ADF frequency:

- 1) Press the **ADF/DME** Softkey to display the 'ADF/DME Tuning' Window.
- 2) Turn the large **FMS** Knob to place the selection cursor over the standby ADF frequency field.
- 3) Turn the small **FMS** Knob to begin data entry and change each digit.
- 4) Turn the large **FMS** Knob to move the cursor to the next digit position.
- 5) Press the **ENT** Key to complete data entry for the standby frequency.

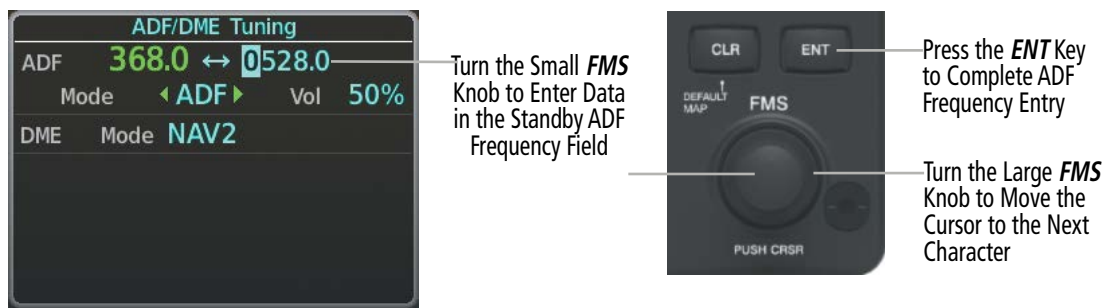


Figure 4-15 Entering ADF Standby Frequencies

Pressing the **CLR** Key before completing frequency entry cancels the frequency change and reverts back to the previously entered frequency.

Pressing the **CLR** Key when the cursor is flashing, clears the frequency and replaces the standby field with 0000.0.

Transferring the active and standby ADF frequencies:

- 1) Turn the large **FMS** Knob to place the selection cursor over the standby ADF frequency field.
- 2) Press the **ENT** Key to complete the frequency transfer.

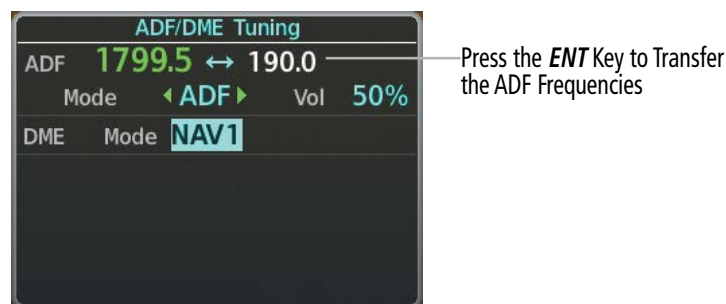


Figure 4-16 Transferring ADF Frequencies

SELECTING ADF RECEIVER MODE

The following modes can be selected: (In all modes NDB audio can be heard by selecting the **ADF** Key on the Audio Panel.)

- » ANT (Antenna) – The ADF bearing pointer is removed. Best mode for listening to NDB audio.
- » ADF (Automatic Direction Finder) – The ADF pointer points to the relative bearing of the NDB station.
- » ADF/BFO (ADF/Beat Frequency Oscillator) – The ADF pointer points to the relative bearing of the NDB station and an audible tone confirms signal reception. This mode allows identification of the interrupted carrier beacon stations used in various parts of the world.
- » ANT/BFO (Antenna/Beat Frequency Oscillator) – The ADF pointer points to the relative bearing of the NDB station and an audible tone confirms signal reception. This mode also allows identification of the interrupted carrier beacon stations and confirms signal reception.

Selecting an ADF receiver mode:

- 1) Turn the large **FMS** Knob to place the selection cursor over the ADF mode field.
- 2) Turn the small **FMS** Knob to select the desired ADF receiver mode.

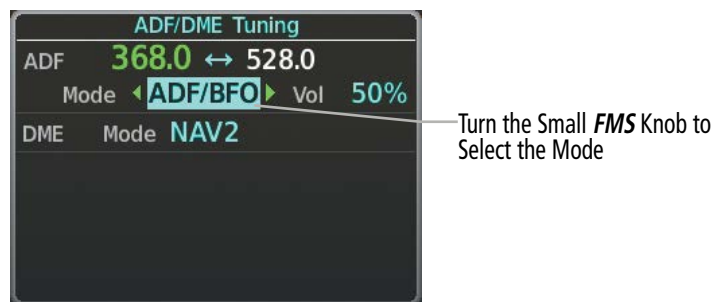


Figure 4-17 Selecting ADF Receiver Mode

ADF receiver volume level can be adjusted in the tuning window from 0 to 100%. The default volume level is set to 50%. The ADF volume level is the same for both Audio Panels.

Adjusting ADF receiver volume:

- 1) Turn the large **FMS** Knob to place the selection cursor over the ADF volume field.
- 2) Turn the small **FMS** Knob to adjust volume as desired.

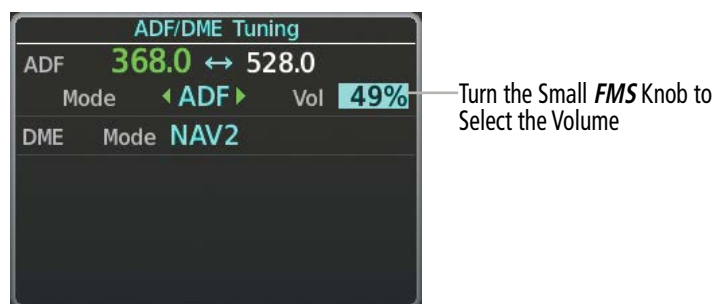


Figure 4-18 Adjusting ADF Receiver Volume

DME TUNING



NOTE: When turning on the G1000 NXi for use, the system remembers the last frequency used for DME tuning and the NAV1, NAV2, or HOLD state prior to shutdown.

The system tunes the optional DME transceiver. The UHF DME frequency is tuned by pairing with a VHF NAV frequency. DME frequency pairing is automatic and only the VHF NAV frequency is shown.

The DME Tuning Window is located to the right of the HSI in the lower right corner of the PFD. The DME transceiver is tuned by selecting NAV1, NAV2, or HOLD in the DME Tuning Window. Pressing the **DME** Softkey switches the DME Tuning Window on and off.

The following DME transceiver pairing can be selected:

- NAV1 – Pairs the DME frequency from the selected NAV1 frequency.
- NAV2 – Pairs the DME frequency from the selected NAV2 frequency.
- HOLD – When in the HOLD position, the DME frequency remains paired with the last selected NAV frequency.

Selecting DME transceiver pairing:

- 1) Press the **ADF/DME** or **DME** Softkey to display the 'ADF/DME Tuning' Window.
- 2) Turn the small **FMS** Knob to select the DME tuning mode.
- 3) Press the **ENT** Key to complete the selection.

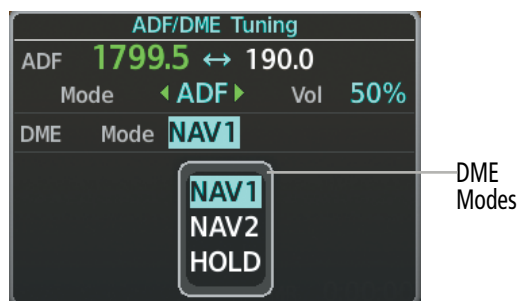


Figure 4-19 ADF/DME Tuning Window, DME Modes

Pressing the **CLR** Key or **FMS** Knob while in the process of DME pairing cancels the tuning entry and reverts back to the previously selected DME tuning state. Pressing the **FMS** Knob activates/deactivates the cursor in the 'ADF/DME Tuning' Window.

See the Flight Instruments Section for displaying the DME information window.

4.4 MODE S TRANSPONDER

The Mode S Transponder provides Mode A, Mode C, and Mode S interrogation and reply capabilities. Selective addressing or Mode Select (Mode S) capability includes the following features:

- Level-2 reply data link capability (used to exchange information between aircraft and ATC facilities)
- Surveillance identifier capability
- Flight ID (Flight Identification) reporting – The Mode S Transponder reports aircraft identification as either the aircraft registration or a unique Flight ID.
- Altitude reporting
- Airborne status determination
- Transponder capability reporting
- Mode S Enhanced Surveillance (EHS) requirements
- Acquisition squitter – Acquisition squitter, or short squitter, is the transponder 24-bit identification address. The transmission is sent periodically, regardless of the presence of interrogations. The purpose of acquisition squitter is to enable Mode S ground stations and aircraft equipped with a Traffic Avoidance System (TAS) to recognize the presence of Mode S-equipped aircraft for selective interrogation.
- Extended squitter – The extended squitter is transmitted periodically and contains information such as altitude (barometric and GPS), GPS position, and aircraft identification. The purpose of extended squitter is to provide aircraft position and identification to ADS-B Ground-Based Transceivers (GBTs) and other aircraft.

The Hazard Avoidance Section provides more details on traffic avoidance systems.

TRANSPONDER CONTROLS

Transponder function is displayed on three levels of softkeys on the PFD: Top-level, Mode Selection, and Code Selection. When the top-level **XPDR** Softkey is pressed, the Mode Selection softkeys appear: **Standby, On, ALT, VFR, Code, Ident, Back**.

When the **Code** Softkey is pressed, the number softkeys appear: **0, 1, 2, 3, 4, 5, 6, 7, Ident, BKSP, Back**. The digits 8 and 9 are not used for code entry. Pressing the numbered softkeys in sequence enters the transponder code. If an error is made, pressing the **BKSP** Softkey moves the code selection cursor to the previous digit. Pressing the **BKSP** Softkey again moves the cursor to the next previous digit.

Pressing the **Back** Softkey during code selection reverts to the Mode Selection Softkeys. Pressing the **Back** Softkey during mode selection reverts to the top-level softkeys.

The code can also be entered with the **FMS** Knob on either PFD. Code entry must be completed with either the softkeys or the **FMS** Knob, but not a combination of both.

Pressing the **Ident** Softkey while in Mode or Code Selection initiates the ident function and reverts to the top-level softkeys.

After 45 seconds of transponder control inactivity, the system reverts back to the top-level softkeys.

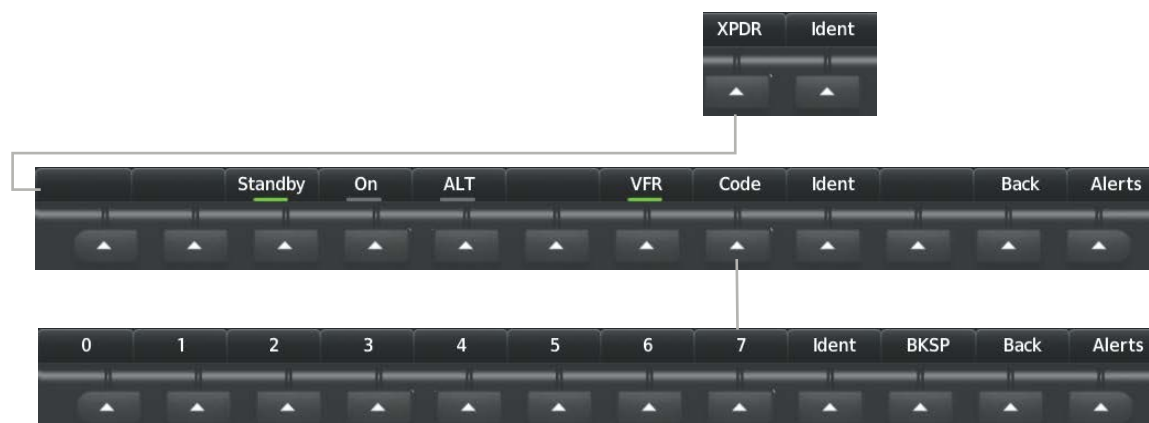


Figure 4-20 XPDR Softkeys (PFD)

TRANSPONDER MODE SELECTION

Mode selection can be automatic (Altitude Mode) or manual (Standby, ON, and Altitude Modes). The **Standby**, **On**, and **ALT** Softkeys can be accessed by pressing the **XPDR** Softkey.

Selecting a transponder mode:

- 1) Press the **XPDR** Softkey to display the Transponder Mode Selection Softkeys.
- 2) Press the desired softkey to activate the transponder mode.

STANDBY MODE (MANUAL)



NOTE: In Standby Mode, the IDENT function is inhibited.

Standby Mode can be selected at any time by pressing the **Standby** Softkey. In Standby, the transponder is powered and new codes can be entered, but no replies or squitters are transmitted.. When Standby is selected, a white STBY indication and transponder code appear in the mode field of the Transponder Data Box.

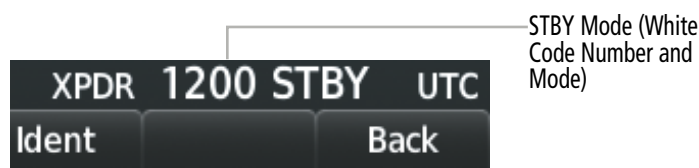


Figure 4-21 Standby Mode

MANUAL ON MODE

On Mode can be selected at any time by pressing the **On** Softkey. An On indication will appear in the mode field of the Transponder Data Box. Selecting On mode enables transmission of transponder replies and squitters, but transmissions will not include altitude information. The On indication and transponder code in the Transponder Data Box will appear green while airborne and white while on the ground. When the transponder is operating with an air state of on-ground it will disable replies to Mode A, Mode C, and Mode S all-call interrogations so the aircraft will not show up on the traffic systems of other aircraft.

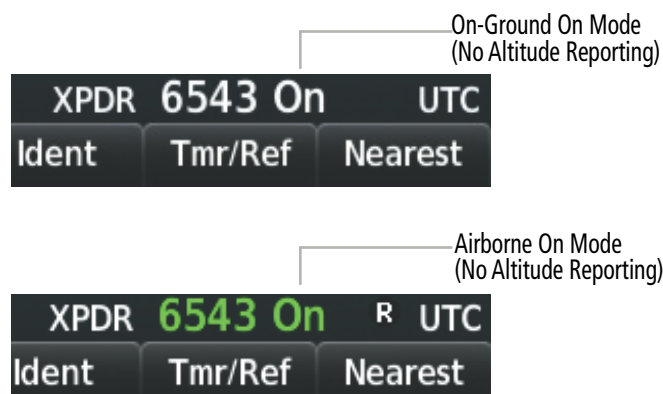


Figure 4-22 On Mode

ALTITUDE MODE (AUTOMATIC OR MANUAL)

ALT Mode can be selected at any time by pressing the **ALT** Softkey. When ALT mode is selected, an ALT indication will appear in the mode field of the Transponder Data Box. Selecting ALT mode enables transmission of transponder replies and squitters. Transmissions will include pressure altitude information. The ALT indication and transponder code in the Transponder Data Box will appear green while airborne and white while on the ground. When the transponder is operating with an air state of on-ground it will disable replies to Mode A, Mode C, and Mode S all-call interrogations so the aircraft will not show up on the traffic systems of other aircraft.

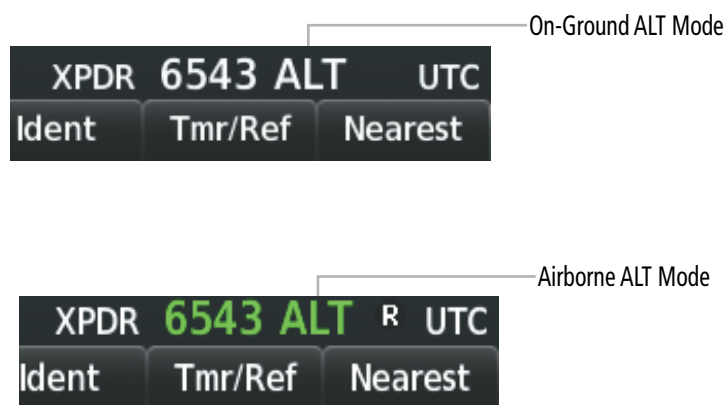


Figure 4-23 Altitude Mode

REPLY STATUS

When the transponder sends replies to interrogations, a white R indication appears momentarily in the reply status field of the Transponder Data Box.

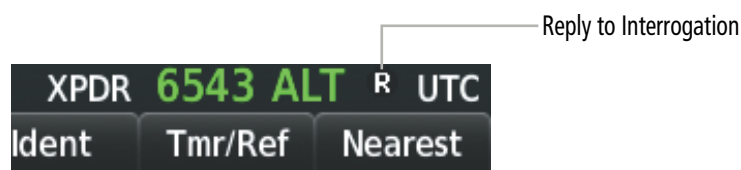


Figure 4-24 Reply Indication

VFR CODE

The VFR code can be entered either manually or by pressing the **XPDR** Softkey, then the **VFR** Softkey. When the **VFR** Softkey is pressed, the pre-programmed VFR code is automatically displayed in the code field of the Transponder Data Box. Pressing the **VFR** Softkey again restores the previous identification code.

The pre-programmed VFR Code is set at the factory to 1200. If a VFR code change is required, contact a Garmin-authorized service center for configuration.

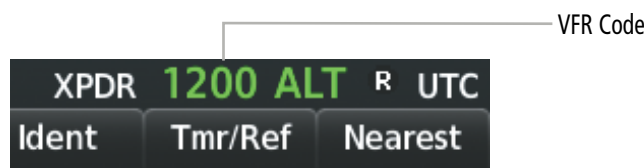


Figure 4-25 VFR Code

ENTERING A TRANSPONDER CODE

Entering a transponder code with softkeys:

- 1) Press the **XPDR** Softkey to display the Transponder Mode Selection Softkeys.
- 2) Press the **Code** Softkey to display the Transponder Code Selection Softkeys, for digit entry.
- 3) Press the digit softkeys to enter the code in the code field. When entering the code, the next softkey in sequence must be pressed within 10 seconds, or the entry is cancelled and restored to the previous code. Press the **BKSP** Softkey to move the code selection cursor to the previous digit. Five seconds after the fourth digit has been entered, the transponder code becomes active.

Entering a transponder code with the PFD FMS Knob:

- 1) Press the **XPDR** and the **Code** Softkeys as in the previous procedure to enable code entry.
- 2) Turn the small **FMS** Knob on the PFD to enter the first two code digits.
- 3) Turn the large **FMS** Knob to move the cursor to the next code field.
- 4) Enter the last two code digits with the small **FMS** Knob.
- 5) Press the **ENT** Key to complete code digit entry.

Pressing the **CLR** Key or small **FMS** Knob before code entry is complete cancels code entry and restores the previous code. Waiting for 10 seconds after code entry is finished activates the code automatically.

IDENT FUNCTION



NOTE: In Standby Mode, the **Ident** Softkey is inoperative.

Pressing the **Ident** Softkey sends a distinct identity indication to Air Traffic Control (ATC). The indication distinguishes the identifying transponder from all the others on the air traffic controller's screen. The **Ident** Softkey appears on all levels of transponder softkeys. When the **Ident** Softkey is pressed, a green Ident indication is displayed in the mode field of the Transponder Data Box for a duration of 18 seconds.

After the **Ident** Softkey is pressed while in Mode or Code Selection, the system reverts to the top-level softkeys.



Figure 4-26 Ident Softkey and Indication

4.5 ADDITIONAL AUDIO PANEL FUNCTIONS

POWER APPLICATION

The Audio Panel perform a self-test at power application. During the self-test all Audio Panel annunciation lights illuminate for approximately two seconds. Once the self-test is completed, most of the settings are restored to those in use before the unit was last turned off. The exceptions are the speaker and intercom, which are always selected at power application.

MONO/STEREO HEADSETS

Stereo headsets are recommended for use in this aircraft. Using a monaural headset in a stereo jack shorts the right headset channel output to ground. While this does not damage the Audio Panel, a person listening on a monaural headset hears only the left channel in both ears. If a monaural headset is used at one of the passenger positions, any other passenger using a stereo headset hears audio in the left ear only.

3D AUDIO

3D Audio is useful when multiple COM audio sources are present. By using different responses in each ear, 3D audio processing creates spatial separation from each audio source, aiding in the distinction of which audio source the pilot is hearing.

Because this feature uses different signals for left and right channels, it requires wiring for stereo intercom and stereo headsets. If an aircraft is not wired to support stereo headsets, or the crew does not use stereo headsets, then COMs audio will be distributed to both ears regardless of the 3D audio functionality selection.

With a single COM selected and 3D Audio enabled, the listener hears the audio source at the 12 o'clock position. If both COMs are selected, the listener hears COM1 at 11 o'clock and COM2 at the 1 o'clock position. The scope of 3D audio is limited to COM audio for the pilot and copilot stations. All other audio (alerts, side-tones, intercom, etc.) are distributed equally to both ears.

Pilot and copilot 3D audio can be enabled or disabled. When 3D Audio is enabled, the aural message "3D audio left" is heard in the left ear followed by "3D audio right" in the right ear. The 3D audio left and right reference can be changed using the Left-Right Swap function. This allows pilots to use their headset microphone on either side of the head while using 3D audio.

Enabling/Disabling 3D Audio:

- 1) Use the **FMS** Knob and the **Setup 2** Softkey to display the 'Aux - System Setup 2' Page.
- 2) Push the **FMS** Knob to activate the flashing cursor.
- 3) Turn the large **FMS** Knob to highlight the Pilot or Copilot 3D Audio Field in the Audio Configuration Box.
- 4) Turn the small **FMS** Knob to select 'Off' or 'On'.
- 5) Press the **ENT** Key to complete the selection.

Swapping Left-Right Audio:

- 1) Use the **FMS** Knob and the **Setup 2** Softkey to select the 'Aux - System Setup 2' Page.
- 2) Push the **FMS** Knob to activate the flashing cursor.
- 3) Turn the large **FMS** Knob to highlight Pilot or Copilot L-R Swap in the Audio Configuration Box.

- 4) Turn the small **FMS** Knob to select 'Off' or 'On'.
- 5) Press the **ENT** Key to complete the selection.

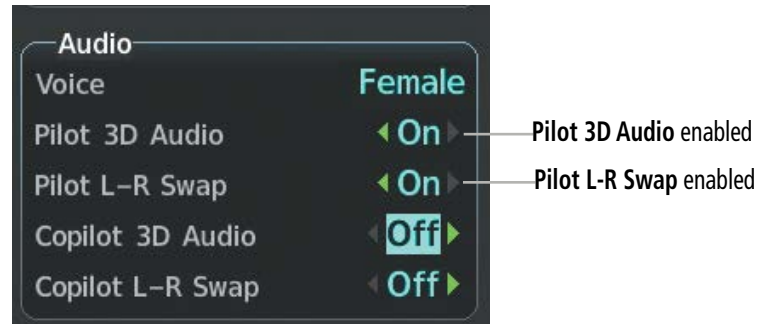


Figure 4-27 3D Audio and L-R Swap Selection

SPEAKER AND PASSENGER ADDRESS (PA) SYSTEM

Pressing the **SPKR/PA** Key selects and deselects the speaker. The in-key annunciation indicates SPKR status. A solid annunciation indicates the speaker is active. All selected radios can be heard over the speaker whenever the speaker is selected. Certain aural alerts and warnings (autopilot, traffic, altitude) are always heard on the speaker, even when the speaker is not selected. The speaker volume is adjustable within a nominal range. Contact a Garmin-authorized service center for volume adjustment.

Press and hold the **SPKR/PA** Key for 2 seconds to initiate the Passenger Address Mode. The PA annunciation immediately to the right of the **SPKR/PA** Key indicates PA status. A solid annunciation indicates the PA mode is active while a flashing annunciation indicates a PTT has been keyed.



Figure 4-28 Speaker and Passenger Address Mode

SPLIT-PA MODE

When PA is active, the selected COM MICs become inactive. The selected COM MICs will become active again when PA is inactive. Split-PA Mode allows the pilot to continue using the COM radios while the copilot delivers PA announcements. To initiate Split-PA Mode, first enter Split-COM mode by pressing the **COM1 MIC** Key and the **COM2 MIC** Key simultaneously, then press and hold the **SPKR/PA** Key for 2 seconds. When in Split COM mode, PA can be selected. The copilot will transmit over PA in Split COM mode, while the pilot transmits over the selected COM.

INTERCOM

The GMA 1360 includes an intercom system (ICS), two MUSIC inputs, and one telephone/entertainment input for the pilot, copilot and passengers. The intercom provides for selected Pilot, Copilot, and Passenger audio isolation. Each ICS position can be either active (annunciation illuminated) or inactive (annunciation extinguished). ICS annunciations are blue if an active Bluetooth connection is made to a recording device. Otherwise, the annunciations are white.

Press the **PILOT ICS** Key, **COPLT ICS** Key, or the **PASS ICS** Key to activate/deactivate ICS positions.

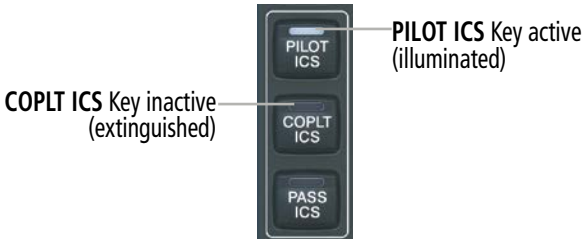


Figure 4-29 Intercom Controls and State

ICS control uses the following logic:

- The pilot and copilot always hear the selected aircraft audio (COM, NAV, etc) regardless of ICS key state.
- All active ICS positions will hear aircraft audio.
- All active ICS positions will hear other active ICS positions.
- Passengers will always hear other passengers, regardless of the PASS ICS state.
- Any aircraft or microphone audio not explicitly stated to be heard by an ICS position will not be heard by that position.

INTERCOM MODES

Audio Panel	Pilot Hears	Copilot Hears	Passenger Hears
 or  or 	Selected Radios Aural Alerts	Selected Radios Aural Alerts	Passenger MIC
	Selected Radios Aural Alerts	Selected Radios Aural Alerts	Selected Radios Aural Alerts Passenger MIC
	Selected Radios Aural Alerts Copilot MIC	Selected Radios Aural Alerts Pilot MIC	Passenger MIC
	Selected Radios Aural Alerts	Selectd Radios Aural Alerts Passenger MIC	Selected Radios Aural Alerts Copilot MIC Passenger Mic

Audio Panel	Pilot Hears	Copilot Hears	Passenger Hears
	Selected Radios Aural Alerts Passenger MIC	Selected Radios Aural Alerts	Selected Radios Aural Alerts Pilot MIC Passenger MIC
	Selected Radios Aural Alerts Copilot MIC Passenger MIC	Selected Radios Aural Alerts Pilot MIC Passenger MIC	Pilot MIC Copilot MIC Passenger MIC

Table 4-2 ICS Isolation Modes (GMA 1360)

INTERCOM VOLUME AND SQUELCH

The VOL/SQ and CRSR Knobs control selection, volume, and manual squelch adjustment for audio sources. The small knob controls the volume or squelch. Turning the large knob activates and moves the cursor (flashing white or blue annunciation if in Blue-Select Mode) to the audio source to adjust. The cursor will time-out after a few seconds and the position of the cursor will always default back to the **PILOT ICS** Key. Pushing the small knob cancels the cursor.

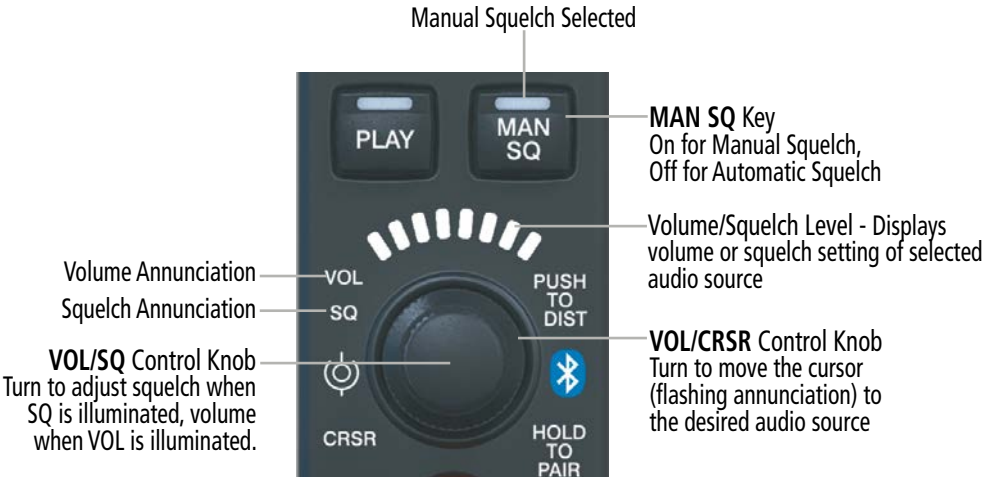


Figure 4-30 Volume/Squelch Control

SPLIT COM MODE



NOTE: Split COM performance is affected by the distance between the COM antennas and the separation of the tuned frequencies. If the selected COM1 and COM2 frequencies are too close together, interference may be heard during transmission on the other radio.

Split-COM mode allows the pilot to transmit on COM1 while the copilot transmits on COM2. Press the **COM1 MIC** Key and the **COM2 MIC** Key simultaneously to enter Split-COM mode.

The COM1 MIC and COM2 MIC annunciators are illuminated and the active COM1 and COM2 frequencies are displayed in green. The COM1 MIC annunciation flashes when the pilot's PTT is pressed and the COM2 MIC annunciation flashes when the copilot's PTT is pressed.

Exit Split-COM mode by pressing either COM MIC Key individually and the key annunciation will extinguish.

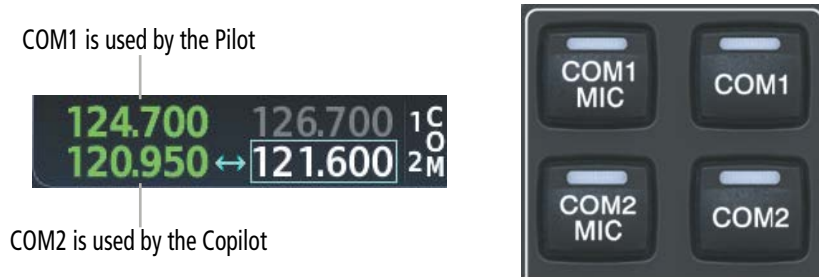


Figure 4-31 Split COM Operation

CLEARANCE RECORDER

The Audio Panel contains a digital clearance recorder that continually records up to 2.5 minutes of the selected COM radio signal. Recorded COM audio is stored in separate memory blocks. Once 2.5 minutes of recording time have been reached, the recorder begins recording over the stored memory blocks, starting from the oldest block.

The **PLAY** Key controls the play function and the annunciation remains illuminated whenever the recorded audio is being played. Press the **PLAY** Key once to play the last recorded memory block. Press again while audio is playing and the previous block of recorded audio is played. Each subsequent press plays each previously recorded block. Pressing the **MKR/MUTE** Key, PTT, or receiving a COM transmission stops the recording. The **PLAY** Key annunciation extinguishes when the recording is finished or interrupted.

Removing system power automatically clears all recorded audio blocks.



Figure 4-32 PLAY Key

BLUETOOTH SETUP



NOTE: Pairing is only necessary during the first attempt to connect a Bluetooth device to the audio panel. Once paired, the audio panel and the device will connect automatically.

PAIRING A BLUETOOTH DEVICE WITH THE AUDIO PANEL

Push and hold the **VOL/SQ** Knob for two seconds. The Bluetooth annunciation flashes to indicate the unit is discoverable and the aural message “Bluetooth Discoverable” is heard. The Audio Panel will remain discoverable for 60 seconds or until a successful pair is established. Once paired, the Bluetooth annunciation will stop flashing and turn a steady blue and the aural message “Bluetooth paired” is heard.

ASSIGNING AN AUDIO SOURCE TO THE BLUETOOTH DEVICE



NOTE: Bluetooth audio can only be assigned to one Audio Panel source at a time. Once Bluetooth audio is assigned to an audio source, the remaining entertainment audio sources will only cycle between OFF and WHITE.

Press the **TEL** Key, the **MUS1** Key, or the **MUS2** Key until the annunciation turns blue (audio from the Bluetooth source will not be heard until this step is complete). The annunciation cycles OFF-WHITE-BLUE. WHITE selects the wired audio source. BLUE selects the Bluetooth audio source. The BLUE source assignment will persist through Bluetooth audio connection disruptions. Bluetooth audio will maintain a separate volume level and Blue Select distribution from the wired audio source.

If the Bluetooth connection is supporting a phone call, all intercom positions listening to that source can also speak on the call through the headset MICs.

BLUETOOTH CONNECTED RECORDING DEVICES

If the Audio Panel detects a recording device as the Bluetooth connected source, the PILOT ICS annunciation will turn blue and all audio heard by the Pilot will be recorded. Press and hold the **PILOT ICS** Key to enable/disable Bluetooth recording mode and the aural messages “Bluetooth Recording Mode Enabled” or “Bluetooth Recording Mode Disabled” is heard.

Enabling/Disabling Automatic Reconnect of a Paired Device:

- 1) While viewing the ‘Aux - Connex Setup’ Page, push the **FMS** Knob to activate the cursor.
- 2) Turn the large **FMS** Knob to highlight the desired paired device.
- 3) Turn the small **FMS** Knob to select ‘Enabled’ or ‘Disabled’. Selecting ‘Enabled’ allows the system to automatically connect to a previously paired device when detected.
- 4) Push the **FMS** Knob to remove the cursor.

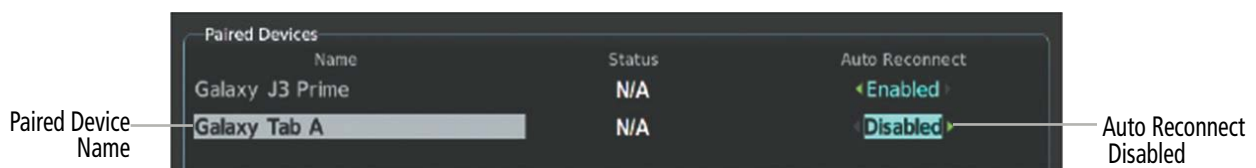


Figure 4-33 Enable/Disable Automatic Reconnect

Removing a Paired Device:

- 1) While viewing the ‘Aux - Connex Setup’ Page, push the **FMS** Knob to activate the cursor.
- 2) Turn the large **FMS** Knob to highlight the desired paired device.
- 3) Press the **Remove** Softkey. A confirmation screen is displayed.
- 4) If necessary, turn the large **FMS** Knob to select ‘Yes’.
- 5) Press the **ENT** Key to remove the device from the list of paired devices.

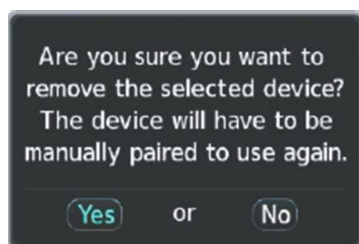


Figure 4-34 Removing a Paired Device

BLUE-SELECT MODE

Non-flight audio (TEL, MUS1, and MUS2) is distributed to crew and passengers using Blue Select Mode. Push the **VOL/SQ** Knob (small knob) to activate Blue Select mode. If the volume control cursor is active, push the **VOL/SQ** Knob twice. The first push cancels the volume control cursor and the second push activates Blue Select Mode.

Press the TEL, MUS1, or MUS2 key to select the audio source for distribution. Turning the **CRSR** Knob (large knob) will also change the selected audio source. When Blue Select Mode is active, the annunciation of the selected audio source (TEL, MUS1, or MUS2) will be flashing blue and the ICS annunciation of any position currently receiving that source will be solid blue. Press any of the ICS buttons to distribute the selected audio to that position.

Selecting any key other than PILOT ICS, COPLT ICS, PASS ICS, TEL, MUS1, or MUS2 will cancel Blue-Select Mode. Pushing the small knob will also cancel Blue-Select Mode. After approximately ten seconds with no input, the Blue-Select Mode will automatically cancel.

The following example indicates the pilot, copilot, and passengers will hear telephone audio.



Figure 4-35 Blue-Select Mode

ENTERTAINMENT INPUTS



NOTE: *MUSIC INPUT #1 and MUSIC INPUT #2 cannot be completely turned off. Audio level for MUSIC INPUT #1 and MUSIC INPUT #2 can be adjusted by a Garmin-authorized service center.*

The Audio Panel provides two stereo auxiliary entertainment inputs: MUSIC INPUT #1 and MUSIC INPUT #2. These inputs are compatible with popular portable entertainment devices such as cell phones, and tablets. Two 3.5-mm stereo phone jacks are installed in convenient locations for audio connection. The headphone outputs of the entertainment devices are plugged into the MUSIC INPUT #1 or MUSIC INPUT #2 jacks.

The current ICS state of isolation affects the distribution of the entertainment input MUSIC INPUT #1.

MUSIC INPUT

Non-flight audio (TEL, MUS1, and MUS2) is distributed to crew and passengers without regard to ICS settings. These distributions are managed via Blue-Select Mode.

MUSIC INPUT MUTING

MUSIC INPUT muting occurs when aircraft radio or marker beacon activity is heard. MUSIC INPUT is always soft muted when an interruption occurs from these sources. Soft muting is the gradual return of MUSIC INPUT to its original volume level. The time required for MUSIC INPUT volume to return to normal is between one-half and four seconds.

MUSIC INPUT MUTING ENABLE/DISABLE

Telephone and entertainment is managed via airframe configuration. Regardless of configuration, telephone and entertainment audio is always muted during alerts.

SIRIUSXM RADIO ENTERTAINMENT

SiriusXM Radio audio from the Data Link Receiver may be heard by the pilot and passengers simultaneously (optional: requires subscription to SiriusXM Radio Service). Refer to the Additional Features Section for more details on the Data Link Receiver.

4.6 AUDIO PANEL PREFLIGHT PROCEDURE



NOTE: If the pilot and/or copilot are using headsets that have a high/low switch or volume control knob, verify the switch is in the high position and the volume control on the headsets are at maximum volume setting. On single-pilot flights, verify that all other headsets are not connected to avoid excess noise in the audio system.



NOTE: When the **MAN SQ** Key is pressed, the ICS squelch can be set manually by the pilot and copilot. If manual squelch is set to full open (SQ annunciated and the knobs turned counterclockwise) background noise is heard in the ICS system as well as during COM transmissions.

After applying power to the system, the following steps aid the flight crew in maximizing the use of the Audio Panels as well as prevent flight crew induced issues. These preflight procedures should be performed each time a flight crew boards the aircraft to insure awareness of all audio levels in the Audio Panels and radios.

Setting the Audio Panel during preflight:

- 1) Press the **MAN SQ** Key so the in-key annunciation is illuminated.
- 2) Verify manual squelch is set to full open.
- 3) To enable the intercom selection(s) press the PILOT ICS, COPILOT ICS, and/or PASS ICS Keys so the in-key annunciation(s) are illuminated.
- 4) Turn CRSR Control Knob to select the intercom audio source to be adjusted. Once selected, turn VOL/SQ Control Knob to set the intercom audio level for that position.
- 5) Turn CRSR Control Knob to select the COM/NAV radios and each remaining audio source to be adjusted. Once selected, turn VOL/SQ Control Knob to adjust the volume level for that position.
- 6) Press the **MAN SQ** Key so the in-key annunciation is no longer illuminated. Auto Squelch will now be active.

Once this procedure has been completed, the pilot and copilot can change settings, keeping in mind the notes above.

4.7 ABNORMAL OPERATION

Abnormal operation of the system includes equipment failures of the system components and failure of associated equipment, including switches and external devices.

AUDIO PANEL FAIL-SAFE OPERATION

If there is a failure of the Audio Panel, a fail-safe circuit connects the pilot's headset and microphone directly to the COM1 transceiver.

STUCK MICROPHONE

If the push-to-talk (PTT) key becomes stuck, the COM transmitter stops transmitting after 35 seconds of continuous operation. An alert appears on the PFD to advise the crew of a stuck microphone.

The MIC key annunciation on the Audio Panel flashes as long as the PTT key remains stuck. If in split COM mode (**MIC1** and **MIC2** selected), the annunciation will flash above the MIC key that has the stuck PTT switch.

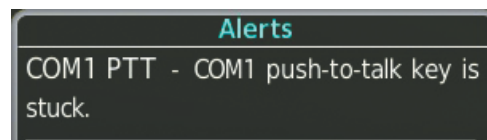


Figure 4-36 Stuck Microphone Alert

COM TUNING FAILURE

In case of a COM system tuning failure, the emergency frequency (121.500 MHz) is automatically tuned in the radio in which the tuning failure occurred. Depending on the failure mode, a yellow X may appear on the frequency display.



Figure 4-37 COM Tuning Failure

TRANSPONDER FAILURE

If the active transponder fails, a yellow X will appear in the Transponder Data Box on the PFD and a XPDR Fail system message is displayed.




Figure 4-38 Transponder Fail Indication

REVERSIONARY MODE

The red **DISPLAY BACKUP** Button selects the Reversionary Mode. See the System Overview Section for more information on Reversionary Mode.

SYSTEM OVERVIEW
FLIGHT INSTRUMENTS
EIS
AUDIO & CNS
FLIGHT MANAGEMENT
HAZARD AVOIDANCE
AFCS
ADDITIONAL FEATURES
APPENDICES
INDEX

Blank Page

SECTION 5 FLIGHT MANAGEMENT

5.1 INTRODUCTION

The system is an integrated flight, engine, communication, navigation and surveillance system. This section of the Pilot's Guide explains flight management using the system.

The most prominent part of the system are the two full color displays: one Primary Flight Display (PFD) and a Multi Function Display (MFD). The information to successfully navigate the aircraft using the GPS sensors is displayed on the PFD and the MFD.

Navigation mode indicates which sensor is providing the course data (e.g., GPS, VOR) and the flight plan phase (e.g., Departure (DPRT), Terminal (TERM), Enroute (ENR), Oceanic (OCN), RNAV Approach (LNAV, LNAV+V, L/VNAV, LP, LP+V, LPV), or Missed Approach (MAPR)). L/VNAV, LP, LP+V, and LPV approach service levels are only available with SBAS.

The Inset Map and HSI Map are small versions of the Navigation Map. The Inset Map is displayed in the lower left corner of the PFD (lower right during reversionary mode), and the HSI Map is displayed in the center of the HSI. The Inset Map and the HSI Map may each be referred to as the PFD Map. A PFD Map is displayed by pressing the **Map/HSI** Softkey, pressing the **Layout** Softkey, then pressing either the **Inset Map** or **HSI Map** Softkey. Pressing the **Map Off** Softkey removes the PFD Map.

The Navigation Map displays aviation data (e.g., airports, VORs, airways, airspace), geographic data (e.g., cities, lakes, highways, borders), topographic data (map shading indicating elevation), and hazard data (e.g., traffic, terrain, weather). The amount of displayed data for the Inset Map can be reduced by pressing the **Map/HSI** Softkey on the PFD, then pressing the **Detail** Softkey. The amount of displayed data for the Navigation Map can be reduced by pressing the **Detail** Softkey on the MFD. The Navigation Map can be oriented three different ways: North Up (NORTH UP), Track Up (TRK UP), or Heading Up (HDG UP).

An aircraft icon is placed on the Navigation Map at the location corresponding to the calculated present position. The aircraft position and the flight plan legs are accurately based on GPS calculations. The basemap upon which these are placed are from a source with less resolution, therefore the relative position of the aircraft to map features is not exact. The leg of the active flight plan currently being flown is shown as a magenta line on the navigation map. The other legs are shown in white.

There are 28 different map ranges available, from 250 feet to 1000 nm. Range is indicated in the upper left quadrant of the range ring shown around the aircraft icon. This indicated range is the range from the aircraft icon to the range ring, and roughly half the range to the top edge of the displayed map. To change the map range on any map, turn the **Joystick** counter-clockwise to zoom in (-, decreasing), or clockwise to zoom out (+, increasing).

The Direct-to Window, the Flight Plan Window, the Procedures Window, and the Nearest Airports Window can be displayed in the lower right corner of the PFD. Details of these windows are discussed in detail later in the section.



Figure 5-1 GPS Navigation Information on the PFD Inset Map



Figure 5-2 GPS Navigation Information on the PFD HSI Map



Figure 5-3 GPS Navigation Information on the MFD Navigation Page

NAVIGATION STATUS BOX AND NAVIGATION DATA BAR

The Navigation Status Box located at the top of the PFD contains two fields displaying the following information:

DIGGY → TIFTO | **DIS 26.7NM** **BRG 287°**

Figure 5-4 PFD Navigation Status Box

- Active flight plan leg (e.g., 'D → KICT' or 'KIXD → KCOS') **or** flight plan annunciations
- Distance (DIS) and Bearing (BRG) to the next waypoint **or** flight plan annunciations (e.g., 'TOD within 1 minute')

The symbols used in the PFD status box are:

Symbol	Description	Symbol	Description
	Active Leg		Left Holding Pattern
	Direct-to		Vector to Final
	Right Procedure Turn		Right DME Arc/Radius to Fix Leg
	Left Procedure Turn		Left DME Arc/Radius to Fix Leg
	Right Holding Pattern		

The Navigation Data Bar located at the top of the MFD contains four fields, displaying one of the following:

BRG	Bearing	ETA	Estimated Time of Arrival	TAS	True Airspeed
DIS	Distance	ETE	Estimated Time Enroute	TKE	Track Angle Error
DTK	Desired Track	FOB	Fuel on Board	TRK	Track
END	Endurance	FOD	Fuel over Destination	VSR	Vertical Speed Required
ENR	ETE to Final Destination	GS	Ground Speed	XTK	Cross-Track Error
ESA	Enroute Safe Altitude	MSA	Minimum Safe Altitude		



NOTE: The MSA altitude displayed will equal the highest grid MORA (Minimum Off Route Altitude) within a 10 mile square, surrounding the aircraft. The square is aligned to the cardinal directions and provides 1,000 ft separation (2,000 ft in designated mountainous terrain within the U.S.). Grid MORA data (or its equivalent) must be present in the database to provide an MSA value.

GS 141KT **DTK 287°** **TRK 285°** **ETE 11:24**

Figure 5-5 MFD Navigation Data Bar

The navigation information displayed in the four data fields can be selected on the MFD Data Bar Fields Box on the 'Aux – System Setup 1' Page. The default selections (in order left to right) are GS, DTK, TRK, and ETE.

Changing a field in the MFD Navigation Data Bar:

- 1) Select the 'Aux – System Setup 1' Page.
- 2) Press the **FMS** Knob momentarily to activate the flashing cursor.
- 3) Turn the large **FMS** Knob to highlight the desired field number in the 'MFD Data Bar Fields' Box.
- 4) Turn the small **FMS** Knob to display and scroll through the data options list to select the desired data.
- 5) Press the **ENT** Key. Pressing the **Defaults** Softkey returns all fields to the default setting.

5.2 USING MAP DISPLAYS

Map displays are used extensively in the system to provide situational awareness in flight. Most system maps can display the following information:

- Airports, NAVAIDs, airspace, airways, land data (highways, cities, lakes, rivers, borders, etc.) with names
- Map range
- Wind direction and speed
- Map orientation
- Icons for enabled map features
- Aircraft icon (representing present position)
- Obstacle data
- Topography scale
- Map Pointer information (distance and bearing to pointer, location of pointer, name, and other pertinent information)
- Fuel range ring
- Flight plan legs
- User waypoints
- Track vector
- Terrain
- Topography data

The information in this section applies to the following maps unless otherwise noted:

- All Map Group Pages ('Map')
- All Waypoint Group Pages ('WPT')
- 'Aux – Trip Planning' Page ('Aux')
- Flight Plan Pages ('FPL')
- All Nearest Group Pages ('NRST')
- Direct To Window
- PFD Maps
- Procedure Loading Pages

MAP ORIENTATION

Maps are shown in one of three different orientation options, allowing flexibility in determining aircraft position relative to other items on the map (north up) or for determining where map items are relative to where the aircraft is going (track up or heading up). The map orientation is shown in the upper left corner of the map.



Figure 5-6 Map Orientation

- North up (North up) aligns the top of the map display to north (default setting).
- Track up (Track up) aligns the top of the map display to the current ground track.
- Heading up (HDG up) aligns the top of the map display to the current aircraft heading.

The Auto North Up setting configures the map to switch automatically to a north up orientation when the map range reaches a minimum range.



NOTE: When panning or reviewing active flight plan legs in a non-North Up orientation, the map does not show the map orientation nor the wind direction and speed.



NOTE: Map orientation can only be changed on the 'Map – Navigation Map' Page. Any other displays that show navigation data reflect the orientation selected for the 'Map – Navigation Map' Page.

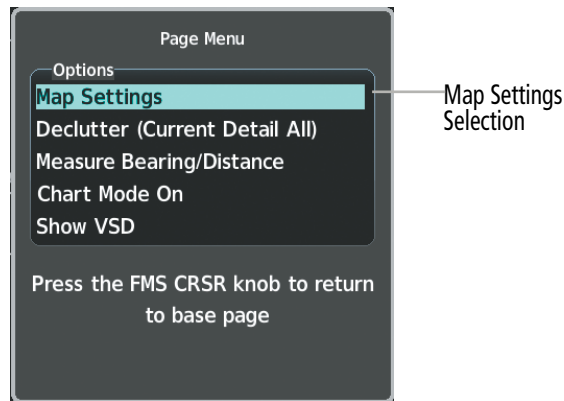


Figure 5-7 Navigation Map Page Menu

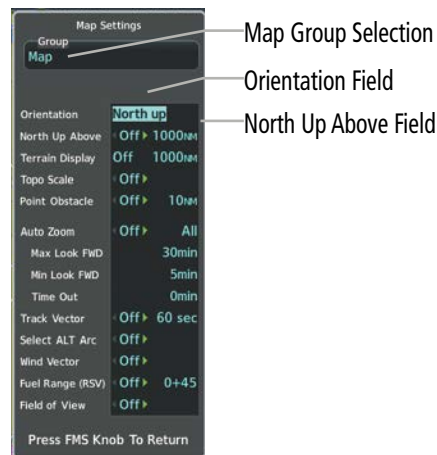


Figure 5-8 Map Settings Menu - Map Group

Changing the Navigation Map orientation:

- 1) With the 'Map – Navigation Map' Page displayed, press the **MENU** Key. The cursor flashes on the 'Map Settings' option.
- 2) Press the **ENT** Key to display the 'Map Settings' Window.
- 3) Select the 'Map' Group.
- 4) Press the **ENT** Key
- 5) Turn the large **FMS** Knob, or press the **ENT** Key once, to select the 'Orientation' Field.
- 6) Turn the small **FMS** Knob to select the desired orientation.
- 7) Press the **ENT** Key to select the new orientation.
- 8) Press the **FMS** Knob to return to the base page.

Enabling/disabling Auto North Up and selecting the minimum switching range:

- 1) Press the **MENU** Key with the 'Map – Navigation Map' Page displayed. The cursor flashes on the 'Map Settings' option.
- 2) Press the **ENT** Key. The 'Map Settings' Menu is displayed.
- 3) Select the 'Map' group.
- 4) Press the **ENT** Key.
- 5) Highlight the 'North Up Above' Field.
- 6) Select 'On' or 'Off' using the small **FMS** Knob.
- 7) Press the **ENT** Key to accept the selected option. The flashing cursor highlights the range field.
- 8) Use the small **FMS** Knob to select the desired range.
- 9) Press the **ENT** Key to accept the selected option.
- 10) Press the **FMS** Knob to return to the 'Map – Navigation Map' Page

MAP RANGE

There are 28 different map ranges available, from 250 feet to 1000 nm. Range is indicated in the upper left quadrant of the range ring shown around the aircraft icon. This indicated range is the range from the aircraft icon to the range ring, and roughly half the range to the top edge of the displayed map. When the map range is decreased to a point that exceeds the capability of the system to accurately represent the map, a magnifying glass icon is shown to the left of the map range. To change the map range turn the **Joystick** counter-clockwise to decrease the range, or clockwise to increase the range.



Figure 5-9 Map Range

AUTO ZOOM

Auto zoom allows the system to change the map display range to the smallest range clearly showing the active waypoint. Auto zoom can be overridden by adjusting the range with the **Joystick**, and remains until the active waypoint changes, a terrain or traffic alert occurs, the aircraft takes off, or the manual override times out (timer set on 'Map Settings' Window). Auto zoom is suspended while the map pointer is active.

If a terrain caution or warning occurs, all navigation maps automatically adjust to the smallest map range clearly showing the potential impact areas. If a new traffic advisory alert occurs, any navigation map displaying traffic advisory alerts automatically adjusts to the smallest map range clearly showing the traffic advisory. When terrain or traffic alerts clear, the map returns to the previous auto zoom range based on the active waypoint.

The auto zoom function can be turned on or off independently for the PFD and MFD. Control of the ranges at which the auto zoom occurs is done by setting the minimum and maximum 'look forward' times (set on the 'Map Settings' Window for the 'Map' Group). These settings determine the minimum and maximum distance to display based upon the aircraft's ground speed.

- » Waypoints that are long distances apart cause the map range to increase to a point where many details on the map are decluttered. If this is not acceptable, lower the maximum look ahead time to a value that limits the auto zoom to an acceptable range.
- » Waypoints that are very short distances apart cause the map range to decrease to a point where situational awareness may not be what is desired. Increase the minimum look ahead time to a value that limits the auto zoom to a minimum range that provides acceptable situational awareness.
- » Flight plans that have a combination of long and short legs cause the range to increase and decrease as waypoints sequence. To avoid this, auto zoom can be disabled or the maximum/ minimum times can be adjusted.
- » The 'time out' time (configurable on the 'Map Settings' Window for the Map Group) determines how long auto zoom is overridden by a manual adjustment of the range knob. At the expiration of this time, the auto zoom range is restored. Setting the 'time out' value to zero causes the manual override to never time out.
- » When the maximum 'look forward' time is set to zero, the upper limit becomes the maximum range available (1000 nm).
- » When the minimum 'look forward' time is set to zero, the lower limit becomes 1.5 nm.

Configuring automatic zoom:

- 1) Press the **MENU** Key with the 'Map – Navigation Map' Page displayed. The cursor flashes on the 'Map Settings' option.
- 2) Press the **ENT** Key. The 'Map Settings' Menu is displayed.
- 3) Turn the small **FMS** Knob to select the 'Map' group.
- 4) Press the **ENT** Key.
- 5) Turn the large **FMS** Knob to highlight the 'Auto Zoom' On/Off Field, and select 'Off' or 'On' using the small **FMS** Knob.
- 6) Press the **ENT** Key to accept the selected option. The flashing cursor highlights the 'Auto Zoom' display selection Field.
- 7) Select 'MFD', 'PFD', or 'All' using the small **FMS** Knob.
- 8) Press the **ENT** Key to accept the selected option. The flashing cursor highlights the 'Max Look FWD' Field. Times are from zero to 999 minutes.
- 9) Use the **FMS** Knobs to set the time. Press the **ENT** Key.
- 10) Repeat step 9 for 'Min Look FWD' (zero to 99 minutes) and 'Time Out' (zero to 99 minutes).
- 11) Press the **FMS** Knob to return to the 'Map – Navigation Map' Page.

MAP PANNING

Map panning allows the pilot to:

- View parts of the map outside the displayed range without adjusting the map range
- Highlight and select locations on the map
- Review information for a selected airport, NAVAID or user waypoint
- Designate locations for use in flight planning
- View airspace and airway information

When the panning function is selected by pushing the **Joystick**, the Map Pointer flashes on the map display. A window also appears at the top of the map display showing the latitude/longitude position of the pointer, the bearing and distance to the pointer from the aircraft's present position, and the elevation of the land at the position of the pointer.



NOTE: The map is normally centered on the aircraft's position. If the map has been panned and there has been no pointer movement for about 60 seconds, the map reverts back to centered on the aircraft position and the flashing pointer is removed.



Figure 5-10 Navigation Map - Map Pointer Activated

When the Map Pointer is placed on an object, the name of the object is highlighted (even if the name was not originally displayed on the map). When any map feature or object is selected on the map display, pertinent information is displayed.

Information about Point of Interest



Figure 5-11 Navigation Map - Map Pointer on Point of Interest

When the Map Pointer crosses an airspace boundary, the boundary is highlighted and airspace information is shown. The information includes the name and class of airspace, the ceiling in feet above Mean Sea Level (MSL), and the floor in feet MSL.

Panning the map:

- 1) Press the **Joystick** to display the Map Pointer.
- 2) Move the **Joystick** to move the Map Pointer around the map.
- 3) Press the **Joystick** to remove the Map Pointer and recenter the map on the aircraft's current position.

Reviewing information for an airport, NAVAID, or user waypoint:

- 1) With the desired map page displayed on the MFD, push the **Joystick** to display the Map Pointer and place the Map Pointer on a waypoint.
- 2) Press the **ENT** Key to display the 'WPT – Waypoint Information' Page for the selected waypoint.
- 3) Press the **Go Back** Softkey, the **CLR** Key, or the **ENT** Key to exit the 'WPT – Waypoint Information' Page and return to the 'Map – Navigation Map' Page showing the selected waypoint.

Viewing airspace information for a special-use or controlled airspace:

- 1) Place the Map Pointer on the boundary of an airspace.
- 2) Push the **Joystick** to remove the Map Pointer and center the map on the aircraft.

Or:

- 1) Place the Map Pointer on an open area within the boundaries of an airspace.
- 2) Press the **ENT** Key to display an options menu.
- 3) 'Review Airspaces' should already be highlighted, if not select it. Press the **ENT** Key to display the Airspace Information Page for the selected airspace.
- 4) Press the **CLR** or **ENT** Key to exit the Airspace Information Page.

MEASURING BEARING AND DISTANCE

Distance and bearing from the aircraft's present position to any point on the viewable navigation map may be calculated using the 'Measure Bearing and Distance' selection from Navigation Map page menu. The bearing and distance tool displays a dashed Measurement Line and a Measure Pointer to aid in graphically identifying points with which to measure. Lat/Long, distance and elevation data for the Measure Pointer is provided in a window at the top of the navigation map.

Measuring bearing and distance between any two points:

- 1) Press the **MENU** Key (with the Navigation Map Page displayed).
- 2) Highlight the 'Measure Bearing/Distance' field.
- 3) Press the **ENT** Key. A Measure Pointer is displayed on the map at the aircraft's present position.
- 4) Move the **Joystick** to place the reference pointer at the desired location. The bearing and distance are displayed at the top of the map. Elevation at the current pointer position is also displayed. Pressing the **ENT** Key changes the starting point for measuring.
- 5) To exit the Measure Bearing/Distance option, push the **Joystick**; or select 'Stop Measuring' from the Page Menu and press the **ENT** Key.



Figure 5-12 Navigation Map - Measuring Bearing and Distance

TOPOGRAPHY

All navigation maps can display various shades of topography colors representing land elevation, similar to aviation sectional charts. Topographic data can be displayed or removed as described in the following procedures. Topographic data can also be displayed on the selectable profile map at the bottom of the navigation map.

Topographic data can be displayed or removed as described in the following procedures. Topographic data can also be displayed on the selectable VSD Inset at the bottom of the navigation map. In addition, the Navigation Map can display a topographic scale (located in the lower right hand side of the map) showing a scale of the terrain elevation and minimum/maximum displayed elevations.

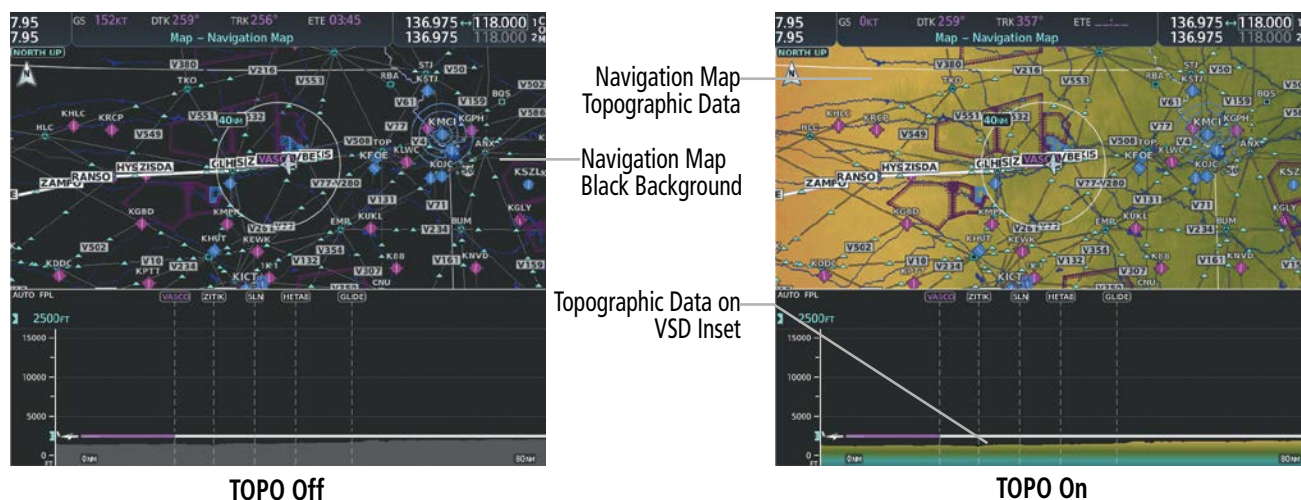


Figure 5-13 Navigation Map - Topographic Data

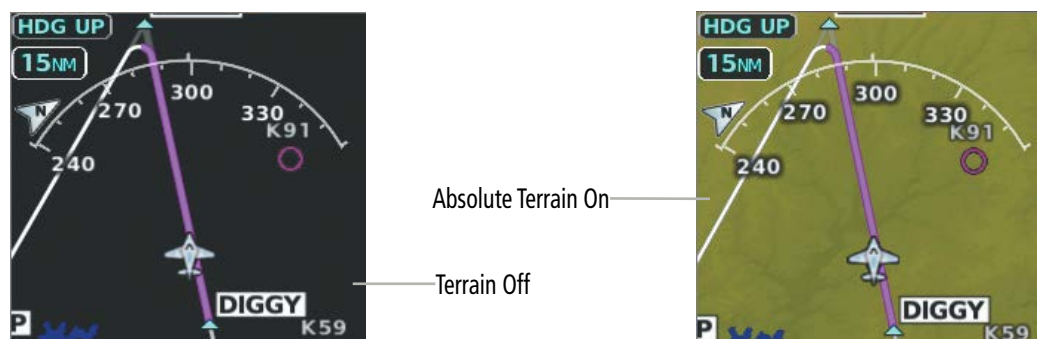


Figure 5-14 PFD Inset Map - Absolute Terrain Data

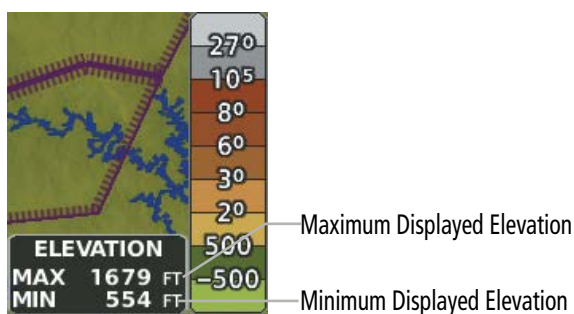


Figure 5-15 Navigation Map - Topo Scale

Displaying/removing topographic data on all MFD pages displaying navigation maps:

- 1) Press the **Map Opt** Softkey.
- 2) Press the **TER** Softkey until 'Topo' is shown on the softkey to display topographic data.
- 3) Press the **TER** Softkey until 'Off' is shown on the softkey to remove topographic data from the navigation map. When topographic data is removed from the page, all navigation data is presented on a black background.

Displaying/removing topographic data on the PFD Inset Map or the HSI Map:

- 1) Press the **Map/HSI** Softkey .
- 2) Press the **Topo** Softkey.
- 3) Press the **TER** Softkey until 'Off' is shown on the softkey to remove topographic data from the navigation map. When topographic data is removed from the page, all navigation data is presented on a black background.

Displaying/removing topographic data using the 'Map – Navigation Map' 'Page Menu' Window:

- 1) Press the **MENU** Key with the 'Map – Navigation Map' Page displayed. The cursor flashes on the 'Map Settings' option.
- 2) Press the **ENT** Key. The 'Map Settings' Window is displayed.
- 3) Turn the small **FMS** Knob to select the 'Map' Group.
- 4) Press the **ENT** Key.
- 5) Turn the large **FMS** Knob to highlight the 'Terrain Display' Field.
- 6) Turn the small **FMS** Knob to select 'Topo' or 'Off'.
- 7) Press the **FMS** Knob to return to the 'Map – Navigation Map' Page.

Selecting a topographical data range (Terrain Display):

- 1) Press the **MENU** Key with the 'Map – Navigation Map' Page displayed. The cursor flashes on the 'Map Settings' option.
- 2) Press the **ENT** Key. The 'Map Settings' Menu is displayed.
- 3) Turn the small **FMS** Knob to select the 'Map' Group.
- 4) Press the **ENT** Key.
- 5) Use the large **FMS** Knob to highlight the 'Terrain Display' range field. Ranges are from 1 nm to 1000 nm.
- 6) To change the Terrain Display range setting, turn the small **FMS** Knob to display the range list.
- 7) Select the desired range using the small **FMS** Knob.
- 8) Press the **ENT** Key.
- 9) Press the **FMS** Knob to return to the 'Map – Navigation Map' Page.

Displaying/removing the topographic scale (Topo Scale):

- 1) Press the **MENU** Key with the 'Map – Navigation Map' Page displayed. The cursor flashes on the 'Map Settings' option.
- 2) Press the **ENT** Key. The 'Map Settings' Menu is displayed.

- 3) Turn the small **FMS** Knob to select the 'Map' group and press the **ENT** Key.
- 4) Turn the large **FMS** Knob to highlight the 'Topo Scale' Field.
- 5) Turn the small **FMS** Knob to select 'On' or 'Off'.
- 6) Press the **FMS** Knob to return to the 'Map – Navigation Map' Page.

MAP SYMBOLS

This section discusses the types of land, aviation, and airspace symbols that can be displayed. Each listed type of symbol can be turned on or off, and the maximum range to display each symbol can be set. The decluttering of the symbols from the map using the **Detail** Softkey is also discussed.

LAND SYMBOLS

The following items are configured on the land menu:

Land Symbols	Symbol	Default Range (nm)	Maximum Range (nm)
User Waypoint		25	40
Highways and Roads			
Interstate Highway (Freeway)		50	400
International Highway (Freeway)		50	400
US Highway (National Highway)		15	150
State Highway (Local Highway)		2.5	100
Local Road (Local Road)	N/A	4	25
Railroads		7.5	25
Large City (> 200,000)		100	1000
Medium City (> 50,000)		50	400
Small City (> 5,000)		25	100
State/Province		400	1000
River/Lake		75	100
Latitude/Longitude (LAT/LON)		1	1000

Table 5-1 Land Symbol Information

AVIATION SYMBOLS

The following items are configured on the aviation menu:


Aviation Symbols	Symbol	Default Range (nm)	Maximum Range (nm)
Large Airport (Longest Runway $\geq$ 8100 ft)		100	1000
Medium Airport (8100 ft > Longest Runway $\geq$ 5000 ft, or Longest Runway < 5000 ft with control tower)		50	400
Small Airport (Longest Runway < 5000 ft without a control tower)		25	150
Taxiways (SafeTaxi)	See Additional Features	1.5	5
Runway Extension		7.5	150
Missed Approach Preview On/Off (Missed APPR)	N/A	N/A	N/A
Intersection (INT)		25	40
Non-directional Beacon (NDB)		25	50
VOR		50	250
VOR Compass Rose On/Off	N/A	N/A	N/A
Visual Reporting Point (VRP)		25	1000
Temporary Flight Restriction (TFR)		250	1000
VNAV Constraints		1000	1000

Table 5-2 Aviation Symbol Information

AIRSPACE SYMBOLS

The following items are configured on the airspace menu:

Airspace Symbols	Symbol	Default Range (nm)	Maximum Range (nm)
Class B Airspace Altitude Label (ceiling/floor)		*	*
Class C Airspace Altitude Label (ceiling/floor)		*	*
Class D Airspace Altitude Label (ceiling)		*	*
Class B/Terminal Manoeuvring Area and Airways surrounding TMA (CL B/TMA/AWY)		50	150
Class C Airspace/Control Area (CL C/CTA)		50	100

Airspace Symbols	Symbol	Default Range (nm)	Maximum Range (nm)
Class A Airspace and Class D Airspace (CL A/D)		10	100
Restricted and Prohibited Areas (Restricted)		50	100
Military Operations Areas (MOA (Military))		50	250
ADIZ, Alert, Danger, and Warning (Other)	(see below)	50	250
ADIZ			
Alert			
Danger/Warning			

* Label placement and range is determined by the system for best display and minimal clutter

Table 5-3 Airspace Symbol Information

SYMBOL SETUP

All navigation maps can display land, aviation and airspace symbols. Symbol types (e.g. runway extensions, railroads) can be removed individually. The range sets the maximum range at which items appear on the display. For example, enabling “Runway Extension” displays a dashed line on the map extending from each runway of an airport in the flight plan when the range is set at or below the value of the map settings option.

Setting up the ‘Land’, ‘Aviation’ or ‘Airspace’ group items:

- 1) Press the **MENU** Key with the ‘Map – Navigation Map’ Page displayed. The cursor flashes on the ‘Map Settings’ option.
- 2) Press the **ENT** Key. The ‘Map Settings’ Menu is displayed.
- 3) Turn the small **FMS** Knob to select the desired group.
- 4) Press the **ENT** Key. The cursor flashes on the first field.
- 5) Turn the large **FMS** Knob to select the desired option.
- 6) Turn the small **FMS** Knob to select the desired setting (e.g. On/Off or maximum range).
- 7) Press the **ENT** Key to accept the selected option and move the cursor to the next item.
- 8) Repeat steps 5-7 as necessary.
- 9) Press the **FMS** Knob to return to the ‘Map – Navigation Map’ Page.

MAP DECLUTTER

The declutter feature allows the pilot to progressively step through four levels of removing map information. The declutter level is displayed in the **Detail** Softkey and next to the Declutter Menu Option.

The following table lists the items that are decluttered at each map detail level. The 'X' represents map items decluttered for each level of detail.

Item	Detail 3	Detail 2	Detail 1
Data Link Radar Precipitation			X
Data Link Lightning			X
Graphical METARs			X
Airports			X
Safe Taxi			X
Runway Labels			X
TFRs			X
Restricted			X
MOA (Military)			X
User Waypoints		X	X
Latitude/Longitude Grid		X	X
NAVAIDs (does not declutter if used to define airway)		X	X
VRPs		X	X
Intersections (does not declutter if used to define airway)		X	X
Class B Airspaces/TMA/AWY		X	X
Class C Airspaces/CTA		X	X
Class A/D Airspaces		X	X
Other Airspaces/ADIZ		X	X
Obstacles		X	X
Cities	X	X	X
Roads	X	X	X
Railroads	X	X	X
State/Province Boundaries	X	X	X

Table 5-4 Navigation Map Items Decluttered for each Detail Level

Decluttering the MFD navigation map:

Press the **Detail** Softkey with the 'Map – Navigation Map' Page displayed. The current declutter level is shown. With each softkey press, another level of map information is removed.

Or:

- 1) Press the **MENU** Key with the 'Map – Navigation Map' Page displayed.
- 2) Turn the **FMS** Knob to highlight 'Declutter'. The current declutter level is shown.
- 3) Press the **ENT** Key to apply the next declutter level and return to the 'Map – Navigation Map' Page.

Decluttering the PFD Map:

- 1) Press the **Map/HSI** Softkey.
- 2) Press the **Detail** Softkey. The current declutter level is shown. With each selection, another level of map information is removed.

AIRWAYS

This airways discussion is based upon the North American airway structure. The airway structure in places other than North America vary by location, etc. and are not discussed in this book. Low Altitude Airways (Victor Airways or T-Routes) start 1,200 feet above ground level (AGL) and extend up to 18,000 feet mean sea level (MSL). Low Altitude Airways are designated with a “V” or a “T” before the airway number.

High Altitude Airways (Jet Routes or Q-Routes) start at 18,000 feet MSL and extend upward to 45,000 feet MSL. High Altitude Airways are designated with a “J” or a “Q” before the airway number.

Low Altitude Airways are drawn in gray (the same shade used for roads). High Altitude Airways are drawn in green. When both types of airways are displayed, High Altitude Airways are drawn on top of Low Altitude Airways.

When airways are selected for display on the map, the airway waypoints (VORs, NDBs and Intersections) are also displayed.



Figure 5-16 Airways on MFD Navigation Page

Airways may be displayed on the map at the pilot's discretion using either a combination of **AWY** Softkey selections, or menu selections using the **MENU** Key from the Navigation Map Page. The Airway range can also be programmed to only display Airways on the MFD when the map range is at or below a specific number.

The following items are configured on the airways menu:


Airways Symbols	Symbol	Default Range (nm)	Maximum Range (nm)
Low Altitude Airways (V Routes and T Routes)		50	100
High Altitude Airways (J Routes and Q Routes)		50	100

Table 5-5 Airways Symbol Information

Displaying/removing airways:

- 1) Press the **Map Opt** Softkey.
- 2) Press the **AWY** Softkey. Both High and Low Altitude Airways are displayed (AWY On).
- 3) Press the softkey again to display Low Altitude Airways only ('AWY LO').
- 4) Press the softkey again to display High Altitude Airways only ('AWY HI').
- 5) Press the softkey again to remove High Altitude Airways. No airways are displayed ('AWY Off').

Or:

- 1) Press the **MENU** Key with the 'Map – Navigation Map' Page displayed. The cursor flashes on the 'Map Settings' option.
- 2) Press the **ENT** Key. The 'Map Settings' Window is displayed.
- 3) Turn the small **FMS** Knob to select the 'Airways' Group, and press the **ENT** Key.
- 4) Turn the large **FMS** Knob to highlight the 'Low ALT Airways' or the 'High ALT Airways' On/Off Field.
- 5) Turn the small **FMS** Knob to select 'Off' or 'On'.
- 6) Press the **FMS** Knob to return to the 'Map – Navigation Map' Page.

Selecting an airway range (Low ALT Airways or High ALT Airways):

- 1) Press the **MENU** Key with the 'Map – Navigation Map' Page displayed. The cursor flashes on the 'Map Settings' option.
- 2) Press the **ENT** Key. The 'Map Settings' Window is displayed.
- 3) Turn the small **FMS** Knob to select the 'Airways' Group, and press the **ENT** Key.
- 4) Turn the large **FMS** Knob to highlight the 'Low ALT Airways' or 'High ALT Airways' range field.
- 5) To change the range setting, turn the small **FMS** Knob to display the range list.
- 6) Select the desired range using the small **FMS** Knob.
- 7) Press the **ENT** Key.
- 8) Press the **FMS** Knob to return to the 'Map – Navigation Map' Page.

ADDITIONAL NAVIGATION MAP ITEMS

Navigation maps can display some additional items. These items (e.g. Selected Altitude Intercept Arc, Track Vector, Wind Vector, Fuel Range Ring, and SVT Field of View) can be displayed/removed individually.

See the Hazard Avoidance Section for information on displaying obstacles (Point Obstacle, Wire Obstacle) on the map.

TRACK VECTOR

The Navigation Map can display a track vector that is useful in minimizing track angle error. The track vector is a solid cyan line segment extended to a predicted location. The track vector look-ahead time is selectable (30 sec, 60 sec (default), 2 min, 5 min, 10 min, 20 min) and determines the length of the track vector. The track vector shows up to 90 degrees of a turn for the 30 and 60 second time settings. It is always a straight line for the 2 min, 5 min, 10 min and 20 min settings.

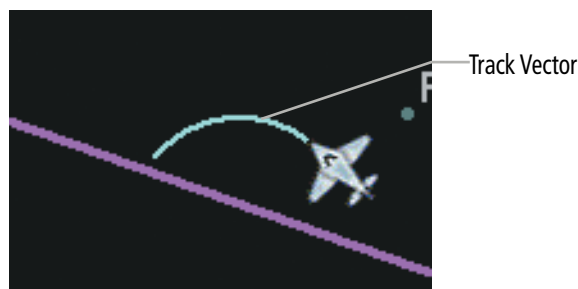


Figure 5-17 Navigation Map -Track Vector

SELECTED ALTITUDE INTERCEPT ARC

The map can display the location along the current track where the aircraft will intercept the selected altitude. The location will be shown as a cyan arc when the aircraft is actually climbing or descending.



Figure 5-18 Navigation Map - Selected Altitude Intercept Arc

WIND VECTOR ON MFD

The map displays a wind vector arrow in the upper right-hand portion of the MFD. Wind vector information is displayed as a white arrow pointing in the direction in which the wind is moving for wind speeds greater than or equal to 1 kt.



Figure 5-19 Navigation Map - Wind Vector



NOTE: The wind vector is not displayed until the aircraft is moving. It is not displayed on the Waypoint Information pages.

FUEL RANGE RING

The map can display a fuel range ring which shows the remaining flight distance. A dashed green circle indicates the selected range to reserve fuel. A solid green circle indicates the total endurance range. If only reserve fuel remains, the range is indicated by a solid amber circle.



Figure 5-20 Navigation Map - Fuel Range Ring

FIELD OF VIEW (SVT)

The map can display the boundaries of the PFD Synthetic Vision Technology (SVT) lateral field of view. The field of view is shown as two dashed lines forming a V shape in front of the aircraft symbol on the map. This is only available if SVT is installed on the aircraft.

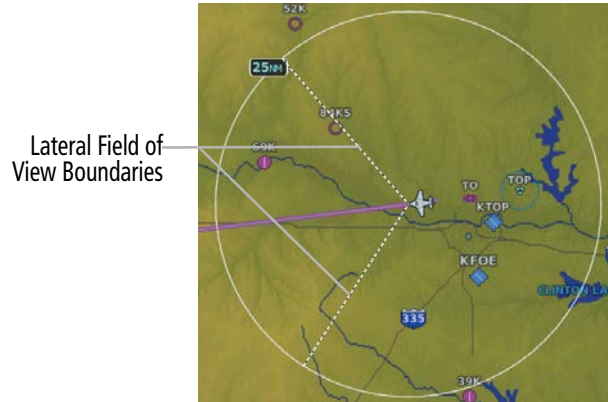


Figure 5-21 Navigation Map - Field of View

Setting up additional 'Map' Group items:

- 1) Press the **MENU** Key with the Navigation Map Page displayed. The cursor flashes on the 'Map Settings' option.
- 2) Press the **ENT** Key. The Map Settings Menu is displayed.
- 3) Turn the small **FMS** Knob to select the 'Map' group.
- 4) Press the **ENT** Key. The cursor flashes on the first field.
- 5) Turn the large **FMS** Knob to select the desired option.
- 6) Turn the small **FMS** Knob to select 'On' or 'Off'.

Or:

If it is a data field, use the **FMS** Knob to select the range or time value.

- 7) Press the **ENT** Key to accept the selected option and move the cursor to the next item.
- 8) Repeat steps 5-7 as necessary.
- 9) Press the **FMS** Knob to return to the Navigation Map.

5.3 WAYPOINTS

Waypoints are predetermined geographical positions (internal database) or pilot-entered positions, and are used for all phases of flight planning and navigation.

Communication and navigation frequencies can be tuned “automatically” from various Waypoint Information (WPT) pages, Nearest (NRST) pages, and the ‘Nearest Airports’ Window (on PFD). This auto-tuning feature simplifies frequency entry over manual tuning. Refer to the Audio & CNS Section for details on auto-tuning.

Waypoints can be selected by entering the ICAO identifier, entering the name of the facility, or by entering the city name. See the System Overview section for detailed instructions on entering data in the system. As a waypoint identifier, facility name, or location is entered, the system scrolls through the database, displaying those waypoints matching the characters which have been entered to that point. A direct-to navigation leg to the selected waypoint can be initiated by pressing the **Direct-to** Key on any of the waypoint pages.



Figure 5-22 Waypoint Information Window

If duplicate entries exist for the entered facility name or location, additional entries may be viewed by continuing to turn the small **FMS** Knob during the selection process. If duplicate entries exist for an identifier, a ‘Duplicate Waypoints’ Window is displayed when the **ENT** Key is pressed.



Figure 5-23 Waypoint Information Window - Duplicate Identifier

AIRPORTS

AIRPORT INFORMATION



NOTE: 'North Up' orientation on the 'WPT – Airport Information' Page cannot be changed; the pilot needs to be aware of proper orientation if the Navigation Map orientation is different from the 'WPT – Airport Information' Page Map.

The 'WPT – Airport Information' Page is the first page in WPT group and allows the pilot to view airport information, load frequencies (COM, NAV, and lighting), review runways, and review instrument procedures that may be involved in the flight plan. See the Audio & CNS Section for more information on loading frequencies (auto-tuning). After engine startup, the 'WPT – Airport Information' Page defaults to the airport where the aircraft is located. After a flight plan has been loaded, it defaults to the destination airport. On a flight plan with multiple airports, it defaults to the airport which is the current active waypoint.

In addition to displaying a map of the currently selected airport and surrounding area, the 'WPT – Airport Information' Page displays airport information in three boxes labeled 'Airport', 'Runways', and 'Frequencies'. For airports with multiple runways, information for each runway is available. This information is viewed on the 'WPT – Airport Information' Page by pressing the **Info** Softkey until 'Info 1' is displayed.



Figure 5-24 Airport Information

The following descriptions and abbreviations are used on the Airport Information Page:

- » Usage type: Public, Military, Private, or Heliport
- » Runway surface type: Hard, Turf, Sealed, Gravel, Dirt, Soft, Unknown, or Water
- » Runway lighting type: No Lights, Part Time, Full Time, Unknown, or PCL Freq (for pilot-controlled lighting)
- » COM Availability: TX (transmit only), RX (receive only), PT (part time), i (additional information available)



Figure 5-25 Airport Directory Example

The airport directory information is viewed on the 'WPT – Airport Directory' Page by pressing the **Info** Softkey until 'Info 2' is displayed. The following are types of airport directory information shown (if available) on the 'WPT – Airport Directory' Page:

Airport: Identifier, Type, Name, City, State, Map	Control Tower: Full/Part-time Hours, Days Open	Attendance: Annual, weekly, daily, hours
Facility Lighting and Beacon: Hours operating, Type and Location, CTAF, beacon colors	Noise Abatement: Flying Procedures	Pattern Altitudes: Aircraft Class/Altitude
Runways: Headings, Length, Width, Facility Obstructions, Surface, Condition, Clearance Slope	FBO: Name/Type, Frequencies, Services, Fees, Fuel, Credit Cards, Phone/Fax, Hours Internet, Courtesy Car	Aircraft Businesses/Clubs: Name, Type (sales, training, servicing), Frequencies/Phone/Fax, Credit Cards, Internet, Services
Frequencies: Type/Frequency	Weather Contacts: Service Type and Frequencies/Phone (AWOS/ASOS)	Obstructions: General Airport Obstructions
Flight Service Station (FSS): FSS Name, Phone Numbers	Approaches: Types	General Information and/or Notes: Fees, Airport Notes, local area information
Special Operations at Airport: Helicopters, etc.	Restaurants: On the Field and Nearby	Transportation: Taxi Services, Car Rentals, Type and Availability (public, shuttle, limo, etc.)
Attractions: Hotels, Museums, Raceways, Golfing, etc.	NAVAIDS: Type, Identifier, Frequency, Radial, Distance	Charts: VFR Sectional
Elevation: Airfield Elev (ft)	Mag Var: Airfield Mag Var (degrees)	Airport Manager: Phone

The 'Frequencies' Box uses the descriptions and abbreviations listed in the following table:

Communication Frequencies			Navigation Frequencies
Approach *	Control	Pre-Taxi	ILS
Arrival *	CTA *	Radar	LOC
ASOS	Departure *	Ramp	
ATIS	FSS	Terminal *	
AWOS	Gate	TMA *	
Center	Ground	Tower	
Class B *	Helicopter	TRSA *	
Class C *	Multicom	Unicom	
Clearance	Other		

* May include Additional Information

Table 5-6 Airport Frequency Abbreviations

A departure, arrival, or approach can be loaded using the softkeys on the 'WPT – Airport Information' Page. See the Procedures section for details. METARs or TAFs applicable to the selected airport can be selected for display (see the Hazard Avoidance section for details about weather).

Selecting an airport for review by identifier, facility name, or location:

- 1) From the 'WPT – Airport Information' Page (**Info 1** Softkey), press the **FMS** Knob.
- 2) Use the **FMS** Knobs and enter an identifier, facility name, or location within the 'Airport' Box.
- 3) Press the **ENT** Key.
- 4) Press the **FMS** Knob to remove the cursor.

Selecting a runway:

- 1) With the 'WPT – Airport Information' Page (**Info 1** Softkey) displayed, press the **FMS** Knob to activate the cursor.
- 2) Turn the large **FMS** Knob to place the cursor in the 'Runways' Box, on the runway designator.
- 3) Turn the small **FMS** Knob to display the desired runway (if more than one) for the selected airport.
- 4) To remove the flashing cursor, press the **FMS** Knob.

Viewing a destination airport:

From the 'WPT – Airport Information' Page (**Info 1** Softkey) press the **MENU** Key. Select 'View Destination Airport'. The Destination Airport is displayed.

NEAREST AIRPORT

The system provides a **Nearest** Softkey on the PFD, which gives the pilot quick access to nearest airport information (very useful if an immediate landing is required). The 'Nearest Airports' Window displays a list of up to 25 of the nearest airports. If there are more than three they are displayed in a scrollable list. If there are no nearest airports available, "None Within 200nm" is displayed.

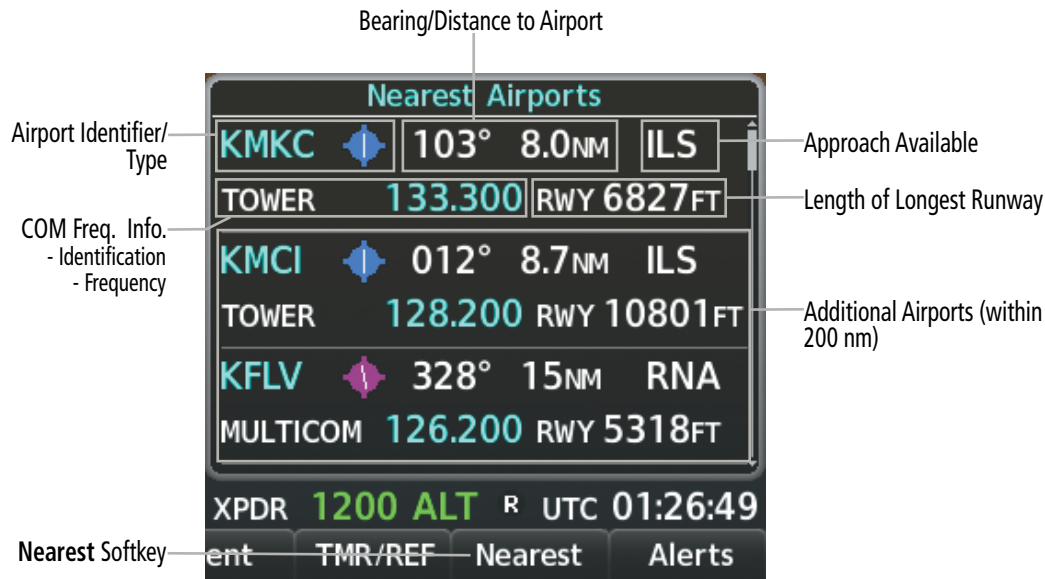


Figure 5-26 'Nearest Airports' Window on PFD

Pressing the **ENT** Key displays the PFD 'Airport Information' Window for the highlighted airport. Pressing the **ENT** Key again returns to the 'Nearest Airports' Window with the cursor on the next airport in the list. Continued presses of the **ENT** Key sequences through the information pages for all airports in the Nearest Airports list.

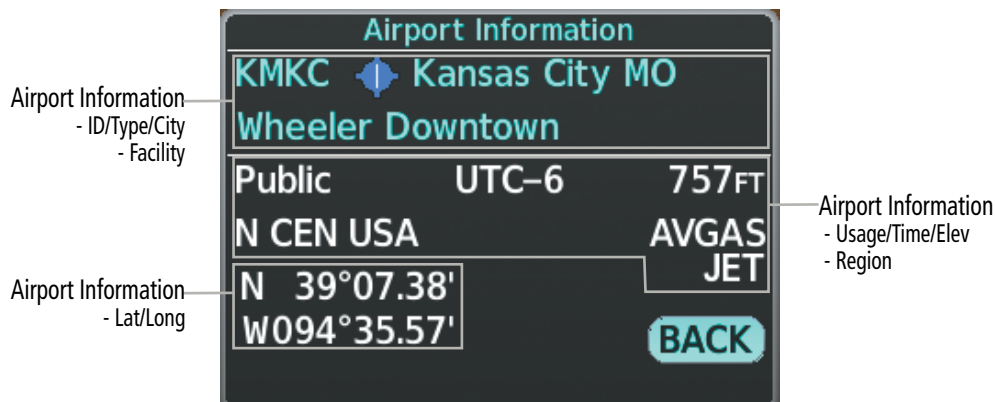


Figure 5-27 'Airport Information' Window on PFD

Viewing information for a nearest airport on the PFD:

- 1) Press the **Nearest** Softkey to display the 'Nearest Airports' Window. Press the **FMS** Knob to activate the cursor.
- 2) Highlight the airport identifier with the **FMS** Knob and press the **ENT** Key to display the 'Airport Information' Window.
- 3) To return to the 'Nearest Airports' Window press the **ENT** Key (with the cursor on 'Back') or press the **CLR** Key. The cursor is now on the next airport in the nearest airports list. (Repeatedly pressing the **ENT** Key moves through the airport list, alternating between the 'Nearest Airports' Window and the 'Airport Information' Window.)
- 4) Press the **CLR** Key or the **Nearest** Softkey to close the PFD 'Nearest Airports' Window.

The 'NRST – Nearest Airports' Page on the MFD is first in the group of NRST pages because of its potential use in the event of an in-flight emergency. The selected airport is indicated by a white arrow, and a dashed white line is drawn on the navigation map from the aircraft position to the nearest airport. The currently selected airport remains in the list until it is unselected.

In addition to displaying a map of the currently selected airport and surrounding area, the page displays nearest airport information in five boxes labeled 'Nearest Airports', 'Information', 'Runways', 'Frequencies', and 'Approaches'. If there are more than can be shown in the given box, each list can be scrolled. If there are no items for display in a boxed area, text indicating that fact is displayed.

See the Audio & CNS Section for frequency selection and the Procedures section for approaches.



Figure 5-28 Nearest Airport

Viewing information for a nearest airport on the MFD:

- 1) Turn the large **FMS** Knob to select the 'NRST' Page Group.
- 2) Turn the small **FMS** Knob to select the 'NRST – Nearest Airports' Page (it is the first page of the group, so it may already be selected). If there are no Nearest Airports available, "None Within 200nm" is displayed.
- 3) Press the **APT** Softkey; or press the **FMS** Knob; or press the **MENU** Key, highlight 'Select Airport Window' and press the **ENT** Key. The cursor is placed in the 'Nearest Airports' Box. The first airport in the nearest airports list is highlighted.
- 4) Turn the **FMS** Knob to highlight the desired airport. (Pressing the **ENT** Key also moves to the next airport.)
- 5) Press the **FMS** Knob to remove the flashing cursor.

Viewing runway information for a specific airport:

- 1) With the 'NRST – Nearest Airports' Page displayed, press the **RNWX** Softkey; or press the **MENU** Key, highlight 'Select Runway Window'; and press the **ENT** Key. The cursor is placed in the 'Runways' Box.
- 2) Turn the small **FMS** Knob to select the desired runway.
- 3) Press the **FMS** Knob to remove the flashing cursor.

The 'Nearest Airports' Box on the 'Aux – System Setup 1' Page defines the minimum runway length and surface type used when determining the 25 nearest airports to display on the MFD 'NRST – Nearest Airports' Page. A minimum runway length and/or surface type can be entered to prevent airports with small runways or runways that are not appropriately surfaced from being displayed. Default settings are 3000 feet (or meters) for runway length and "Hard Only" for runway surface type.

Selecting nearest airport surface and minimum runway length matching criteria:

- 1) Use the **FMS** Knob to select the 'Aux – System Setup 1' Page.
- 2) Press the **FMS** Knob momentarily to activate the flashing cursor.
- 3) Turn the large **FMS** Knob to highlight the 'Runway Surface' Field in the 'Nearest Airport' Box.
- 4) Turn the small **FMS** Knob to select the desired runway option (Any, Hard Only, Hard/ Soft).
- 5) Press the **ENT** Key. The cursor moves to the 'Minimum Length' Field in the 'Nearest Airport' Box.
- 6) Use the **FMS** Knob to enter the minimum runway length (zero to 25,000 feet) and press the **ENT** Key.
- 7) Press the **FMS** Knob to remove the flashing cursor.

NON-AIRPORT WAYPOINTS**WAYPOINT INFORMATION**

Non-Airport Waypoints are considered to be Intersections, VORs, NDBs, VRPs, and User Waypoints. For each of these waypoints, their respective information pages will show a map of the currently selected waypoint, the waypoint identifier, and location. Additionally, intersections will show the nearest VOR while both the VOR and NDB waypoints will show their frequency and the nearest airport. User Waypoint information also provides the waypoint type (radial/radial, radial/DME, or latitude/longitude), temporary status, comments, and a User Waypoint list.

The 'VOR Information' Page can be used to view information about VOR and ILS signals (since ILS signals can be received on a NAV receiver), or to quickly tune a VOR or ILS frequency. If a VOR station is combined with a TACAN station it is listed as a VOR-TACAN on the 'VOR Information' Page and if it includes only DME, it is displayed as VOR-DME. Also, the VOR class (Low Altitude, High Altitude, and Terminal) will be shown in the VOR 'Information' Box.

The system can create and store up to 1,000 user-defined waypoints. User waypoints can be created from any map page (except PFD Inset Map, 'Aux – Trip Planning' Page, or Procedure Pages) by selecting a position on the map using the **Joystick**, or from the 'WPT – User WPT Information' Page by referencing a bearing/distance from an existing waypoint, bearings from two existing waypoints, or a latitude and longitude. Once a waypoint has been created, it can be renamed, deleted, or moved. Temporary user waypoints are erased upon system power down.



NOTE: The VOR displayed on the 'WPT – Intersection Information' Page is the nearest VOR, not necessarily the VOR used to define the intersection.

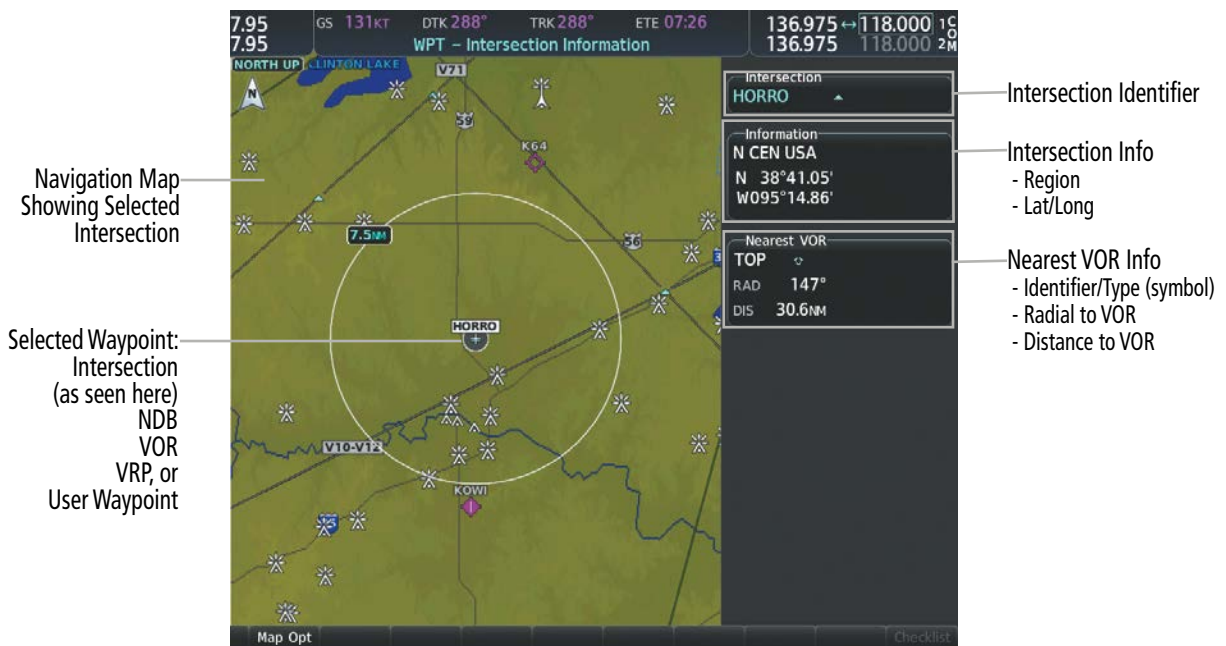


Figure 5-29 Non-Airport Waypoint Information Page (Intersection Example)

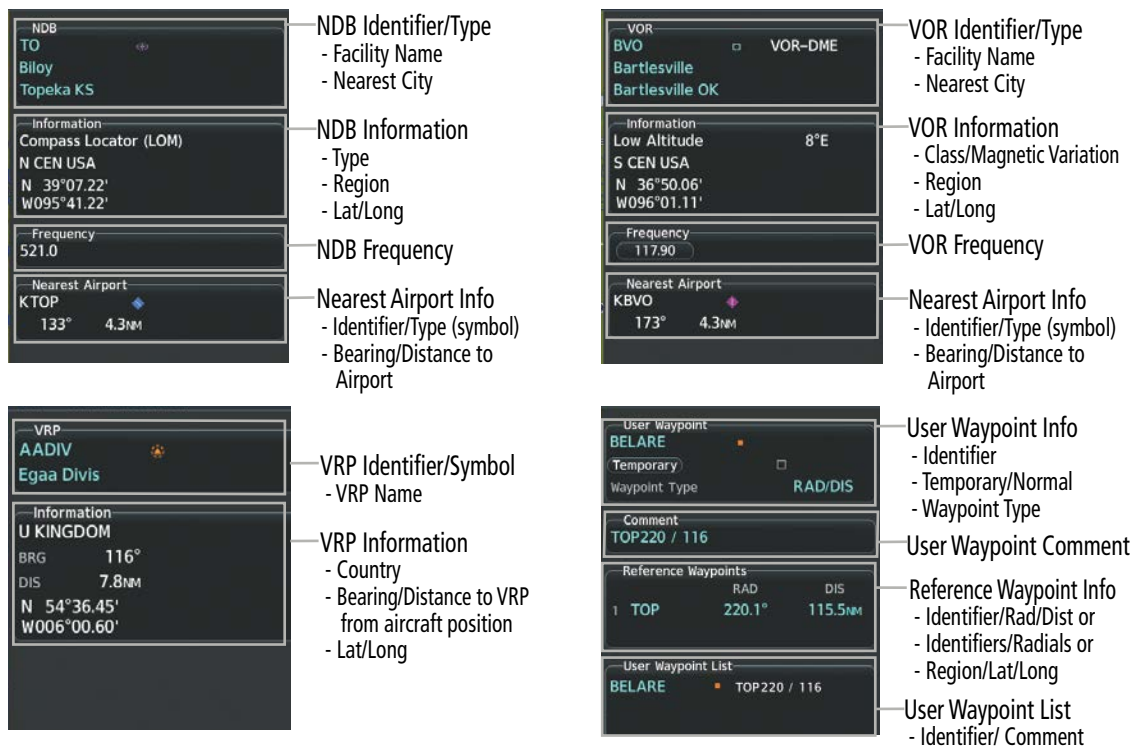


Figure 5-30 Non-Airport Waypoint Information Pages (NDB, VOR, VRP, and User Waypoint)

Viewing Non-Airport Waypoints:

- 1) Turn the large **FMS** Knob to select the 'WPT' Page Group.
- 2) Turn the small **FMS** Knob to select the 'WPT – (Intersection, NDB, VOR, VRP, or User WPT) Information' Page.
- 3) Press the **FMS** Knob to display the flashing cursor in the Intersection, NDB, VOR, VRP, or User Waypoint Box.
- 4) Use the **FMS** Knobs and enter an identifier, facility name, or location.
- 5) Press the **ENT** Key, if needed.
- 6) Press the **FMS** Knob to remove the flashing cursor.

NEAREST NON-AIRPORT WAYPOINTS

The Nearest pages can be used to quickly find waypoints close to the aircraft. The system will display a scrollable list of up to 25 nearest waypoints with bearing and distance from the aircraft, a map of the surrounding area, and additional information particular to the type of waypoint chosen. A white arrow before the waypoint identifier/name indicates the currently selected waypoint shown on the map, with its associated information in the lower box or boxes:

» The 'NRST – Nearest Intersection' Page will show three boxes labeled 'Nearest INT', 'Information', and a 'Reference VOR'.

- » The 'NRST – Nearest NDB' Page will show three boxes labeled 'Nearest NDB', 'Information', and 'Frequency'. The NDB 'Information' Box will show a Compass Locator if the NDB is associated with either a Locator Outer Marker (LOM) or Locator Middle Marker (LMM).
- » The 'NRST – Nearest VOR' Page will show three boxes labeled 'Nearest VOR', 'Information', and 'Frequency'. The NAV frequency from a selected VOR station can be loaded from the 'NRST – Nearest VOR' Page via the **FREQ** Softkey. See the Audio & CNS Section for more information.
- » The 'NRST – Nearest VRP' Page will show two boxes labeled 'Nearest VRP' and 'Information'. Information will contain the VRP Name, Country and latitude/longitude.
- » The 'NRST – Nearest User WPTS' Page will show three boxes labeled 'Nearest User', 'Information', and 'Reference Waypoints'. Information will include any Comments and the latitude/longitude. The 'Reference Waypoints' Box will provide a reference NAVAID with a radial/DME that coincides with the User Waypoint. The nearest waypoint list will only include waypoints within 200nm. If there are no waypoints in the list, text indicating that there are no nearest waypoints will be displayed, and the information and frequency fields (if applicable) will be dashed.

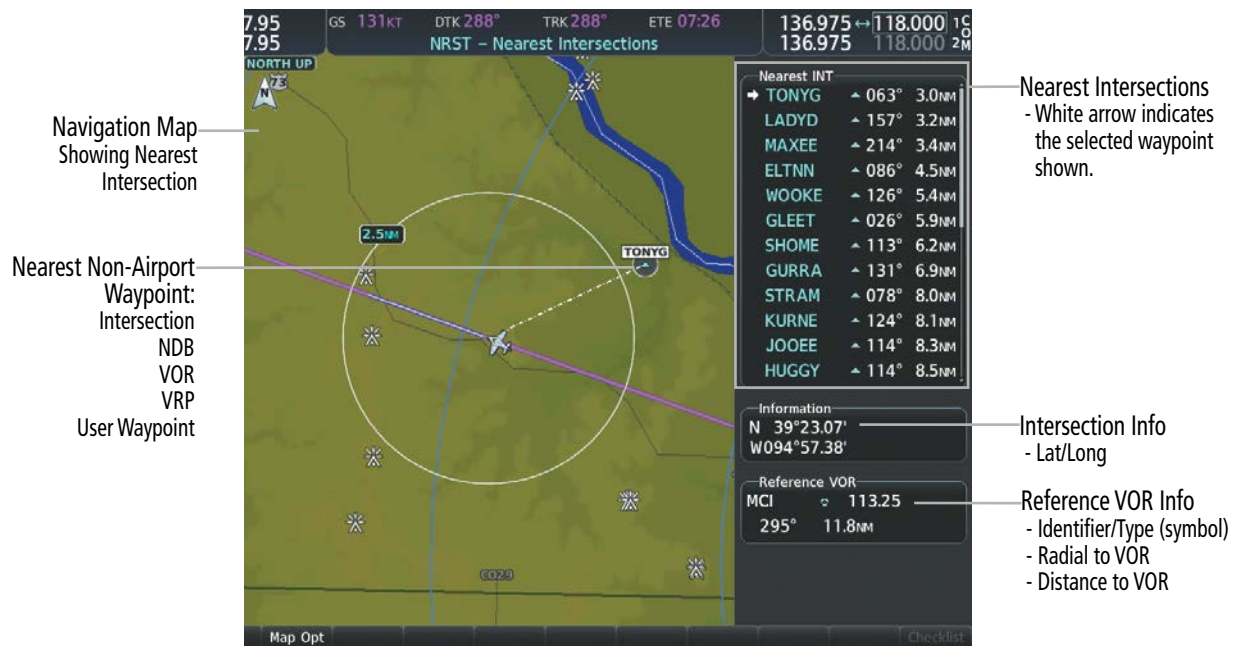


Figure 5-31 Nearest Intersection



Figure 5-32 Nearest Non-Airport Waypoints (NDB, VOR, VRP, and User WPTS)

Viewing Nearest Non-Airport Waypoints:

- 1) Turn the large **FMS** Knob to select the 'NRST' Page Group.
- 2) Turn the small **FMS** Knob to select the 'NRST – Nearest Intersections, NDB, VOR, VRP, or User WPTS' Page.
- 3) Press the **FMS** Knob to display the flashing cursor in the 'Nearest INT, NDB, VOR, VRP, or User' Box,

Or:

If the 'NRST – Nearest VOR' Page is displayed, to display the flashing cursor:

Press the **VOR** Softkey.

Or:

- a) Press the **MENU** Key
- b) Highlight 'Select VOR Window', and press the **ENT** Key.
- 4) If needed, press the **ENT** Key or turn either **FMS** Knob as needed to select an identifier.
- 5) Press the **FMS** Knob to remove the flashing cursor.

CREATING USER WAYPOINTS

User waypoints can be created from the 'WPT – User WPT Information' Page in the following ways:

Creating user waypoints from the 'WPT – User WPT Information' Page:

- 1) Press the **New** Softkey, or press the **MENU** Key and select 'Create New User Waypoint'.
- 2) Enter a user waypoint name (up to six characters).
- 3) Press the **ENT** Key. The current aircraft position is the default location of the new waypoint.
- 4) If desired, define the type and location of the waypoint in one of the following ways:

Select "RAD/RAD" using the small **FMS** Knob, press the **ENT** Key, and enter the two reference waypoint identifiers and radials into the 'Reference Waypoints' Window using the **FMS** Knobs.

Or:

Select "RAD/DIS" using the small **FMS** Knob, press the **ENT** Key, and enter the reference waypoint identifier, the radial, and the distance into the 'Reference Waypoints' Window using the **FMS** Knobs.

Or:

Select "LAT/LON" using the small **FMS** Knob, press the **ENT** Key, and enter the latitude and longitude into the 'Information' Window using the **FMS** Knobs.
- 5) Press the **ENT** Key to accept the new waypoint.
- 6) If desired, change the storage method of the waypoint to temporary or normal by moving the cursor to "Temporary" and pressing the **ENT** Key to check or uncheck the box.
- 7) Press the **FMS** Knob to remove the flashing cursor.

Or:

- 1) Press the **FMS** Knob to activate the cursor.
- 2) Enter a user waypoint name (up to six characters).
- 3) Press the **ENT** Key. The message 'Are you sure you want to create the new User Waypoint AAAAAA?' is displayed.
- 4) With 'Yes' highlighted, press the **ENT** Key.
- 5) If desired, define the type and location of the waypoint in one of the following ways:

Select "RAD/RAD" using the small **FMS** Knob, press the **ENT** Key, and enter the two reference waypoint identifiers and radials into the 'Reference Waypoints' Window using the **FMS** Knobs.

Or:

Select "RAD/DIS" using the small **FMS** Knob, press the **ENT** Key, and enter the reference waypoint identifier, the radial, and the distance into the 'Reference Waypoints' Window using the **FMS** Knobs.

Or:

Select "LAT/LON" using the small **FMS** Knob, press the **ENT** Key, and enter the latitude and longitude into the 'Information' Window using the **FMS** Knobs.

- 6) Press the **ENT** Key to accept the new waypoint.
- 7) If desired, change the storage method of the waypoint to temporary or normal by moving the cursor to "Temporary" and pressing the **ENT** Key to check or uncheck the box.
- 8) Press the **FMS** Knob to remove the flashing cursor.

Creating user waypoints from map pages:

- 1) Push the **Joystick** to activate the panning function and pan to the map location of the desired user waypoint.
- 2) Press the **ENT** Key. The 'WPT – User WPT Information' Page is displayed with the captured position.



NOTE: If the pointer has highlighted a map database feature, one of three things happens upon pressing the **ENT** Key: 1) information about the selected feature is displayed instead of initiating a new waypoint, 2) a menu pops up allowing a choice between 'Review Airspaces' or 'Create User Waypoint', or 3) a new waypoint is initiated with the default name being the selected map item.

- 3) Enter a user waypoint name (up to six characters).
- 4) Press the **ENT** Key to accept the selected name.
- 5) If desired, define the type and location of the waypoint in one of the following ways:

Select "RAD/RAD" using the small **FMS** Knob, press the **ENT** Key, and enter the two reference waypoint identifiers and radials into the 'Reference Waypoints' Window using the **FMS** Knobs.

Or:

Select "RAD/DIS" using the small **FMS** Knob, press the **ENT** Key, and enter the reference waypoint identifier, the radial, and the distance into the 'Reference Waypoints' Window using the **FMS** Knobs.

Or:

Select "LAT/LON" using the small **FMS** Knob, press the **ENT** Key, and enter the latitude and longitude into the 'Information' Window using the **FMS** Knobs.

- 6) Press the **ENT** Key to accept the new waypoint.
- 7) If desired, change the storage method of the waypoint to temporary or normal by moving the cursor to "Temporary" and pressing the **ENT** Key to check or uncheck the box.
- 8) Press the **FMS** Knob to remove the flashing cursor.
- 9) Press the **Go Back** Softkey to return to the map page.

EDITING USER WAYPOINTS

Once a user waypoint has been created, it may be edited, renamed, or deleted. A system generated comment for a user waypoint incorporates the reference waypoint identifier, bearing, and distance. If a system generated comment has been edited, a new comment can be generated.

The default type of user waypoint (normal or temporary) can be changed using the 'WPT — User Waypoint Information' 'Page Menu' Window. Temporary user waypoints are automatically deleted upon the next power cycle.

Editing a user waypoint comment or location:

- 1) With the 'WPT — User WPT Information' Page displayed, press the **FMS** Knob to activate the cursor.
- 2) Select a user waypoint in the 'User Waypoint List' Box, if required, and press the **ENT** Key.
- 3) Move the cursor to the desired field.
- 4) Turn the small **FMS** Knob to make any changes.
- 5) Press the **ENT** Key to accept the changes.
- 6) Press the **FMS** Knob to remove the flashing cursor.

Changing the user waypoint storage duration default setting:

- 1) With the 'WPT — User WPT Information' Page displayed, press the **MENU** Key.
- 2) Move the cursor to select 'Waypoint Setup', and press the **ENT** Key.
- 3) Select 'Normal' or 'Temporary' as desired, and press the **ENT** Key.
- 4) Press the **FMS** Knob to remove the flashing cursor and return to the 'WPT — User WPT Information' Page.

DELETING USER WAYPOINTS

Deleting a single user waypoint:

- 1) With the 'WPT – User WPT Information' Page displayed, highlight a User Waypoint in the 'User Waypoint List' Box, or enter a waypoint in the 'User Waypoint' Box.
- 2) Press the **Delete** Softkey or press the **CLR** Key. 'Yes' is highlighted in the confirmation window.
- 3) Press the **ENT** Key.
- 4) Press the **FMS** Knob to remove the flashing cursor.

Or:

- 1) With the 'WPT – User WPT Information' Page displayed, highlight a User Waypoint in the 'User Waypoint List' Box, or enter a waypoint in the 'User Waypoint' Box.
- 2) Press the **MENU** Key.
- 3) Select 'Delete User Waypoint'.
- 4) Press the **ENT** Key twice to confirm the selection.
- 5) Press the **FMS** Knob to remove the flashing cursor.



NOTE: The option to 'Delete All User Waypoints' is not available while the aircraft is in flight.

Deleting all user waypoints:

- 1) With the 'WPT – User WPT Information' Page displayed, highlight a User Waypoint in the 'User Waypoint List' Box.
- 2) Press the **MENU** Key.
- 3) Select 'Delete All User Waypoints.'
- 4) Press the **ENT** Key twice to confirm the selection.
- 5) Press the **FMS** Knob to remove the flashing cursor.

5.4 AIRSPACES

The system can display the following types of airspaces: Class B, TMA, and Airways surrounding TMA, Class C, CTA, Class A, Class D, Restricted (Prohibited), MOA (Military), and other airspace provided by the navigation database. Some examples of typical airspaces are depicted below. See Table 5-3 for the maximum ranges for each type of airspace and the symbol used to define the airspace area. Temporary Flight Restrictions (TFRs) are discussed in the Hazard Avoidance Section.

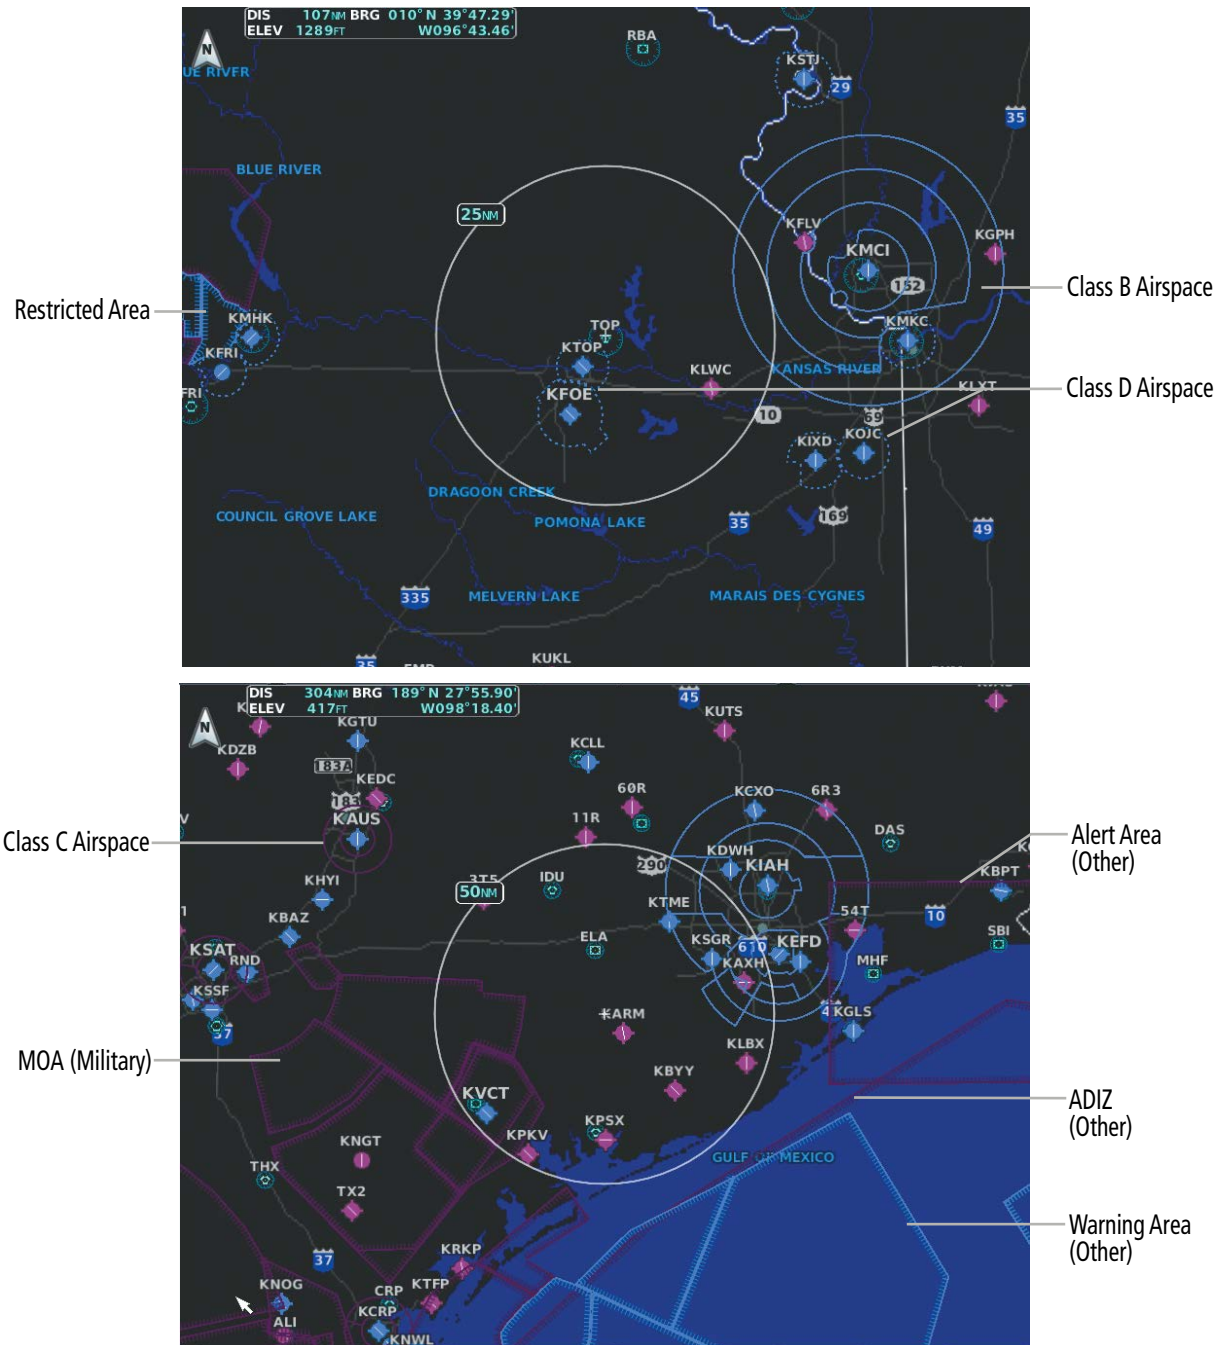


Figure 5-33 Airspaces

Displaying and removing airspace altitude labels:

- 1) Press the **MENU** Key with the 'Map – Navigation Map' Page displayed. The cursor flashes on the 'Map Settings' option.
- 2) Press the **ENT** Key. The 'Map Settings' Window is displayed.
- 3) Turn the small **FMS** Knob to select the 'Airspace' Group, if necessary, and press the **ENT** Key.
- 4) Turn the large **FMS** Knob to select the 'Airspace ALT LBL' Field.
- 5) Turn the small **FMS** Knob to select 'On' to display labels and 'Off' to remove labels.
- 6) Press the **FMS** Knob to return to the 'Map – Navigation Map' Page.

NEAREST AIRSPACE**SETTING AIRSPACE ALERTS**

The 'Airspace Alerts' Box ('Aux – System Setup 1' Page) on the MFD allows the pilot to turn the controlled/special-use airspace message alerts on or off. This does not affect the alerts listed on the 'NRST – Nearest Airspaces' Page or the airspace boundaries depicted on the 'Map – Navigation Map' Page. It simply turns on/off the message provided in the 'Alerts' Window on the PFD when the aircraft is approaching or near an airspace.

Pressing the PFD **Alerts/Message** Softkey displays the 'Alerts' Window on the PFD. The following airspace alerts may be displayed in the 'Alerts' Window:

Message	Comments
INSIDE ARSPC – Inside airspace.	The aircraft is inside the airspace.
ARSPC AHEAD – Airspace ahead – less than 10 minutes.	Special use airspace is ahead of aircraft. The aircraft penetrates the airspace within 10 minutes.
ARSPC NEAR – Airspace near and ahead.	Special use airspace is near and ahead of the aircraft position.
ARSPC NEAR – Airspace near – less than 2 nm.	Special use airspace is within 2 nm of the aircraft position.

Table 5-7 PFD Airspace Alert Messages

An altitude buffer is also provided which "expands" the vertical range above or below an airspace. For example, if the buffer is set at 500 feet, and the aircraft is more than 500 feet above/below an airspace, an alert message is not generated, but if the aircraft is less than 500 feet above/below an airspace and projected to enter it, the pilot is notified with an alert message. The default setting for the altitude buffer is 200 feet.

Turning an airspace alert on or off:

- 1) Use the **FMS** Knob to select the 'Aux – System Setup 1' Page (**Setup 1** Softkey).
- 2) Press the **FMS** Knob momentarily to activate the flashing cursor.
- 3) Turn the large **FMS** Knob to highlight the desired field in the 'Airspace Alerts' Box.
- 4) Turn the small **FMS** Knob clockwise to turn the airspace alert On or counterclockwise to turn the alert Off.
- 5) Press the **FMS** Knob to remove the flashing cursor.

Changing the altitude buffer distance setting:

- 1) Use the **FMS** Knob to select the 'Aux – System Setup 1' Page (**Setup 1** Softkey).
- 2) Press the **FMS** Knob momentarily to activate the flashing cursor.
- 3) Turn the large **FMS** Knob to highlight the 'Altitude Buffer' Field in the 'Airspace Alerts' Box.
- 4) Use the **FMS** Knob to enter an altitude buffer value and press the **ENT** Key.
- 5) Press the **FMS** Knob to remove the flashing cursor.

VIEWING NEAREST AIRSPACE INFORMATION

The 'NRST – Nearest Airspaces' Page can be used to quickly find airspaces close to the flight path. In addition, a selected frequency associated with the airspace can be loaded from the 'NRST – Nearest Airspaces' Page. In addition to displaying a map of airspace boundaries and surrounding area, the 'NRST – Nearest Airspaces' Page displays airspace information in four boxes labelled 'Airspace Alerts', 'Airspace Agency', 'Vertical Limits', and 'Frequencies'.

Airspace alerts and associated frequencies are shown in scrollable lists on the 'NRST – Nearest Airspaces' Page. The **Alerts** and **FREQ** Softkeys place the cursor in the respective list. The **FREQ** Softkey is enabled only if one or more frequencies exist for a selected airspace.

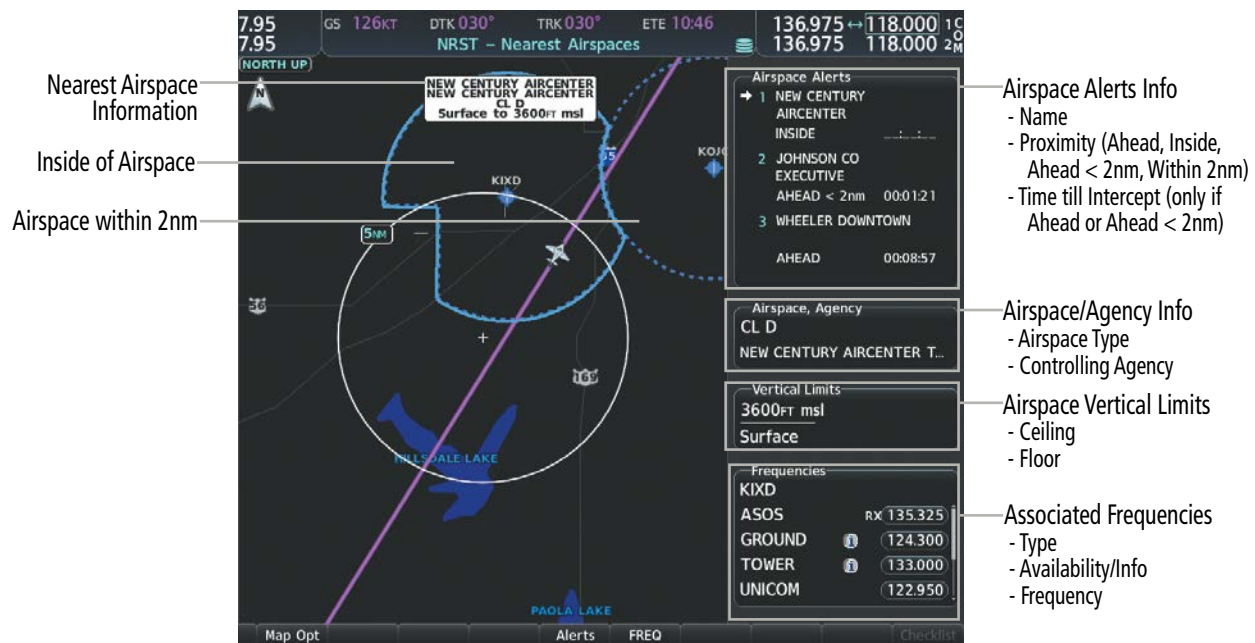


Figure 5-34 Nearest Airspaces

Selecting and viewing an airspace alert with its associated information:

- 1) Use the **FMS** Knob to select the 'NRST – Nearest Airspaces' Page.
- 2) Press the **Alerts** Softkey on the MFD; or press the **FMS** Knob; or press the **MENU** Key, highlight 'Select Alerts Window', and press the **ENT** Key. The cursor is placed in the 'Airspace Alerts' Box.
- 3) Select the desired airspace.
- 4) Press the **FMS** Knob to remove the flashing cursor.

The Smart Airspace function de-emphasizes airspaces above or below the current aircraft altitude. The function does not require the aircraft present position or flight path to enter the lateral boundaries of the airspace. If the current aircraft altitude is within 1100 feet of the vertical boundaries of the airspace, the airspace boundary is shown normally. If the current aircraft altitude is not within 1100 feet of the vertical boundaries of the airspace, the airspace boundary is shown subdued.



Figure 5-35 Smart Airspace

- 1) Use the **FMS** Knob to select the 'Map – Navigation Map' Page.
- 2) Press the **MENU** Key, and press the **ENT** Key. The 'Map Settings' Window is displayed
- 3) Turn the small **FMS** Knob to highlight the 'Airspace' and press the **ENT** Key.
- 4) Turn the large **FMS** Knob to highlight the 'Smart Airspace' Field.
- 5) Turn the small **FMS** Knob clockwise to turn smart airspace On or counterclockwise to turn smart airspace Off.
- 6) Press the **FMS** Knob to remove the flashing cursor.

5.5 DIRECT-TO NAVIGATION

The Direct-to method of navigation, initiated by pressing the **→** Key on either the MFD Controller or the PFD, is quicker to use than a flight plan when the desire is to navigate to a single point such as a nearby airport.

Once a direct-to is activated, the system establishes a point-to-point course line from the present position to the selected direct-to destination. Course guidance is provided until the direct-to is replaced with a new direct-to or flight plan, or cancelled.

A vertical navigation (VNV) direct-to creates a descent path (and provides guidance to stay on the path) from the current altitude to a selected altitude at the direct-to waypoint. Vertical navigation is based on barometric altitudes, not on GPS altitude, and is used for cruise and descent phases of flight.

The Direct-to Window allows selection and activation of direct-to navigation. The 'Direct To' Window displays selected direct-to waypoint data on the PFD and the MFD.



Figure 5-36 'Direct To' Window - MFD

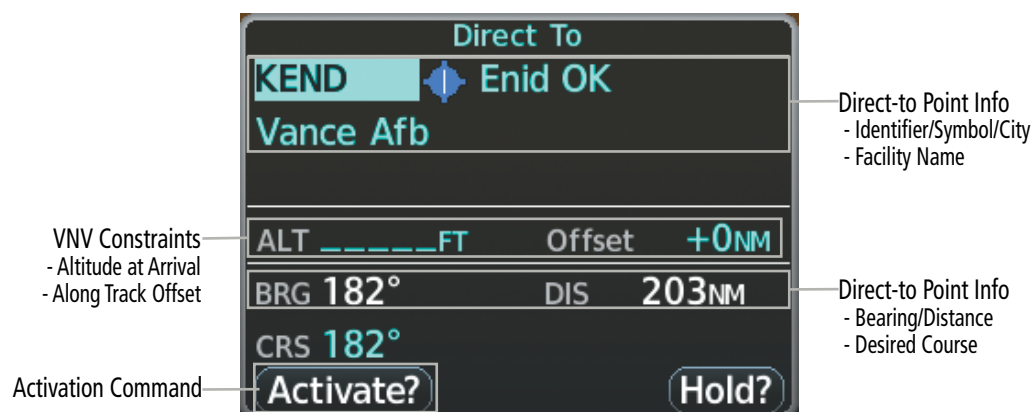


Figure 5-37 'Direct To' Window - PFD

Any waypoint can be entered as a direct-to destination from the 'Direct To' Window. Also, any waypoint contained in the active flight plan can be selected as a direct-to waypoint from the 'Direct To' Window, the 'FPL – Active Flight Plan' Page, or the active 'Flight Plan' Window.



NOTE: In some cases, Origin and Destination airports may not be displayed in the PFD "Flight Plan" or "Recent" submenu or the MFD 'WPT – Airport Information' Page until the airport waypoint is loaded into the flight plan.

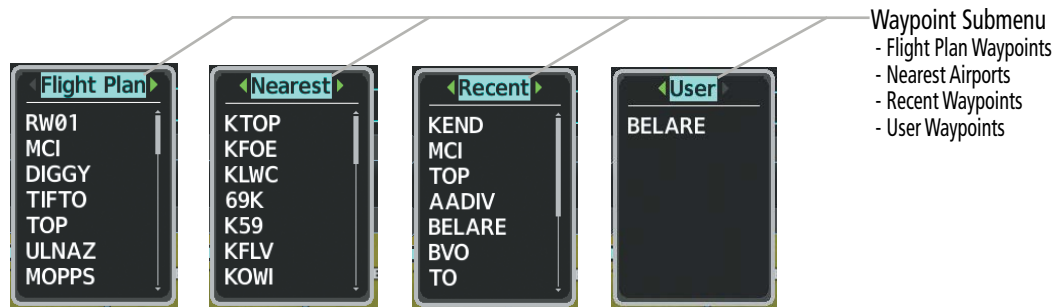


Figure 5-38 Waypoint Submenu

The 'Direct To' Window can be displayed from any page and allows selection and activation of direct-to navigation. If the direct-to is initiated from any page except the WPT pages, the default waypoint is the active flight plan waypoint (if a flight plan is active) or a blank waypoint field. Direct-to requests on any WPT page defaults to the displayed waypoint.

When navigating a direct-to, the system sets a direct great circle course to the selected destination. The course to a destination can also be manually selected using the 'CRS' or 'Course' Field on the 'Direct To' Window.

Entering a waypoint identifier, facility name, or city as a direct-to destination:

- 1) Press the **➔** Key. The 'Direct To' Window is displayed (with the active flight plan waypoint as the default selection or a blank waypoint field if no flight plan is active).
- 2) Turn the small **FMS** Knob clockwise to begin entering a waypoint identifier (turning it counter-clockwise brings up the waypoint selection submenu - press the **CLR** Key to remove it), or turn the large **FMS** Knob to select the facility name, or city field and turn the small **FMS** Knob to begin entering a facility name or city. If duplicate entries exist for the entered facility or city name, additional entries can be viewed by turning the small **FMS** Knob during the selection process.
- 3) Press the **ENT** Key. 'Activate?' is highlighted.
- 4) Press the **ENT** Key to activate the direct-to.

Selecting an active flight plan waypoint as a direct-to destination:

- 1) While navigating an active flight plan, press the **➔** Key. The 'Direct To' Window is displayed with the active flight plan waypoint as the default selection.
- 2) Turn the small **FMS** Knob counter-clockwise to display a list of flight plan waypoints (turning the knob counter-clockwise displays the waypoint submenu window).

- 3) Select the desired waypoint.
- 4) Press the **ENT** Key. The cursor is now displayed on 'Activate?'.
- 5) Press the **ENT** Key again to activate the direct-to.

Or:

- 1) Select the 'FPL – Active Flight Plan' Page on the MFD, or the 'Flight Plan' Window on the PFD.
- 2) Press the **FMS** Knob to activate the cursor (not required on PFD), and turn the large **FMS** Knob to highlight the desired waypoint.
- 3) Press the **→** Key.
- 4) Press the **ENT** Key. The cursor is now displayed on 'Activate?'.
- 5) Press the **ENT** Key again to activate the direct-to.

Selecting a Nearest, Recent or User waypoint as a direct-to destination:

- 1) Press the **→** Key. The 'Direct To' Window is displayed (with the active flight plan destination as the default selection or a blank destination if no flight plan is active).
- 2) Turn the small **FMS** Knob counter-clockwise to display the waypoint submenu window.
- 3) Turn the small **FMS** Knob clockwise to display the Nearest, Recent or User waypoints.
- 4) Turn the large **FMS** Knob clockwise to select the desired waypoint.
- 5) Press the **ENT** Key. The cursor is now displayed on 'Activate?'.
- 6) Press the **ENT** Key again to activate the direct-to.

Selecting any waypoint as a direct-to destination:

- 1) Select the page or window containing the desired waypoint type and select the desired waypoint.
- 2) Press the **→** Key to display the 'Direct To' Window with the selected waypoint as the direct-to destination.
- 3) Press the **ENT** Key. The cursor is now displayed on 'Activate?'.
- 4) Press **ENT** again to activate the direct-to.

Selecting a nearby airport as a direct-to destination:

- 1) Press the **Nearest** Softkey on the PFD; or turn the **FMS** Knob to display the 'NRST – Nearest Airports' Page on the MFD and press the **FMS** Knob.
- 2) Use the **FMS** Knob to select the desired airport (the nearest one is already selected).
- 3) Press the **→** Key.
- 4) Press the **ENT** Key. The cursor is now displayed on 'Activate?'.
- 5) Press the **ENT** Key again to activate the direct-to.

Selecting a manual direct-to course:

- 1) Press the **→** Key. The 'Direct To' Window is displayed.
- 2) Turn the large FMS Knob to highlight the 'CRS' or 'Course' Field.
- 3) Use the small FMS Knob to enter the desired course.
- 4) Press the **ENT** Key. The cursor is now displayed on 'Activate?'.
- 5) Press the **ENT** Key again to activate the direct-to.

Reselecting the direct course from the current position:

- 1) Press the **→** Key. The 'Direct To' Window is displayed.
- 2) Press the **ENT** Key. The cursor is now displayed on 'Activate?'.
- 3) Press the **ENT** Key again to activate the direct-to.

Direct-to destinations may also be selected by using the pointer on the 'Map – Navigation Map' Page. If no airport, NAVAID, or user waypoint exists at the desired location, a temporary waypoint named 'MAPWPT' is automatically created at the location of the map arrow.

Selecting a waypoint as a direct-to destination using the pointer:

- 1) From a navigation map page, push the **Joystick** to display the pointer.
- 2) Move the **Joystick** to place the pointer at the desired destination location.
- 3) If the pointer is placed on an existing airport, NAVAID, VRP, or user waypoint, the waypoint name is highlighted.
- 4) Press the **→** Key to display the 'Direct To' Window with the selected point entered as the direct-to destination.
- 5) Press the **ENT** Key. The cursor is now displayed on 'Activate?'.
- 6) Press the **ENT** Key again to activate the direct-to.

Cancelling a Direct-to:

- 1) Press the **→** Key to display the 'Direct To' Window.
- 2) Press the **MENU** Key.
- 3) With 'Cancel Direct-To NAV' highlighted, press the **ENT** Key. If a flight plan is still active, the system resumes navigating the flight plan along the closest leg.

A direct-to with altitude constraints creates a descent path (and provides guidance to stay on the path) from the aircraft's current altitude to the altitude of the direct-to waypoint. The altitude is reached at the waypoint, or at the specified distance along the flight path if an offset distance has been entered. All VNV altitudes prior to the direct-to destination are removed from the active flight plan upon successful activation of a direct-to destination that is part of the active flight plan. All VNV altitudes following the direct-to waypoint are retained. See the section on Vertical Navigation for more information regarding the use and purpose of VNV altitudes and offset distances.

Entering a VNV altitude and along-track offset for the waypoint:

- 1) Press the **→** Key to display the 'Direct To' Window.
- 2) Turn the large **FMS** Knob to place the cursor in the altitude field ('VNV' or 'ALT').
- 3) Enter the desired altitude.
- 4) Press the **ENT** Key to accept the altitude constraint; if the selected waypoint is an airport, an additional choice is displayed. Turn the small **FMS** Knob to choose 'MSL' or 'AGL', and press the **ENT** Key to accept the altitude.
- 5) The cursor is now flashing in offset distance field.
- 6) Enter the desired along-track distance before the waypoint.
- 7) Press the **ENT** Key. 'Activate?' is highlighted.
- 8) Press the **ENT** Key to activate.

Removing a VNV altitude constraint:

- 1) Press the **→** Key to display the 'Direct To' Window.
- 2) Press the **MENU** Key.
- 3) With 'Clear Vertical Constraints' highlighted, press the **ENT** Key.

5.6 FLIGHT PLANNING

FLIGHT PLAN INFORMATION

Flight planning on the system consists of building a flight plan by entering waypoints one at a time, adding waypoints along airways, and inserting departures, airways, arrivals, or approaches as needed. The system allows flight planning information to be entered from either the MFD or PFD. The flight plan is displayed on maps using different line widths, colors, and types, based on the type of leg and the segment of the flight plan currently being flown (departure, enroute, arrival, approach, or missed approach).

Flight Plan Leg Type	Symbol
Active Course Leg*	
Active Heading Leg*	
Active Roll Steering Path*†	
Course Leg in the current flight segment	
Course Leg not in the current flight segment	
Heading Leg	
Roll Steering Path †	
Future Roll Steering Path ‡	
Turn Anticipation Arc	

* The active leg or path is the one currently being flown, and is shown in magenta.
† A roll steering path is a computed transitions between two disconnected legs.
‡ A roll steering path in the flight plan that is beyond the next leg appears as a future roll steering path. When a future roll steering path becomes the next leg in the flight plan, it appears as a roll steering path.

Table 5-8 Flight Plan Leg Symbols

Up to 99 flight plans with up to 100 waypoints each can be created and stored in memory. After applying power, the previously active flight plan is retained and automatically repopulated if the aircraft position is at the origin airport and the aircraft is on the ground. If, however, the aircraft is not within 5 nm of the airport origin, on the ground, or if more than 12 hours have passed since the last active flight plan modification, the previously active flight plan is not retained. One flight plan can be activated at a time and becomes the active flight plan. The active flight plan is overwritten when another flight plan is activated. When storing flight plans with an approach, departure, or arrival, the system uses the waypoint information from the current database to define the waypoints. If the database is changed or updated, the system automatically updates the information if the procedure has not been modified. If an approach, departure, or arrival procedure is no longer available,

the procedure is deleted from the affected stored flight plan(s), and an alert is displayed (see Miscellaneous Messages in Appendix A) advising that one or more stored flight plans need to be edited.

Whenever an approach, departure, or arrival procedure is loaded into the active flight plan, a set of approach, departure, or arrival waypoints is inserted into the flight plan along with a header line describing the instrument procedure the pilot selected. The original enroute portion of the flight plan remains active (unless an instrument procedure is activated) when the procedure is loaded.

When the database is updated, the airways need to be reloaded also. Each airway segment is reloaded from the database given the entry waypoint, the airway identifier and the exit waypoint. This reloads the sequence of waypoints between the entry and exit waypoints (the sequence may change when the database is updated). The update of an airway can fail during this process. If that happens, the airway waypoints are changed to regular (non-airway) flight plan waypoints, and an alert is displayed (see Miscellaneous Messages in Appendix A).

The following could cause the airway update to fail:

- Airway identifier, entry waypoint or exit waypoint not found in the new database.
- Airway entry/exit waypoint is not an acceptable waypoint for the airway – either the waypoint is no longer on the airway, or there is a new directional restriction that prevents it being used.
- Loading the new airway sequence would exceed the capacity of the flight plan.

There are three methods to create or modify a flight plan:

- 'FPL - Active Flight Plan' Page on the MFD (create/modify the active flight plan)
- 'Flight Plan' Window on the PFD (create/modify the active flight plan)
- 'FPL - Flight Plan Catalog' Page on the MFD (create/modify a stored flight plan)



Figure 5-39 Active Flight Plan



Figure 5-40 Flight Plan Window on PFD

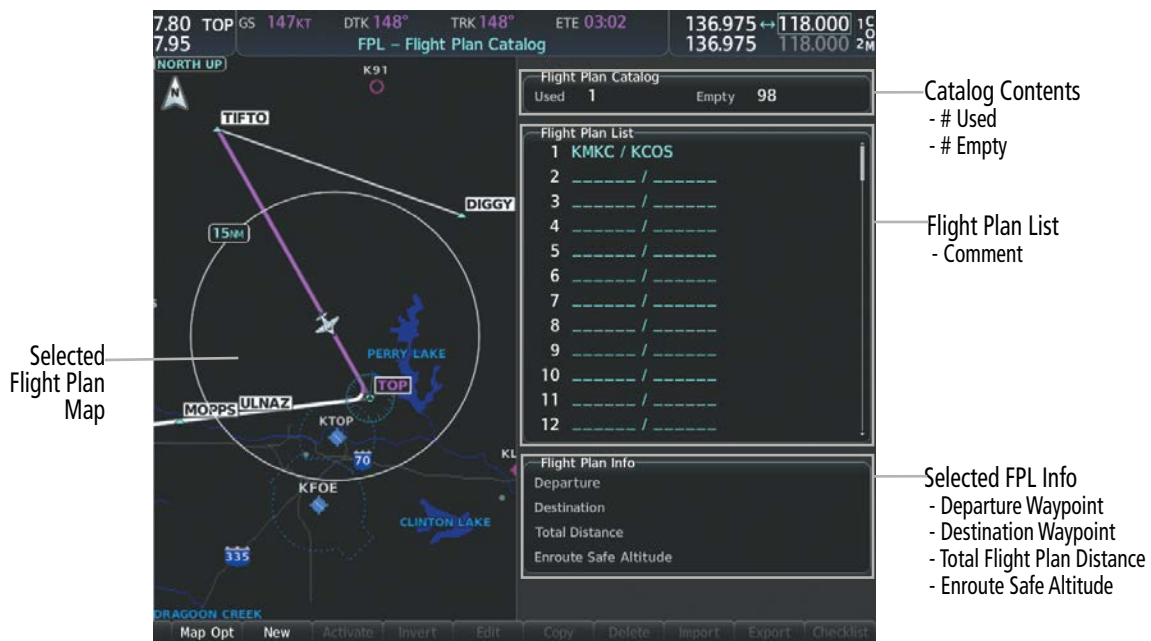


Figure 5-41 Flight Plan Catalog



NOTE: The system supports AFCS lateral guidance for all leg types (using NAV or FMS APPR mode). The system does not support course deviation for any heading leg types (VA, VD, VI, VM, or VR).

Auto-designation will determine the most likely airport of origin and auto-populate the Active Flight Plan. Once determined, the airfield identifier automatically appears in the 'Origin' Field and the line immediately below 'Origin' while keeping the runway ('RW') Field empty. The line below the Origin line serves as the first point in the flight plan.

Auto-designation occurs between 15 and 60 seconds after applying power under the following conditions:

- Aircraft position is known
- Aircraft is on the ground
- Nearest airport is within 200NM
- Flight plan is empty

If the pilot manually enters the origin, or any other leg of the flight plan before auto-designation occurs, nothing gets inserted automatically. The automatic insertion logic only runs once, so the pilot can edit the origin if the nearest airport is not the desired origin.

If the pilot enters a different airport into the first point of the flight plan, the Origin will change to this entry, and the pilot will be prompted to enter the departure runway.

Both the Origin airport/runway and the first point of the flight plan will be the same unless a departure is entered and a manual leg is inserted at the beginning of the loaded departure. Loading a departure locks in the origin information.



NOTE: In some cases, Origin and Destination airports may not be displayed in the PFD “Flight Plan” or “Recent” submenu or the MFD ‘WPT – Airport Information’ Page until the airport waypoint is loaded into the flight plan.

FLIGHT PLAN VIEWS

Flight plan information can be viewed in different locations and formats. The ‘FPL – Active Flight Plan’ Page format can be modified in several ways; flight plan profile information can be viewed on the Navigation Map VSD Inset; and the MFD Split Screen feature can provide different display configurations of the flight plan, navigation map and charts.

ACTIVE FLIGHT PLAN VIEWS

The ‘FPL – Active Flight Plan’ Page can be configured to show cumulative distance over the length of the flight plan or the distance for each leg of the flight plan; and it can be viewed in a narrow or wide view. In the wide view, additional information is displayed: Fuel Remaining (FUEL REM), Estimated Time Enroute (ETE), Estimated Time of Arrival (ETA), and Bearing to the waypoint (BRG).

Changing the flight plan view:


- 1) Press the **FPL** Key on the MFD to display the ‘FPL – Active Flight Plan’ Page.
- 2) Press the **View** Softkey to display the **Wide**, **Narrow**, **Leg-Leg**, and **CUM** Softkeys.
- 3) Press the **CUM** Softkey to view cumulative waypoint distance, or press the **Leg-Leg** Softkey to view leg-to-leg waypoint distance.
- 4) Press the **Wide** Softkey to display the wide view, or press the **Narrow** Softkey to display the narrow view.
- 5) Press the **Back** Softkey to return to the top level active flight plan softkeys.

SPLIT SCREEN


Charts may be viewed alongside the active flight plan in split screen mode. With an active flight plan loaded into the system, the charts page will automatically display a chart coinciding with the active flight plan leg. For more information on Charts, see the Additional Features Section.

Pressing the **Charts** Softkey from the 'FPL-Active Flight Plan' Page will remove the active flight plan map to display a Charts Pane alongside the 'Active Flight Plan' Pane. The Active Page Title will change to 'FPL – Chart + Active Flight Plan'. The active flight plan map can be re-displayed. However, displaying the map in split screen on the 'Active Flight Plan' Pane limits the flight plan content which can be displayed. For example, displaying the Flight Plan Map while in split screen narrow view removes the 'Active VNV Profile' Box. See the following figures depicting the different split screen displays with the active flight plan.

Display Title shows 'Chart + Active Flight Plan'

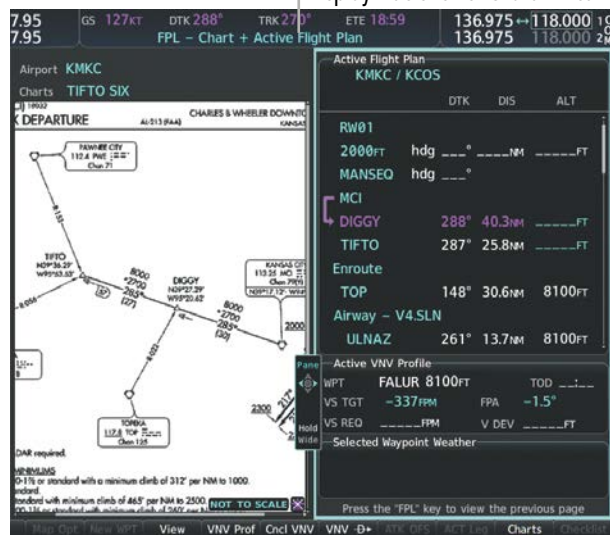


Split Screen Narrow View

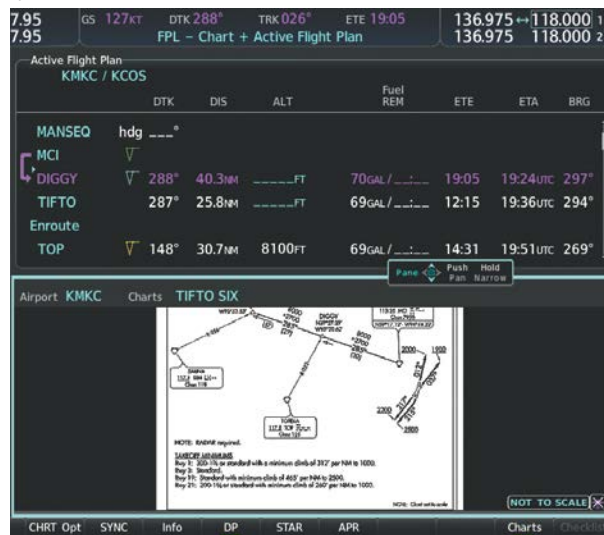


Split Screen Wide View

Figure 5-42 Split Screen Mode Narrow and Wide View

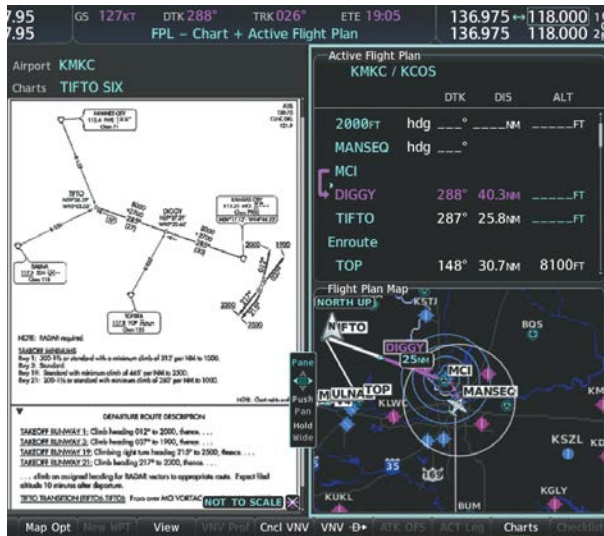

Split Screen Narrow View with Flight Plan Map

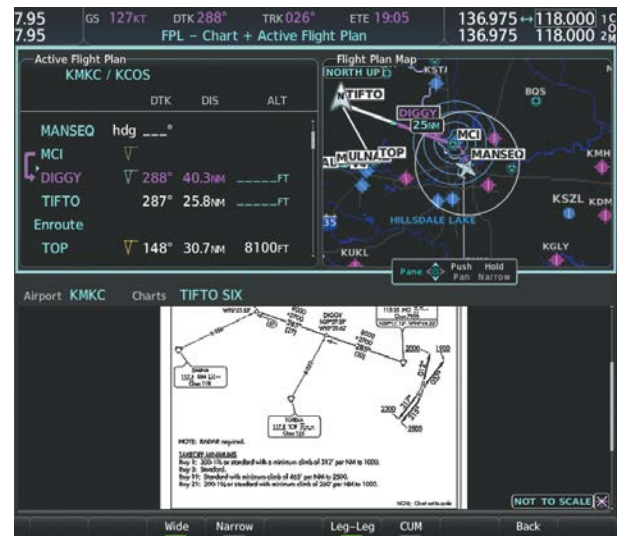

Split Screen Wide View with Flight Plan Map

Figure 5-43 Split Screen Mode with Flight Plan Map

Viewing charts and 'FPL – Active Flight Plan' Page in split screen mode:

- 1) Press the **FPL** Key for the MFD to display the 'FPL – Active Flight Plan' Page.
- 2) Press the **Charts** Softkey. If necessary, press the **CHRT Opt** Softkey and press the **Full SCN** Softkey to disable full screen mode. Split screen mode is now enabled showing two display panes. The Chart Pane is highlighted by a cyan box indicating it is the active pane.
- 3) To quickly view the chart corresponding to the active flight plan leg, press the **Sync** Softkey.

Displaying the flight plan map on the 'FPL – Active Flight Plan' Page in split screen mode:

- 1) Press the **FPL** Key for the MFD to display the 'FPL – Active Flight Plan' Page.
- 2) If necessary, press the **CHRT Opt** Softkey and press the **Full SCN** Softkey to disable full screen mode. Split screen mode is now enabled showing two display panes. The Chart Pane is highlighted by a cyan box indicating it is the active pane.
- 3) Move the **Joystick** to select the 'Active Flight Plan' Pane as the active display pane.
- 4) Press the **MENU** Key. 'Show Flight Plan Map' is highlighted. Press the **ENT** Key.
- 5) To remove the Flight Plan Map, press the **MENU** Key and select 'Hide Flight Plan Map'. Press the **ENT** Key.

CREATING A FLIGHT PLAN

The active flight plan is listed on the 'FPL – Active Flight Plan' Page on the MFD, and in the 'Flight Plan' Window on the PFD. It is the flight plan to which the system is currently providing guidance, and is shown on the navigation maps. Stored flight plans are listed on the 'FPL – Flight Plan Catalog' Page, and are available for activation (becomes the active flight plan).

The following procedure is intended to provide an overview of basic flight plan creation. It will create a flight plan from the origin runway to the destination runway, and includes enroute waypoint selection. The following procedure does not include airways or terminal procedures. For instructions on how to add airways to a flight plan, see the Flight Plan Waypoint and Airway Modifications discussion later in this Flight Planning Section. For information on departures, arrivals, approaches, and missed approaches see the Procedures Section.

Creating an active flight plan:

- 1) Press the **FPL** Key. Press the small **FMS** Knob to activate the cursor (not required on PFD).
- 2) If the system correctly auto-designated (populated) the Origin, proceed to Step 3.
Or:
Select the origin airport and runway as follows:
 - a) Highlight the field below the Origin header to enter the origin airport identifier using the **FMS** Knob.
 - b) Use the **FMS** Knob or the waypoint submenu to enter the identifier, facility, or city name of the origin waypoint.
 - c) Press the **ENT** Key. The 'Set Runway' Window is displayed with the 'Runway' Field highlighted.
 - d) Turn the small **FMS** Knob to select the runway, and press the **ENT** Key.
 - e) Press the **ENT** Key again to add the origin airport/runway to the flight plan.
- 3) Select the destination airport and runway by highlighting the field below the Destination header and completing steps 2b - 2e.
- 4) Select the enroute waypoints.
 - a) Highlight the location to insert the waypoint using the **FMS** Knob (If the enroute header is selected, the new waypoint is placed following the header. If an enroute waypoint or the dashes are selected, the new waypoint will be placed ahead of the selected item).
 - b) Use the **FMS** Knob or the waypoint submenu to enter the identifier, facility, or city name of the waypoint. The active flight plan is modified as each waypoint is entered.
- 5) Repeat step number 4 to enter each additional enroute waypoint.
- 6) When all waypoints have been entered, press the **FMS** Knob to remove to deactivate the cursor.

Creating a stored flight plan:

- 1) Press the **FPL** Key for the MFD.
- 2) Turn the small **FMS** Knob clockwise to display the 'FPL – Flight Plan Catalog' Page.
- 3) Press the **New** Softkey; or press the **MENU** Key, highlight 'Create New Flight Plan', and press the **ENT** Key to display a blank flight plan for the first empty storage location.

- 4) Select the origin airport and runway.
 - a) Highlight the field below the Origin header to enter the origin airport identifier using the **FMS** Knob.
 - b) Use the **FMS** Knob or the waypoint submenu to enter the identifier, facility, or city name of the origin waypoint.
 - c) Press the **ENT** Key. The 'Set Runway' Window is displayed with the 'Runway' Field highlighted.
 - d) Turn the small **FMS** Knob to select the runway.
 - e) Press the **ENT** Key to add the origin airport/runway to the flight plan.
- 5) Select the destination airport and runway by highlighting the field below the Destination header and completing steps 4b - 4e.
- 6) Select the enroute waypoints.
 - a) Highlight the location to insert the waypoint using the **FMS** Knob (If the enroute header is selected, the new waypoint is placed following the header. If an enroute waypoint or the dashes are selected, the new waypoint will be placed ahead of the selected item.)
 - b) Use the **FMS** Knob or the waypoint submenu to enter the identifier, facility, or city name of the waypoint.
 - c) Press the **ENT** Key. The stored flight plan is modified as each waypoint is entered.
- 7) Repeat step number 6 to enter each additional enroute waypoint.
- 8) When all waypoints have been entered, press the **FMS** Knob to deactivate the cursor.

FLIGHT PLAN WAYPOINT AND AIRWAY MODIFICATIONS

Active and stored flight plans can be edited at any time. Waypoints and airways can be added, modified, or removed from any flight plan. Edits made to an active flight plan affect navigation as soon as they are entered. Modifications to flight planned departures, arrivals, approaches, and missed approaches are discussed later in the Procedures portion of Flight Management.

FLIGHT PLAN WAYPOINTS

Waypoints can be added to the active flight plan or any stored flight plan. Choose the flight plan, select the desired point of insertion, enter the waypoint, and it is added in front of the selected waypoint. Flight plans are limited to 100 waypoints (including waypoints within airways and procedures). If the number of waypoints in the flight plan exceeds 100, the message "Flight plan is full. Remove unnecessary waypoints." appears and the new waypoint(s) are not added to the flight plan.

ADDING WAYPOINTS



NOTE: Manually adding waypoints to a flight plan after a MANSEQ leg creates a lateral gap in the flight plan. Time, fuel, and distance values for legs beyond the gap do not include the distance across the gap.



NOTE: If the identifier entered in the 'Waypoint Information' Window has duplicates, a 'Duplicate Waypoint' Window is displayed. Use the **FMS** Knob to select the correct waypoint.



NOTE: If the flight plan is successfully edited in the 'Flight Plan' Window from PFD while the MFD 'FPL – Active Flight Plan' Page is in the process of being edited, the 'Flight Plan Modified By Other User' Window will appear on the MFD. Press the **ENT** key to return to the 'FPL – Active Flight Plan' Page with the accepted changes.

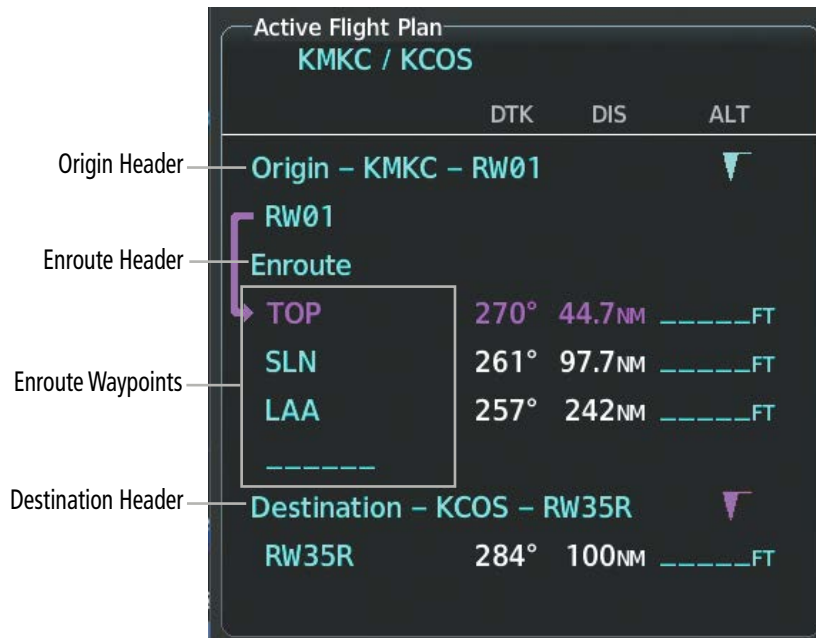


Figure 5-44 Active Flight Plan Waypoints

Adding a waypoint to the active flight plan:

- 1) Press the **FPL** Key.
- 2) Press the **FMS** Knob to activate the cursor (not required on the PFD).
- 3) Select the point in the flight plan before which to add the new waypoint. The new waypoint is placed directly in front of the highlighted waypoint.
- 4) Turn the small **FMS** Knob to display the 'Waypoint Information' Window. (Turning it clockwise displays a blank 'Waypoint Information' Window, turning it counter-clockwise displays the 'Waypoint Information' Window with a waypoint selection submenu allowing selection of active flight plan, nearest, recent, user, or airway waypoints).
- 5) Enter the identifier, facility, or city name of the waypoint or select a waypoint from the submenu of waypoints and press the **ENT** Key. The active flight plan is modified as each waypoint is entered.

Creating and adding user waypoints to the active flight plan using the map pointer:

- 1) Press the **FPL** Key
- 2) Press the **FMS** Knob for the MFD to activate the cursor.
- 3) Select the point in the flight plan to add the new waypoint.
- 4) Push the **Joystick** on the MFD to activate the panning function on the 'FPL – Active Flight Plan' Page and pan to the map location of the desired user waypoint.
- 5) Press the **LD WPT** Softkey; or press the **MENU** Key, select 'Load Waypoint', and press the **ENT** Key. A user waypoint is created with a name USRxxx (using the next available in sequence) and is added to the active flight plan.

Adding a waypoint to an existing stored flight plan:

- 1) On the 'FPL – Flight Plan Catalog' Page, press the **FMS** Knob to activate the cursor.
- 2) Highlight the desired flight plan.
- 3) Press the **EDIT** Softkey; or press the **ENT** Key, turn the large **FMS** Knob clockwise to select "EDIT" and press the **ENT** Key. The 'FPL – Stored Flight Plan' Page is displayed.
- 4) Select the point in the flight plan to add the new waypoint. The new waypoint is placed directly in front of the highlighted waypoint.
- 5) Turn the small **FMS** Knob to display the 'Waypoint Information' Window. (Turning it clockwise displays a blank 'Waypoint Information' Window, turning it counter-clockwise displays the 'Waypoint Information' Window with a waypoint selection submenu allowing selection of active flight plan, nearest, recent, user, or airway waypoints).
- 6) Enter the identifier, facility, or city name of the waypoint or select a waypoint from the submenu of waypoints and press the **ENT** Key. The new waypoint now exists in the flight plan.

REMOVING WAYPOINTS

Individual waypoints can be removed from a flight plan. Some waypoints in the final approach segment (such as the FAF or MAP) can not be removed individually. Attempting to remove a waypoint that is not allowed results in a window displaying 'Invalid flight plan modification'.



NOTE: *If removal of a flight plan item (waypoint, procedure, etc.) results in deletion of the end waypoint of the active leg, an off-route direct-to to the deleted waypoint is created and activated.*

Removing an individual waypoint from the active flight plan:

- 1) Press the **FPL** Key to display the 'FPL – Active Flight Plan' Page (MFD) or the 'Flight Plan' Window (PFD).
- 2) Press the **FMS** Knob to activate the cursor (not required on the PFD) and turn the large **FMS** Knob to highlight the waypoint to be removed.
- 3) Press the **CLR** Key. The 'Remove XXXXX?' window is displayed.
- 4) With 'OK' highlighted, press the **ENT** Key. To cancel the request, press the **CLR** Key, or highlight 'Cancel' and press the **ENT** Key.
- 5) Press the **FMS** Knob to remove the flashing cursor.

Removing an individual waypoint from a stored flight plan:

- 1) Press the **FPL** Key to display the 'FPL – Active Flight Plan' Page.
- 2) Turn the small **FMS** Knob clockwise one click to display the 'FPL – Flight Plan Catalog' Page.
- 3) Press the **FMS** Knob to activate the cursor and turn the **FMS** Knob to highlight the flight plan to be edited.
- 4) Press the **Edit** Softkey; or press the **MENU** Key, select 'Edit Flight Plan' and press the **ENT** Key. The 'FPL – Stored Flight Plan' Page is displayed.
- 5) Turn the large **FMS** Knob to highlight the waypoint to be removed.
- 6) Press the **CLR** Key. The 'Remove XXXXX?' window is displayed.
- 7) With 'OK' highlighted, press the **ENT** Key. To cancel the request, press the **CLR** Key, or highlight 'Cancel' and press the **ENT** Key.
- 8) Press the **FMS** Knob to remove the flashing cursor.

FLY-OVER WAYPOINT DESIGNATION

Waypoints entered in the enroute segment of the flight plan may be treated as fly-by waypoints, unless otherwise designated. A fly-by waypoint is a waypoint that marks the intersection of two straight paths, with the transition from one path to another being made by the aircraft using a precisely calculated turn that “flies by” but does not vertically cross the waypoint. A fly-over waypoint is a waypoint that must be crossed vertically by the aircraft.



Figure 5-45 TOP Fly-By Waypoint



Figure 5-46 TOP Fly-Over Waypoint

Designating a fly-over waypoint:

- 1) For the active flight plan, press the **FPL** Key and press the FMS Knob to activate the cursor (not required on the PFD).
Or:
For a stored flight plan, highlight the desired flight plan on the 'FPL – Flight Plan Catalog' Page' and press the **Edit** Softkey.
- 2) Highlight the desired waypoint.
- 3) Press the **MENU** Key, highlight 'Set Fly-Over Waypoint', and press the **ENT** Key. The 'Set <waypoint> to be a fly-over waypoint?' Window is displayed.
- 4) With 'OK' highlighted, press the **ENT** Key. To cancel the request, press the **CLR** Key, or highlight 'Cancel' and press the **ENT** Key.
- 5) To change the waypoint back to a fly-by waypoint, highlight the desired waypoint. Press the **MENU** Key, highlight 'Set Fly-By Waypoint', and press the **ENT** Key. The 'Set <waypoint> to be a fly-by waypoint?' Window is displayed. With 'OK' highlighted, press the **ENT** Key.

FLIGHT PLAN AIRWAYS

Within flight plans, airways can be added, removed and collapsed/expanded.

ADDING AIRWAYS

Airways can be added to any flight plan. An airway can only be added if there is an existing entry waypoint in the flight plan that is part of the desired airway and is not part of an arrival or approach procedure. The system anticipates the desired airway based on the selected waypoint and the flight plan.



Figure 5-47 Selecting Airway



Figure 5-48 Selecting Exit Point

Adding an airway to the active flight plan:

- 1) Press the **FPL** Key.
- 2) Press the **FMS** Knob to activate the cursor (not required on the PFD).
- 3) Turn the large **FMS** Knob to move the cursor below the airway entry waypoint for the insertion point. If there is no valid airway entry waypoint in the flight plan, one must be entered first.
- 4) Turn the small **FMS** Knob for the MFD one click clockwise and press the **LD AIRWY** Softkey, or press the **MENU** Key for the and select "Load Airway" (PFD or MFD). The **LD AIRWY** Softkey or the "Load Airway" menu item is available only when a valid airway entry waypoint has already been entered in the flight plan.
- 5) Turn the **FMS** Knob to highlight the desired airway from the list, and press the **ENT** Key. Low altitude airways are shown first in the list, followed by "all" altitude airways, and then high altitude airways.
- 6) Turn the **FMS** Knob to highlight the desired airway exit point from the list, and press the **ENT** Key. 'Load?' is highlighted.
- 7) Press the **ENT** Key. The system returns to editing the flight plan with the new airway inserted.

Adding an airway to a stored flight plan:

- 1) On the 'FPL – Flight Plan Catalog' Page, press the **FMS** Knob to activate the cursor.
- 2) Highlight the desired flight plan.
- 3) Press the **EDIT** Softkey; or press the **ENT** Key, turn the large **FMS** Knob clockwise to highlight "EDIT" and press the **ENT** Key. The 'FPL – Stored Flight Plan' Page is displayed.
- 4) Turn the large **FMS** Knob to move the cursor below the airway entry waypoint for the insertion point. If there is no valid airway entry waypoint in the flight plan, one must be entered first.
- 5) Turn the small **FMS** Knob one click clockwise and press the **LD AIRWY** Softkey (MFD only), or press the **MENU** Key and select "Load Airway". The **LD AIRWY** Softkey or the "Load Airway" menu item is available only when a valid airway entry waypoint has already been entered in the flight plan.

- 6) Turn the **FMS** Knob to highlight the desired airway from the list, and press the **ENT** Key. Low altitude airways are shown first in the list, followed by "all" altitude airways, and then high altitude airways.
- 7) Turn the **FMS** Knob to highlight the desired airway exit point from the list, and press the **ENT** Key. 'Load?' is highlighted.
- 8) Press the **ENT** Key. The system returns to editing the flight plan with the new airway inserted

Some airways have directional restrictions on all or part of the route. Airway "A2" in Europe has a directional restriction over the whole route and it can be flown only one direction.

For example, airway "UR975" in North Africa has more complicated directional restrictions within the list of airway waypoints. That is, each waypoint may have its own conditional route in relation to another waypoint.

In the US, airways that are "one-way" for specified hours of operation are not uncommon. These airways are always bidirectional in the system database.

The system only allows correct airway sequences to be inserted. If the pilot subsequently inverts the flight plan, the system inverts the airway waypoint sequence and removes the airway header.

REMOVING AIRWAYS

Removing an entire airway from the active flight plan:

- 1) Press the **FPL** Key to display the 'FPL – Active Flight Plan' Page (MFD) or the 'Flight Plan' Window (PFD).
- 2) Press the **FMS** Knob to activate the cursor (not required on the PFD) and turn the large **FMS** Knob to highlight the header of the airway to be removed.
- 3) Press the **CLR** Key. The 'Remove <airway name> from flight plan?' window is displayed.
- 4) With 'OK' highlighted, press the **ENT** Key. To cancel the request, press the **CLR** Key, or highlight 'Cancel' and press the **ENT** Key.
- 5) Press the **FMS** Knob to remove the flashing cursor.

Removing an entire airway from a stored flight plan:

- 1) Press the **FPL** Key to display the 'FPL – Active Flight Plan' Page.
- 2) Turn the small **FMS** Knob clockwise one click to display the 'FPL – Flight Plan Catalog' Page.
- 3) Press the **FMS** Knob to activate the cursor and turn the **FMS** Knob to highlight the flight plan to be edited.
- 4) Press the **Edit** Softkey; or press the **MENU** Key, select 'Edit Flight Plan' and press the **ENT** Key. The 'FPL – Stored Flight Plan' Page is displayed.
- 5) Turn the large **FMS** Knob to highlight the header of the airway to be removed.
- 6) Press the **CLR** Key. The 'Remove <airway name> from flight plan?' window is displayed.
- 7) With 'OK' highlighted, press the **ENT** Key. To cancel the request, press the **CLR** Key, or highlight 'Cancel' and press the **ENT** Key.
- 8) Press the **FMS** Knob to remove the flashing cursor.

COLLAPSING AIRWAYS

The system allows airways on the active flight plan to be collapsed or expanded. When airways have been collapsed, it is indicated on the airway heading.

When airways are collapsed, leg-to-leg computed values such as DIS or ETE shown for the exit waypoint reflect the total of all the legs on the airway that have been hidden in the collapsed display. The DTK value is inhibited because it is not usable in this context.

The active flight plan will always keep the following three waypoints visible: “From” waypoint, “To” waypoint, and “Next” waypoint. To prevent one or more of these waypoints from being hidden in a collapsed airway segment, the airway segment that contains either the “To” or the “Next” waypoint is automatically expanded. When an airway is loaded, airways are automatically expanded to facilitate flight plan review.

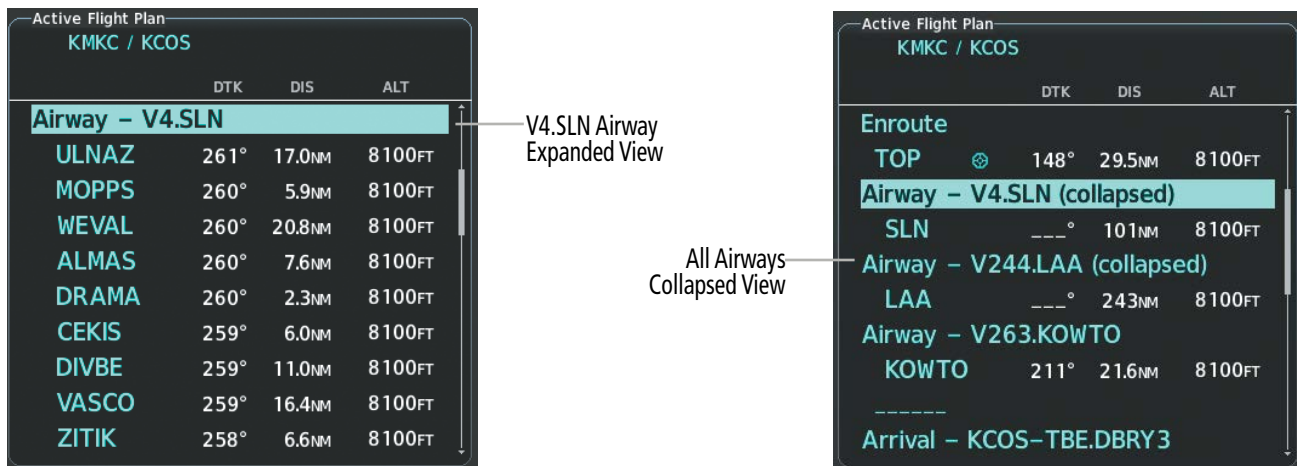


Figure 5-49 Expanded/Collapsed Airways

Collapsing/expanding the airways in the active flight plan:

- 1) Press the **FPL** Key to display the 'FPL – Active Flight Plan' Page (MFD) or the 'Flight Plan' Window (PFD).
- 2) Press the **MENU** Key, highlight 'Collapse Airways' or 'Expand Airways', and press the **ENT** Key. The airways are collapsed/expanded.

FLIGHT PLAN OPERATIONS

This section will discuss activating a flight plan leg and conducting enroute operations such as creating an along track offset, parallel track, closest point from a reference point and user defined holding. For information on departures, arrivals, and approaches refer to the Procedures portion later in the Flight Management Section.

ACTIVATING A FLIGHT PLAN LEG

The flight plan leg which is currently being used for navigation guidance is referred to as the 'active leg'. The system automatically sequences from one active leg to the next as defined by the active flight plan.

Activating a flight plan leg:

- 1) Press the **FPL** Key to display the 'FPL – Active Flight Plan' Page (MFD) or the 'Flight Plan' Window (PFD).
- 2) Press the **FMS** Knob to activate the cursor (not required on the PFD) and turn the large **FMS** Knob to highlight the end waypoint for the desired leg.
- 3) Press the **ACT Leg** Softkey (MFD only); or press the **MENU** Key, highlight 'Activate Leg', and press the **ENT** Key. A confirmation window is displayed with 'Activate' highlighted.
- 4) Press the **ENT** Key to activate the flight plan leg. To cancel, press the **CLR** Key, or highlight 'Cancel' and press the **ENT** Key.
- 5) Press the **FMS** Knob to deactivate the flashing cursor.

ALONG TRACK OFFSETS

A waypoint having an "along track offset" distance from an existing waypoint can be entered into a flight plan. Along track offset waypoints lie along the path of the existing flight plan, and can be used to make the system reach a specified altitude before or after reaching the specified flight plan waypoint. Offset distances can be entered from 1 to 999 nm in increments of 1 nm. Entering a negative offset distance results in an along track offset waypoint inserted before the selected waypoint, whereas entering a positive offset distance results in an along track offset waypoint inserted after the selected waypoint. Multiple offset waypoints are allowed.

A waypoint must be adjacent to its parent waypoint in the flight plan, so the system limits the along-track distance to less than the length of the leg before or after the selected waypoint. If the selected waypoint is the active waypoint, the distance is limited to less than the distance to go to the active waypoint. Assigning an along track offset to a leg with indeterminate length is not permitted. An along track offset is not allowed at or after the final approach fix of an approach.

An along track offset distance cannot be modified once entered. If the along track offset distance must be changed, the existing along track offset waypoint must be removed and a new one created with the new offset distance.



Figure 5-50 Along Track Offset

Entering an along track offset distance:

- 1) Press the **FPL** Key to display the 'FPL – Active Flight Plan' Page (MFD) or the 'Flight Plan' Window (PFD).
- 2) Press the **FMS** Knob to activate the cursor (not required on the PFD) and turn the large **FMS** Knob to highlight the waypoint for the along track offset.
- 3) Press the **ATK OFS** Softkey (MFD only); or press the **MENU** Key, highlight 'Create ATK Offset Waypoint', and press the **ENT** Key.
- 4) Enter a positive or negative offset distance in the range of +/- 1 to 999 nm (limited by leg distances).
- 5) Press the **ENT** Key to create the offset waypoint.
- 6) Press the **FMS** Knob to deactivate the flashing cursor.

PARALLEL TRACK

The Parallel Track feature allows creation of a parallel course offset of 1 to 50 nm left or right of the current flight plan. When Parallel Track is activated, the course line drawn on the map pages shows the parallel course, and waypoint names have a lower case "p" placed after the identifier. Activation of parallel track will apply from the current position along the flight plan until a leg that does not meet the criteria for parallel track. Guidance will be computed to return to the original track at the beginning of that leg.

If the parallel track proposed by the offset direction and distance is not allowed by the system, the activation prompt is displayed, but disabled.

The following will inhibit activation of a parallel track:

- » Initiating a direct-to, to the selected waypoint.
- » If an approach leg is active, the status indicates the system is unable to activate the parallel track with the message 'Parallel Track Unavailable Approach Leg Active'.

- » If the offset direction and distance results in an unreasonable route geometry (e.g., there is a sharp turn of more than 120 degrees), the status indicates the system is unable to activate the parallel track because of invalid geometry ('Parallel Track Unavailable Invalid Route Geometry').
- » If the active leg is not a track between two fixes (TF) or a course to a fix (DF) leg, the status indicates the system is unable to activate the parallel track because parallel track is not available for the active leg type ('Parallel Track Unavailable Not Allowed for Active Leg').

If there are no legs remaining in the flight plan after the given leg, or OBS mode is active. The following will cancel the parallel track:

- » Initiating a direct-to, to a waypoint.
- » Initiating a hold at the present position.
- » If a course change occurs greater than 120° or the parallel tracks overlap as a result of the course change.
- » No legs are remaining in the flight plan after the given leg, or OBS mode is active. Initiating a hold at a waypoint will result in the aircraft flying the parallel track until a turn is required to fly to the hold waypoint. If the hold is removed prior to reaching the hold waypoint, the parallel track will be resumed. Once the holding pattern is active, the parallel track will not be resumed upon exiting the hold.



NOTE: Vertical navigation is unavailable while the Parallel Track feature is active.



Figure 5-51 Parallel Track Active

Activating parallel track:

- 1) Press the **FPL** Key to display the 'FPL – Active Flight Plan' Page (MFD) or the 'Flight Plan' Window (PFD).
- 2) Press the **MENU** Key, highlight 'Parallel Track', and press the **ENT** Key. The 'Parallel Track' Window is displayed with the 'Direction' Field highlighted.
- 3) Turn the small **FMS** Knob to select 'LEFT' or 'RIGHT' and press the **ENT** Key. The 'Distance' Field is highlighted.
- 4) Turn the small **FMS** Knob to enter a distance from 1-99 nm and press the **ENT** Key. 'Activate Parallel Track' is highlighted.
- 5) Press the **ENT** Key to activate parallel track. Press the **FMS** Knob or the **CLR** Key to cancel the parallel track activation.

Cancelling parallel track:

- 1) Press the **FPL** Key to display the 'FPL – Active Flight Plan' Page (MFD) or the 'Flight Plan' Window (PFD).
- 2) Press the **MENU** Key, highlight 'Parallel Track', and press the **ENT** Key. The 'Parallel Track' Window is displayed with 'Cancel Parallel Track?' highlighted.
- 3) Press the **ENT** Key.

CLOSEST POINT OF FPL

'Closest Point of FPL' calculates the bearing and closest distance at which a flight plan passes a reference waypoint, and creates a new user waypoint along the flight plan at the location closest to a chosen reference waypoint.

Determining the closest point along the active flight plan to a selected waypoint:

- 1) Press the **FPL** Key to display the 'FPL – Active Flight Plan' Page (MFD) or the Active 'Flight Plan' Window (PFD).
- 2) Press the **MENU** Key, highlight 'Closest Point Of FPL', and press the **ENT** Key. A window appears with the reference waypoint field highlighted.
- 3) Enter the identifier of the reference waypoint and press the **ENT** Key. The system displays the bearing (BRG) and distance (DIS) to the closest point along the flight plan to the selected reference waypoint and creates a user waypoint at this location. The name for the new user waypoint is derived from the identifier of the reference waypoint.

USER-DEFINED HOLDING PATTERNS

A holding pattern can be defined at any active flight plan waypoint, at the aircraft present position, or at a direct-to waypoint.

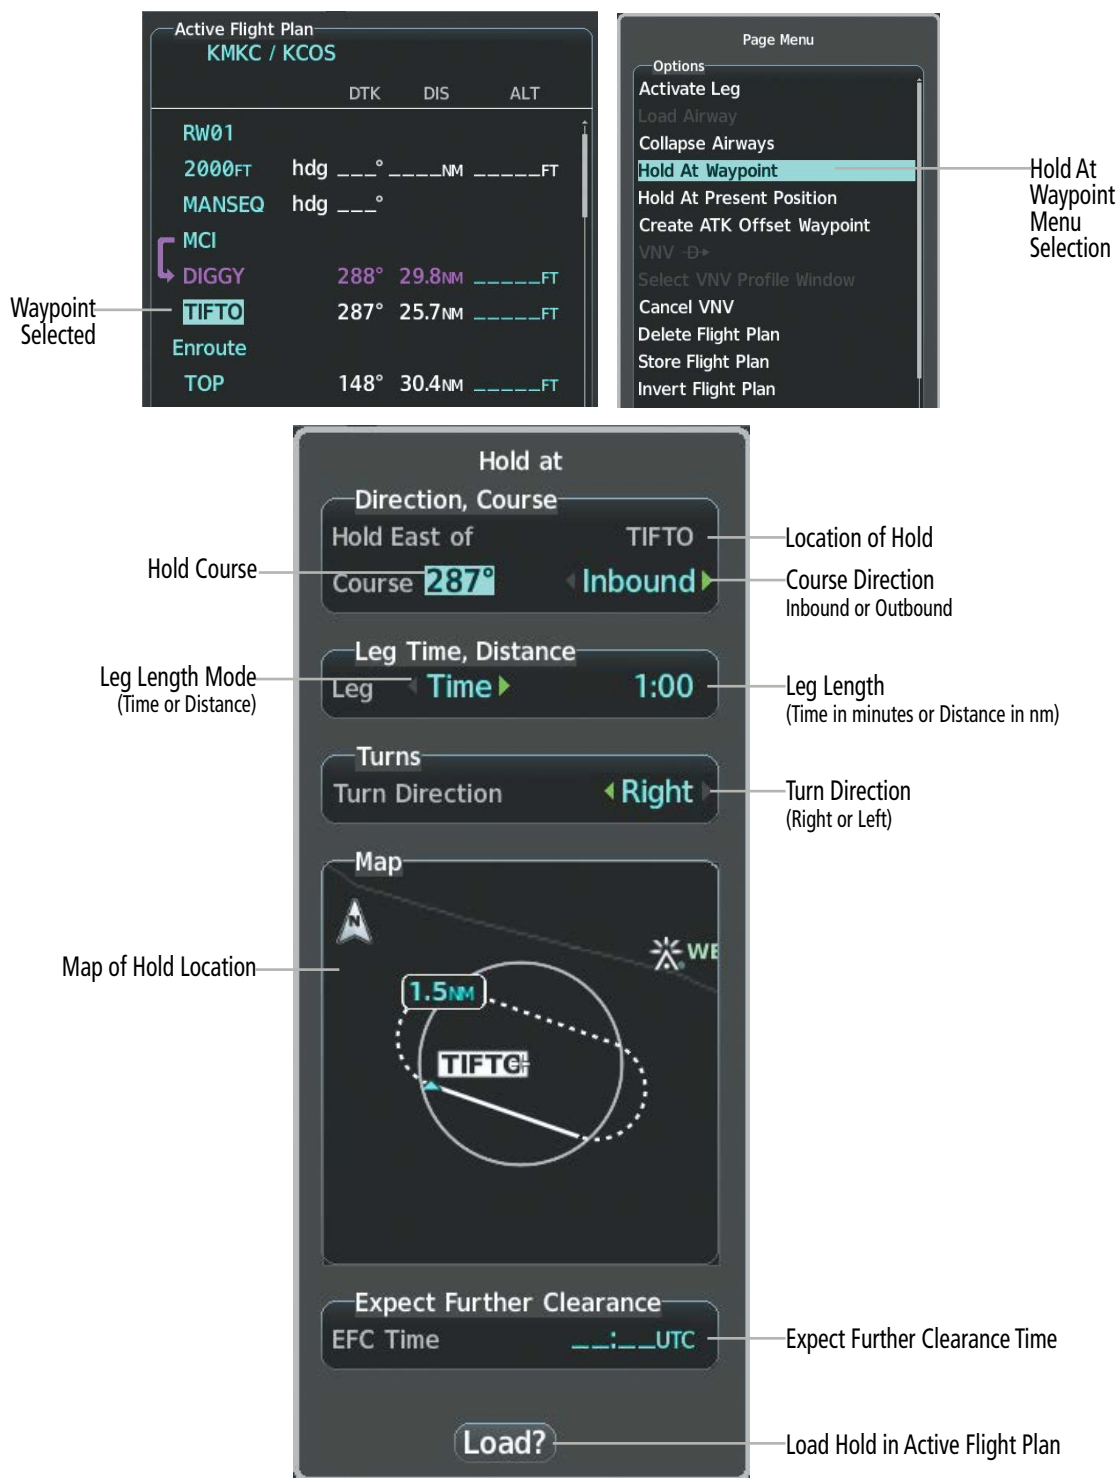


Figure 5-52 Creating a User Defined Holding Pattern at an Active Flight Plan Waypoint

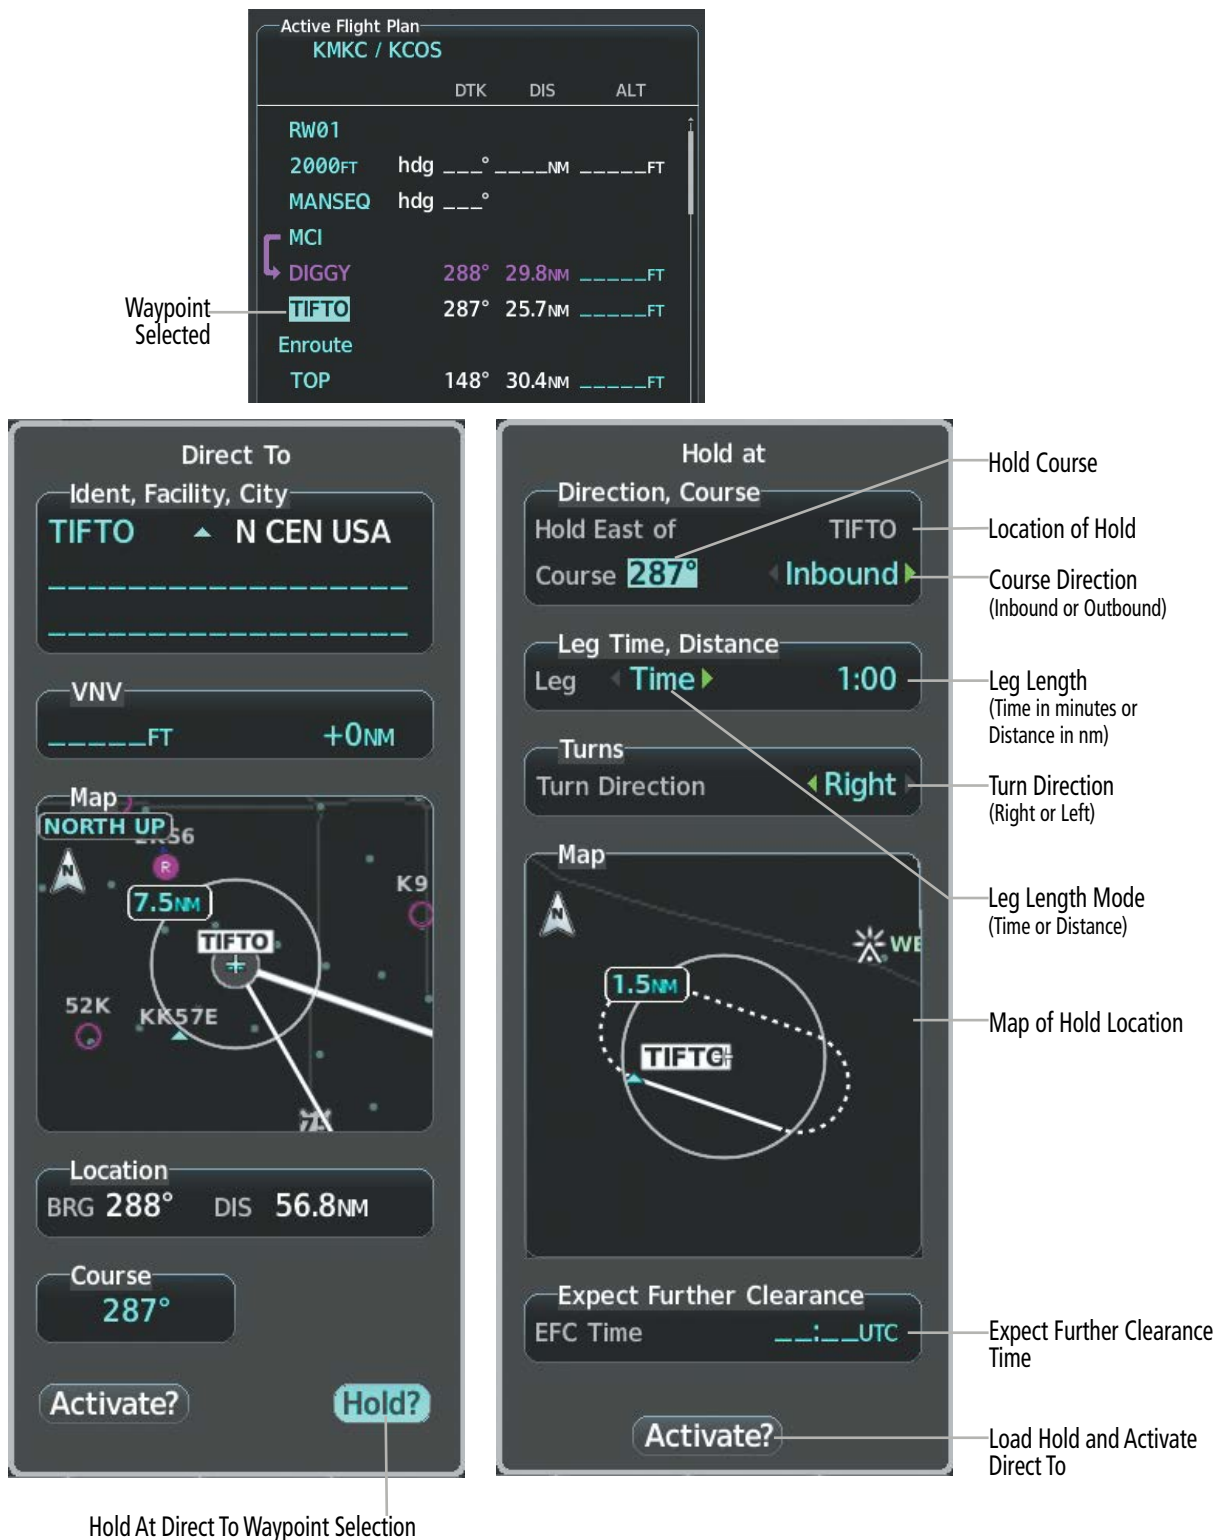


Figure 5-53 Creating a User Defined Holding Pattern at a Direct To Waypoint

Creating a user-defined hold at an active flight plan waypoint:

- 1) Press the **FPL** Key to display the 'FPL – Active Flight Plan' Page (MFD) or the 'Flight Plan' Window (PFD).
- 2) Press the **FMS** Knob to activate the cursor (not required on the PFD) and turn the large **FMS** Knob to highlight the waypoint for the hold.
- 3) Press the **MENU** Key, highlight 'Hold At Waypoint', and press the **ENT** Key. The 'Hold at' Window appears with the course field highlighted.
- 4) Use the **FMS** Knobs to edit the course, and press the **ENT** Key.
- 5) Use the small **FMS** Knob to select 'Inbound' or 'Outbound' course direction, and press the **ENT** Key.
- 6) Use the small **FMS** Knob to select 'Time' or 'Distance' length mode, and press the **ENT** Key.
- 7) Use the **FMS** Knobs to edit the length, and press the **ENT** Key.
- 8) Use the small **FMS** Knob to select 'Right' or 'Left' turn direction, and press the **ENT** Key.
- 9) Use the **FMS** Knobs to edit the Expect Further Clearance Time (EFC Time), and press the **ENT** Key.
- 10) Press the **ENT** Key while 'Load?' is highlighted to insert the hold into the flight plan.

Creating a user-defined hold at the aircraft present position:

- 1) Press the **FPL** Key to display the 'FPL – Active Flight Plan' Page (MFD) or the 'Flight Plan' Window (PFD).
- 2) Press the **MENU** Key, highlight 'Hold At Present Position', and press the **ENT** Key. The 'Hold at' Window appears with the course field highlighted.
- 3) If desired, use the **FMS** Knobs to edit the course, and press the **ENT** Key.
- 4) Use the small **FMS** Knob to select 'Inbound' or 'Outbound' course direction, and press the **ENT** Key.
- 5) Use the small **FMS** Knob to select 'Time' or 'Distance' length mode, and press the **ENT** Key.
- 6) Use the **FMS** Knobs to edit the length, and press the **ENT** Key.
- 7) Use the small **FMS** Knob to select 'Right' or 'Left' turn direction, and press the **ENT** Key.
- 8) Use the **FMS** Knobs to edit the Expect Further Clearance Time (EFC Time), and press the **ENT** Key.
- 9) Press the **ENT** Key while 'Activate?' is highlighted to create an Offroute Direct-to hold waypoint at the aircraft present position and activate the hold.

Creating a user-defined hold at a direct-to waypoint:

- 1) Press a **Direct-to** Key and set up the direct-to waypoint as desired, but select 'Hold?' instead of 'Activate?' when finished.
- 2) Use the **FMS** Knobs to edit the course, and press the **ENT** Key.
- 3) Use the small **FMS** Knob to select 'Inbound' or 'Outbound' course direction, and press the **ENT** Key.
- 4) Use the small **FMS** Knob to select 'Time' or 'Distance' length mode, and press the **ENT** Key.
- 5) Use the **FMS** Knobs to edit the length, and press the **ENT** Key.
- 6) Use the small **FMS** Knob to select 'Right' or 'Left' turn direction, and press the **ENT** Key.
- 7) Use the **FMS** Knobs to edit the Expect Further Clearance Time (EFC Time), and press the **ENT** Key.
- 8) Press the **ENT** Key while 'Activate?' is highlighted to activate the direct-to with the user-defined hold defined at the direct-to waypoint. (If the direct-to waypoint is part of the active flight plan, 'HOLD' is inserted into the active flight plan. If the direct-to waypoint is not part of the active flight plan, an off-route direct-to hold is created.)

Exiting a user-defined hold inserted into the active flight plan:

Press the **SUSP** Softkey. The system will provide guidance to follow the holding pattern to the inbound course and resume automatic waypoint sequencing.

Removing a user-defined hold inserted into the active flight plan:

- 1) Press the **FPL** Key to display the 'FPL – Active Flight Plan' Page (MFD) or the 'Flight Plan' Window (PFD).
- 2) Press the **FMS** Knob to activate the cursor (not required on the PFD) and turn the large **FMS** Knob to highlight 'HOLD' in the flight plan.
- 3) Press the **CLR** Key. A 'Remove Holding Pattern?' confirmation window is displayed.
- 4) Select 'OK' and press the **ENT** Key. The holding pattern is removed from the active flight plan. Select 'Cancel' and press the **ENT** Key to cancel the removal of the holding pattern.

Removing a user-defined hold at an off-route direct-to:

- 1) Press a **Direct To** Key to display the 'Direct To' Window.
- 2) Press the **MENU** Key to display the 'Page Menu' Window with the cursor on the 'Cancel Direct-To NAV' selection.
- 3) Press the **ENT** Key. The holding pattern is removed.

MANAGING FLIGHT PLANS

The pilot can manage flight plans by importing/exporting via SD Card or mobile device, and by storing, copying, inverting, and deleting. Also, the comment field (name) of each flight plan can be changed to something that is useful for identification and sorting.

IMPORTING AND EXPORTING FLIGHT PLANS

Flight plans can be transferred to or from a mobile device via the Wireless Transceiver. Transfer of a flight plan to a mobile device is controlled by the mobile device. When a mobile device is attempting to transfer a flight plan to the system, the pending flight plan may be ignored, previewed, stored, or activated by the pilot.



Figure 5-54 Preview Flight Plan



Figure 5-55 Pending Flight Plan Transfer

Ignoring a pending flight plan transferred from a wireless connection:

- 1) When a flight plan transfer has been initiated from a mobile device, a 'PENDING FLIGHT PLAN' pop-up alert appears in the lower right corner of the MFD, and an Connex announcement appears to the right of the MFD page title.
- 2) Press the **CLR** Key to remove the pop-up alert and ignore the pending flight plan. The pending flight plan will still be available on the 'FPL – Flight Plan Catalog' Page.

Or:

Press the **Ignore** Softkey to remove the pop-up alert and ignore the pending flight plan. The pending flight plan will still be available on the 'FPL – Flight Plan Catalog' Page.

Previewing a pending flight plan transferred from a wireless connection:

- 1) When a flight plan transfer has been initiated from a mobile device, a 'PENDING FLIGHT PLAN' pop-up alert appears in the lower right corner of the MFD, and an Connex announcement appears to the right of the MFD page title.
- 2) Press the **ENT** Key to display the 'FPL – Preview Flight Plan' Page on the MFD.

Or:

Press the **Preview** Softkey to display the 'FPL – Preview Flight Plan' Page on the MFD.

Or:

- a) Press the **MENU** Key,
- b) Turn the **FMS** Knob to highlight 'Preview Flight Plan'.
- c) Press the **ENT** Key to display the 'FPL – Preview Flight Plan' Page on the MFD.

Storing a pending flight plan transferred from a wireless connection:

- 1) Press the **FPL** Key.
- 2) Turn the small **FMS** Knob to display the 'FPL – Flight Plan Catalog' Page.
- 3) Press the **FMS** Knob to activate the cursor, and
- 4) Turn the **FMS** Knob to highlight the pending flight plan.
- 5) Press the **ENT** Key to display the 'FPL – Preview Flight Plan' Page on the MFD.
- 6) Press the **Store** Softkey to store the flight plan. The pending flight plan is stored and the pending announcement is removed.

Or:

- a) Press the **FMS** Knob to activate the cursor.
- b) Turn the **FMS** Knob to highlight 'Store?'
- c) Press the **ENT** Key to store the flight plan. The pending flight plan is stored and the pending announcement is removed.

Or:

- a) Press the **MENU** Key,
- b) Turn the **FMS** Knob to highlight 'Store Flight Plan'.
- c) Press the **ENT** Key to store the flight plan. The pending flight plan is stored and the pending announcement is removed.

Activating a pending flight plan transferred from a wireless connection:

- 1) Press the **FPL** Key and turn the small **FMS** Knob to display the 'FPL – Flight Plan Catalog' Page.
- 2) Press the **FMS** Knob to activate the cursor, and turn the **FMS** Knob to highlight the pending flight plan.
- 3) Press the **ENT** Key to display the 'FPL – Preview Flight Plan' Page on the MFD.
- 4) Press the **Activate** Softkey. The 'Activate Flight Plan?' window is displayed.

Or:

- a) Press the **FMS** Knob to activate the cursor.
- b) Turn the **FMS** Knob to highlight 'Activate?'.
- c) Press the **ENT** Key. The 'Activate Flight Plan?' window is displayed.

Or:

- a) Press the **MENU** Key.
- b) Turn the **FMS** Knob to highlight 'Activate Flight Plan'.
- c) Press the **ENT** Key. The 'Activate Flight Plan?' window is displayed.
- 5) With 'OK' highlighted, press the **ENT** Key to activate the pending flight plan. The pending flight plan becomes the active flight plan and is removed from the 'FPL – Flight Plan Catalog' Page. To cancel the request, press the **CLR** Key, or highlight 'Cancel' and press the **ENT** Key.

Deleting a pending flight plan:

- 1) Press the **FPL** Key.
- 2) Turn the small **FMS** Knob to display the 'FPL – Flight Plan Catalog' Page.
- 3) Press the **FMS** Knob to activate the cursor.
- 4) Turn the **FMS** Knob to highlight the desired pending flight plan.
- 5) Press the **Delete** Softkey. The 'Delete Flight Plan XX?' window is displayed.

Or:

Press the **CLR** Key. The 'Delete Flight Plan XX?' window is displayed.

Or:

- a) Press the **MENU** Key.
- b) Turn the **FMS** Knob to highlight 'Delete Flight Plan'.
- c) Press the **ENT** Key. The 'Delete Flight Plan XX?' window is displayed.
- 6) With 'OK' highlighted, press the **ENT** Key to delete the pending flight plan. The pending flight plan is removed from the 'FPL – Flight Plan Catalog' Page. To cancel the request, press the **CLR** Key, or highlight 'Cancel' and press the **ENT** Key.

Deleting all pending flight plans:

- 1) Press the **FPL** Key.
- 2) Turn the small **FMS** Knob to display the 'FPL – Flight Plan Catalog' Page.
- 3) Press the **MENU** Key.
- 4) Turn the **FMS** Knob to highlight 'Delete All Pending'.
- 5) Press the **ENT** Key. A 'Delete all pending flight plans?' confirmation window is displayed.
- 6) With 'OK' highlighted, press the **ENT** Key to delete all pending flight plans. To cancel the request, press the **CLR** Key, or highlight 'Cancel' and press the **ENT** Key.

Alternatively, flight plans may be imported from an SD Card or exported to an SD Card from the 'FPL – Stored Flight Plan' Page.

Under certain conditions, some messages may appear when a flight plan is imported or exported.

Flight Plan Import/Export Results	Description
'Flight plan successfully imported.'	A flight plan file stored on the SD card was successfully imported as a stored flight plan.
'File contained user waypoints only. User waypoints imported successfully. No stored flight plan data was modified.'	The file stored on the SD card did not contain a flight plan, only user waypoints. These waypoints have been saved to the system user waypoints. No flight plans stored in the system have been modified.
'No flight plan files found to import.'	The SD card contains no flight plan data.
'Flight plan import failed.'	Flight plan data was not successfully imported from the SD card.
'Flight plan partially imported.'	Some flight plan waypoints were successfully imported from the SD card, however others had errors and were not imported. A partial stored flight plan now exists in the system.
'File contained user waypoints only.'	The file stored on the SD card did not contain a flight plan, only user waypoints. One or more of these waypoints did not import successfully.
'Too many points. Flight plan truncated.'	The flight plan on the SD card contains more waypoints than the system can support. The flight plan was imported with as many waypoints as possible.
'Some waypoints not loaded. Waypoints locked.'	The flight plan on the SD card contains one or more waypoints the system cannot find in the navigation database. The flight plan has been imported, but must be edited within the system before it can be activated for use.
'User waypoint database full. Not all loaded.'	The flight plan file on the SD card contains user waypoints. The quantity of stored user waypoints has exceeded system capacity, therefore not all the user waypoints on the SD card have been imported. Any flight plan user waypoints that were not imported are locked in the flight plan. The flight plan must be edited within the system before it can be activated for use.
'One or more user waypoints renamed.'	One or more imported user waypoints were renamed when imported due to naming conflicts with waypoints already existing in the system.
'Flight plan successfully exported.'	The stored flight plan was successfully exported to the SD card.
'Flight plan export failed.'	The stored flight plan was not successfully exported to the SD card. The SD card may not have sufficient available memory or the card may have been removed prematurely.

Table 5-9 Flight Plan Import/Export Messages



NOTE: If the imported flight plan contains a waypoint with a name that duplicates the name of a waypoint already stored on the system, the system compares the coordinates of the imported waypoint with those of the existing waypoint. If the coordinates are different, the imported waypoint is automatically renamed by adding characters to the end of the name.



NOTE: The exported flight plan will not contain any procedures or airways.

Importing a Flight Plan from an SD Card:

- 1) Insert the SD card containing the flight plan in the top card slot on the MFD.
- 2) Press the **FPL** Key to display the 'FPL – Active Flight Plan' Page on the MFD.
- 3) Turn the small **FMS** Knob to select the 'FPL – Flight Plan Catalog' Page.
- 4) Press the **FMS** Knob to activate the cursor.
- 5) Turn either **FMS** Knob to highlight an empty or existing flight plan.
- 6) Press the **Import** Softkey; or press the **MENU** Key, select "Import Flight Plan", and press the **ENT** Key.

If an empty slot is selected, a list of the available flight plans on the SD card will be displayed.

Or:

If an existing flight plan is selected, an "Overwrite existing flight plan? OK or Cancel" prompt is displayed. Press the **ENT** Key to choose to overwrite the selected flight plan and see the list of available flight plans on the SD card. If overwriting the existing flight plan is not desired, select "Cancel" using the **FMS** Knob, press the **ENT** Key, select another flight plan slot, and press the **Import** Softkey again.

- 7) Turn the small **FMS** Knob to highlight the desired flight plan for importing.
- 8) Press the **ENT** Key to initiate the import.
- 9) Press the **ENT** Key again to confirm the import.

Exporting a flight plan to an SD Card:

- 1) Insert the SD card into the top card slot on the MFD.
- 2) Press the **FPL** Key to display the 'FPL – Active Flight Plan' Page on the MFD.
- 3) Turn the small **FMS** Knob to select the 'FPL – Flight Plan Catalog' Page.
- 4) Press the **FMS** Knob to activate the cursor.
- 5) Turn the large **FMS** Knob to highlight the flight plan to be exported.
- 6) Press the **Export** Softkey; or press the **MENU** Key, select "Export Flight Plan".
- 7) If desired, change the name for the exported file by turning the large **FMS** Knob to the left to highlight the name, then use the small and large **FMS** knobs to enter the new name, and press the **ENT** Key.
- 8) Press the **ENT** Key to initiate the export.
- 9) Press the **ENT** Key to confirm the export.

INVERTING THE ACTIVE FLIGHT PLAN

A flight plan may be inverted (reversed) for navigation back to the original departure point. Inverting and activating stored flight plans is discussed within the Stored Flight Plan Functions portion of this section.

Inverting the active flight plan:

- 1) Press the **FPL** Key to display the 'FPL – Active Flight Plan' Page (MFD) or the 'Flight Plan' Window (PFD).
- 2) Press the **MENU** Key, highlight 'Invert Flight Plan', and press the **ENT** Key. An 'Invert Active Flight Plan?' confirmation window is displayed.
- 3) Highlight 'OK'.
- 4) Press the **ENT** Key to invert and activate the active flight plan. To cancel, press the **CLR** Key, or highlight 'Cancel' and press the **ENT** Key.

DELETING THE ACTIVE FLIGHT PLAN

The active flight plan is overwritten when another flight plan is activated. Additionally, the system allows the pilot to delete the active flight plan, which suspends navigation by the system.

Deleting the active flight plan:

- 1) Press the **FPL** Key to display the 'FPL – Active Flight Plan' Page (MFD) or the Active 'Flight Plan' Window (PFD).
- 2) Press the **MENU** Key, highlight 'Delete Flight Plan', and press the **ENT** Key. The 'Delete all waypoints in flight plan?' window is displayed.
- 3) With 'OK' highlighted, press the **ENT** Key to delete the active flight plan. To cancel the request, press the **CLR** Key, or highlight 'Cancel' and press the **ENT** Key.

STORED FLIGHT PLAN FUNCTIONS

The system can store up to 99 flight plans, numbered 1 through 99. Details about each stored flight plan can be viewed on the 'FPL – Flight Plan Catalog' Page and on the 'FPL – Stored Flight Plan' Page.

A stored flight plan may be viewed or edited. The system also allows copying a flight plan into a new flight plan memory slot, allowing editing, etc., without affecting the original flight plan. This can be used to duplicate an existing stored flight plan for use in creating a modified version of the original stored flight plan.

Activating a stored flight plan erases the active flight plan and replaces it with the flight plan being activated. Inverting a stored flight plan reverses the waypoint order, erases the active flight plan, and replaces it with the flight plan being activated (the stored flight plan is not changed).

Lastly, individual or all stored flight plans can be deleted from the system memory.



Figure 5-56 Flight Plan Catalog

Viewing information about a stored flight plan:

- 1) Press the **FPL** Key on the MFD to display the 'FPL – Active Flight Plan' Page.
- 2) Turn the small **FMS** Knob clockwise one click to display the 'FPL – Flight Plan Catalog' Page.
- 3) Press the **FMS** Knob to activate the cursor and turn the **FMS** Knob to highlight the desired flight plan.
- 4) Information is displayed in the 'Flight Plan Info' Box showing departure, destination, total distance, and enroute safe altitude information for the selected Flight Plan.
- 5) Press the **Edit** Softkey to open the 'FPL – Stored Flight Plan' Page and view the waypoints in the flight plan.
- 6) Press the **FMS** Knob to exit the 'FPL – Stored Flight Plan' Page.

Storing an active flight plan from the 'FPL – Active Flight Plan' Page or the 'Flight Plan' Window:

- 1) Press the **MENU** Key.
- 2) Highlight 'Store Flight Plan'.
- 3) Press the **ENT** Key.
- 4) With 'OK' highlighted, press the **ENT** Key. The flight plan is stored in the next available position in the flight plan list on the 'FPL – Flight Plan Catalog' Page.

Activating a stored flight plan on the MFD:

- 1) Press the **FPL** Key and turn the small **FMS** Knob to display the 'FPL – Flight Plan Catalog' Page.
- 2) Press the **FMS** Knob to activate the cursor, and turn the **FMS** Knob to highlight the desired flight plan.
- 3) Press the **Activate** Softkey; or press the **ENT** Key twice; or press the **MENU** Key, highlight 'Activate Flight Plan', and press the **ENT** Key. The 'Activate stored flight plan?' window is displayed.
- 4) With 'OK' highlighted, press the **ENT** Key. To cancel the request, press the **CLR** Key, or highlight 'Cancel' and press the **ENT** Key.

Inverting and activating a stored flight plan on the MFD:

- 1) Press the **FPL** Key and turn the small **FMS** Knob to display the 'FPL – Flight Plan Catalog' Page.
- 2) Press the **FMS** Knob to activate the cursor, and turn the **FMS** Knob to highlight the desired flight plan.
- 3) Press the **Invert** Softkey; or press the **MENU** Key, highlight 'Invert & Activate FPL?', and press the **ENT** Key. The 'Invert and activate stored flight plan?' window is displayed.
- 4) With 'OK' highlighted, press the **ENT** Key. To cancel the request, press the **CLR** Key, or highlight 'Cancel' and press the **ENT** Key.

Copying a stored flight plan to another flight plan memory slot, on the MFD:

- 1) Press the **FPL** Key and turn the small **FMS** Knob to display the 'FPL – Flight Plan Catalog' Page.
- 2) Press the **FMS** Knob to activate the cursor, and turn the **FMS** Knob to highlight the desired flight plan.
- 3) Press the **Copy** Softkey; or press the **MENU** Key, highlight 'Copy Flight Plan', and press the **ENT** Key. The 'Copy to Flight Plan XX?' window is displayed.
- 4) With 'OK' highlighted, press the **ENT** Key to copy the flight plan. To cancel the request, press the **CLR** Key, or highlight 'Cancel' and press the **ENT** Key.

Deleting a stored flight plan:

- 1) Press the **FPL** Key and turn the small **FMS** Knob to display the 'FPL – Flight Plan Catalog' Page.
- 2) Press the **FMS** Knob to activate the cursor, and turn the **FMS** Knob to highlight the desired flight plan.
- 3) Press the **Delete** Softkey; press the **CLR** Key; or press the **MENU** Key, highlight 'Delete Flight Plan', and press the **ENT** Key. The 'Delete Flight Plan #?' window is displayed.
- 4) With 'OK' highlighted, press the **ENT** Key to delete the flight plan. To cancel the request, press the **CLR** Key, or highlight 'Cancel' and press the **ENT** Key.



NOTE: The option to delete all stored flight plans is not available while the aircraft is in flight.

Deleting all stored flight plans:

- 1) Press the **FPL** Key and turn the small **FMS** Knob to display the 'FPL – Flight Plan Catalog' Page.
- 2) Press the **MENU** Key.
- 3) Highlight 'Delete All' and press the **ENT** Key. A 'Delete all flight plans?' confirmation window is displayed.
- 4) With 'OK' highlighted, press the **ENT** Key to delete all flight plans. To cancel the request, press the **CLR** Key, or highlight 'Cancel' and press the **ENT** Key.

CHANGING A FLIGHT PLAN COMMENT (NAME)

Changing the active flight plan comment:

- 1) Press the **FPL** Key to display the 'FPL – Active Flight Plan' Page (MFD) or the 'Flight Plan' Window (PFD).
- 2) Press the **FMS** Knob to activate the cursor (not required on the PFD) and turn the large **FMS** Knob to highlight the comment field.
- 3) Use the **FMS** Knobs to edit the comment.
- 4) Press the **ENT** Key to accept the changes.
- 5) Press the **FMS** Knob to deactivate the flashing cursor.

Changing a stored flight plan comment:

- 1) Press the **FPL** Key to display the 'FPL – Active Flight Plan' Page.
- 2) Turn the small **FMS** Knob clockwise one click to display the 'FPL – Flight Plan Catalog' Page.
- 3) Press the **FMS** Knob to activate the cursor and turn the **FMS** Knob to highlight the flight plan to be edited.
- 4) Press the **Edit** Softkey; or press the **MENU** Key, select 'Edit Flight Plan' and press the **ENT** Key. The 'FPL – Stored Flight Plan' Page is displayed.
- 5) Turn the large **FMS** Knob to highlight the comment field.
- 6) Use the **FMS** Knobs to edit the comment.
- 7) Press the **ENT** Key to accept the changes.
- 8) Press the **FMS** Knob to remove the flashing cursor.

5.7 VERTICAL NAVIGATION



NOTE: The system supports vertical path guidance and altitude constraints for the following leg types: AF, CD, CF, CI, CR, DF, FC, FD, PI, RF, and TF. Altitude constraints are not retained in stored flight plans.

The system Vertical Navigation (VNV) feature provides vertical profile guidance during the enroute and terminal phases of flight. Guidance based on specified altitudes at waypoints in the active flight plan or to a direct-to waypoint is provided. It includes vertical path guidance to a descending path, which is provided as a linear deviation from the desired path. The desired path is defined by a line joining two waypoints with specified altitudes or as a vertical angle from a specified waypoint/altitude. The vertical waypoints are integrated into the active flight plan. Both manual and autopilot-coupled guidance are supported.

Vertical navigation is available for flight control operations when valid VNV data is entered in flight plan, and the **ENBL VNV** Softkey is selected (softkey label changes to 'Cncl VNV' once enabled) on the 'FPL – Active Flight Plan' Page. Refer to the AFCS Section for more information on activating the flight director and using the vertical navigation mode.

The system allows a vertical navigation direct-to for any waypoint in the active flight plan with an altitude constraint “designated” for vertical guidance. Selecting the **VNV Direct-to** Softkey on the Active Flight Plan Page allows the flight plan to be flown, while vertical guidance based on the altitude constraint at the VNV direct-to waypoint is provided. The altitude change begins immediately and is spread along the flight plan from current position to the vertical direct-to waypoint, not just along the leg for the direct-to waypoint. A direct-to with altitude constraint activated by pressing the **Direct-to** Key also provides vertical guidance, but would bypass flight plan waypoints between the current position in the flight plan and the direct-to waypoint. A top of descent (TOD) point is computed based on the default flight path angle; descent begins once the TOD is reached

Canceling vertical navigation results in vertical deviation (V DEV), vertical speed required (VS REQ), and time to top of descent/bottom of descent (TOD/BOD) going invalid. The Vertical Deviation Indicator (VDI) and Required Vertical Speed Indicator (RVSI) on the PFD are removed, and the V DEV, VS REQ, and TOD items displayed in the Active VNV Profile box are dashed. VNV remains disabled until manually enabled. Vertical guidance in reversionary mode can only be enabled for a direct-to waypoint.



NOTE: VNV is inhibited while automatic waypoint sequencing has been suspended.

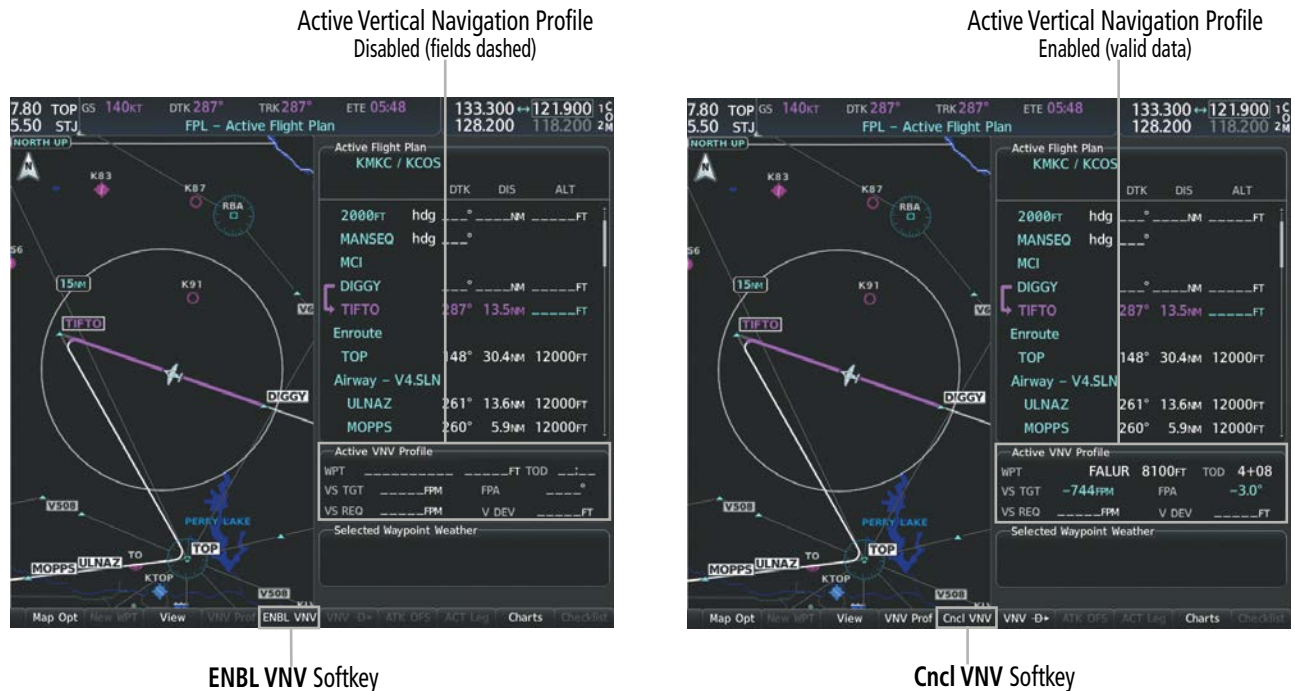


Figure 5-57 Enabling/Disabling Vertical Navigation

Enabling and Disabling VNV guidance:

- 1) Press the **FPL** Key on the MFD to display the 'FPL – Active Flight Plan' Page.
- 2) Press the **ENBL VNV** Softkey; or press the **MENU** Key, highlight 'Enable VNV', and press the **ENT** Key. Vertical navigation is enabled, and vertical guidance begins with the waypoint shown in the 'Active VNV Profile' Box (defaults first waypoint in the active flight plan with an altitude enabled for vertical navigation (e.g., FALUR)).
- 3) To Disable VNV guidance, press the **Cncl VNV** Softkey; or press the **MENU** Key, highlight 'Cancel VNV', and press the **ENT** Key. Vertical navigation is disabled.

Activating a vertical navigation direct-to:

- 1) Press the **FPL** Key on the MFD to display the 'FPL – Active Flight Plan' Page.
- 2) Press the **FMS** Knob to activate the cursor and turn the **FMS** Knob to highlight the desired waypoint.



NOTE: The selected waypoint must have a designated altitude constraint (cyan number) to be used. If not, the first waypoint in the flight plan with a designated altitude constraint is selected.

- 3) Press the **VNV Direct-To** Softkey; or press the **MENU** Key, highlight 'VNV Direct-To', and press the **ENT** Key. An 'Activate vertical Direct-to to: NNNNNFT at XXXXXX?' confirmation window is displayed.
- 4) Press the **ENT** Key. Vertical guidance begins to the altitude constraint for the selected waypoint.
- 5) Press the **FMS** Knob to remove the flashing cursor.

The vertical navigation profile can be modified by directly entering a vertical speed target (VS TGT) and/or flight path angle (FPA) in the 'Active VNV Profile' Box.

Modifying the VS TGT and FPA:

- 1) Press the **FPL** Key on the MFD to display the 'FPL – Active Flight Plan' Page.
- 2) Press the **VNV Prof** Softkey; or press the **MENU** Key, highlight 'Select VNV Profile Window', and press the **ENT** Key. The cursor is now located in the 'Active VNV Profile' Box.
- 3) Turn the **FMS** Knobs as needed to edit the values.
- 4) Press the **FMS** Knob to remove the flashing cursor.

ALTITUDE CONSTRAINTS

The system can use altitude constraints associated with lateral waypoints to give guidance for vertical navigation. These altitudes are, depending on the specific instance, manually entered or retrieved from the published altitudes in the navigation database.

Altitudes associated with arrival and approach procedures are "auto-designated". This means the system automatically provides descending vertical speed and deviation guidance to an altitude(s) chosen by the system for any waypoint prior to the FAF. These altitudes are displayed as cyan text. Additionally, altitudes can be manually designated prior to the FAF. The FAF can be manually designated if the selected approach provides no vertical guidance (i.e. glidepath). Manually designated altitudes are displayed as cyan text. For all designated altitudes, the system will automatically calculate altitude constraints prior to the designated altitude, which are displayed as white text.

The system will automatically calculate altitude constraints prior to the manually designated altitude, which are displayed as white text. System calculated altitudes can also be manually designated. Other displayed altitudes may change due to re-calculations or be rendered invalid as a result of manually changing an altitude to a designated altitude.

Altitudes that have been designated for use in vertical guidance can be "un-designated" using the **CLR** Key. The altitude is now displayed only as a reference (white text). It is not used to give vertical guidance. Other displayed altitudes may change due to re-calculations or be rendered invalid as a result of manually changing an altitude to a non-designated altitude.

Altitude constraints are displayed and entered in feet mean sea level (MSL) values to the nearest hundred. An altitude constraint in feet above ground level (AGL) format is supported for airports. When a database altitude restriction is displayed, the system allows entry of a different altitude when creating a waypoint, effectively overriding the database restriction (only before the FAF). When a database altitude restriction of type "AT or ABOVE" or "AT or BELOW" is activated, the system uses the "AT" portion of the restriction to define the vertical profile.

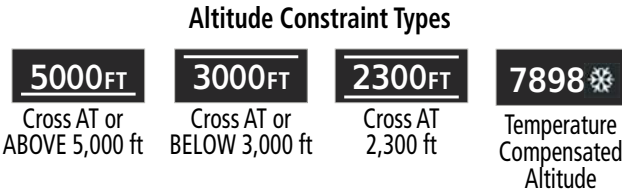
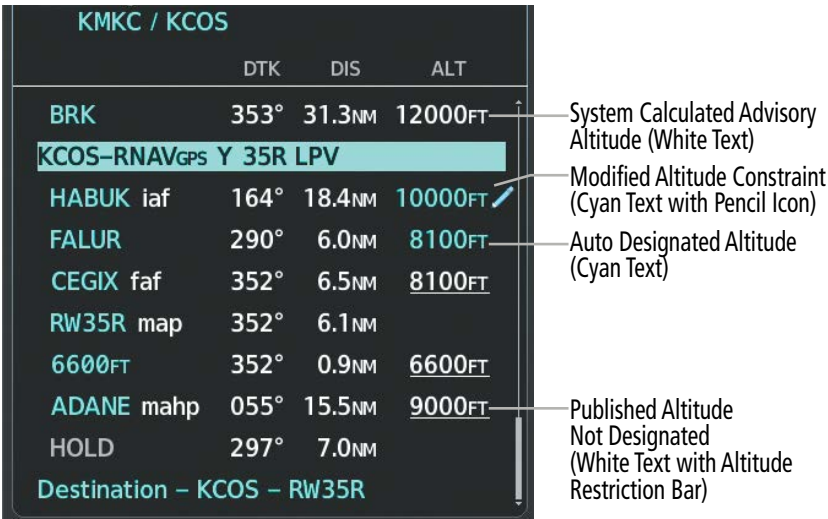


Figure 5-58 Waypoint Altitude Constraints

White Text	Cyan Text
5000FT Advisory altitude calculated by the system estimating the altitude of the aircraft as it passes the waypoint.	8600FT Altitude is designated for vertical guidance. A pencil icon indicates a manually modified altitude constraint.
5000FT Altitude retrieved from the navigation database. White line(s) above and/or below indicate the type of constraint, as shown in the preceding figure. These altitudes are provided as a reference, and are not designated to be used in determining vertical guidance.	8100FT The system cannot use this altitude in determining vertical guidance because of an invalid constraint condition.

Table 5-10 Altitude Constraint Legend

NOTE: All designated altitudes (cyan text) will be displayed in the active flight plan without restriction bars regardless of what is shown on the published procedure.

An altitude constraint is invalid or cannot be entered if:

- Meeting the constraint requires the aircraft to climb
- Meeting the constraint requires the maximum flight path angle or maximum vertical speed to be exceeded
- The altitude constraint results in a TOD behind the aircraft present position

- The constraint is within a leg type for which altitude constraints are not supported
- The altitude constraint is added to the FAF of an approach that provides vertical guidance (i.e., ILS or GPS SBAS approach)
- The altitude constraint is added to a waypoint past the FAF

Altitude constraints can be modified or deleted after having been added to the flight plan. In the event an altitude constraint is deleted and the navigation database contains an altitude restriction for the lateral waypoint, the system displays the altitude restriction from the database provided no predicted altitude can be provided. The system also provides a way to reinstate a published altitude constraint that has been edited.

Manually designating or editing a waypoint altitude constraint to be used for vertical guidance:

- 1) Press the **FPL** Key on the MFD to display the 'FPL – Active Flight Plan' Page.
- 2) Press the **FMS** Knob, and turn to highlight the desired waypoint altitude constraint.
- 3) Enter an altitude constraint value using the **FMS** Knobs. To enter altitudes as a flight level, turn the small **FMS** Knob counter-clockwise past zero or clockwise past 9 on the first character, and the system automatically changes to show units of Flight Level. Turn the large **FMS** Knob clockwise to highlight the first zero and enter the three digit flight level.
- 4) Press the **ENT** Key to accept the altitude constraint; if the selected waypoint is an airport, an additional choice is displayed. Turn the small **FMS** Knob to choose 'MSL' or 'AGL', and press the **ENT** Key to accept the altitude.

Removing an altitude constraint:

- 1) Press the **FPL** Key on the MFD to display the 'FPL – Active Flight Plan' Page.
- 2) Press the **FMS** Knob, and turn to highlight the desired waypoint altitude constraint.
- 3) Press the **CLR** Key. A 'Remove VNV altitude?' confirmation window is displayed.
- 4) Select 'OK' and press the **ENT** Key.

Reverting a manually entered altitude constraint back to the navigation database value:

- 1) Press the **FPL** Key on the MFD to display the 'FPL – Active Flight Plan' Page.
- 2) Press the **FMS** Knob, and turn to highlight the desired waypoint altitude constraint.
- 3) Press the **CLR** Key. A 'Remove or Revert to published VNV altitude of nnnnnFT?' confirmation window is displayed.
- 4) Select 'REVERT' and press the **ENT** Key. The altitude is changed to the navigation database value.
- 5) Press the **FMS** Knob to remove the flashing cursor.

VERTICAL SITUATION DISPLAY (VSD)

A Vertical Situation Display (VSD) can be shown on the bottom of the Navigation Map Page. The terrain, obstacles, vertical track vector, selected altitude, and active flight plan information (active flight plan information

Terrain/obstacles are available on the VSD, and will be shown if the aircraft altitude is low enough for the terrain/obstacles to be in view (terrain will be shown in gray if the terrain is selected Off on the Navigation Map). The depicted terrain profile represents an approximate forward-looking contour of the terrain based upon the highest reported terrain elevations, measured at intervals defined by the terrain database resolution, within a predefined width along the active flight plan between the aircraft present position and the end of the map range or active flight plan. The predefined width is determined by the flight phase.



NOTE: Certain leg types (e.g. holds, heading legs) do not support VNV PATH descents because the lateral distance of those legs is unknown. The VSD will not show a VNV profile for any legs that have no vertical path guidance.

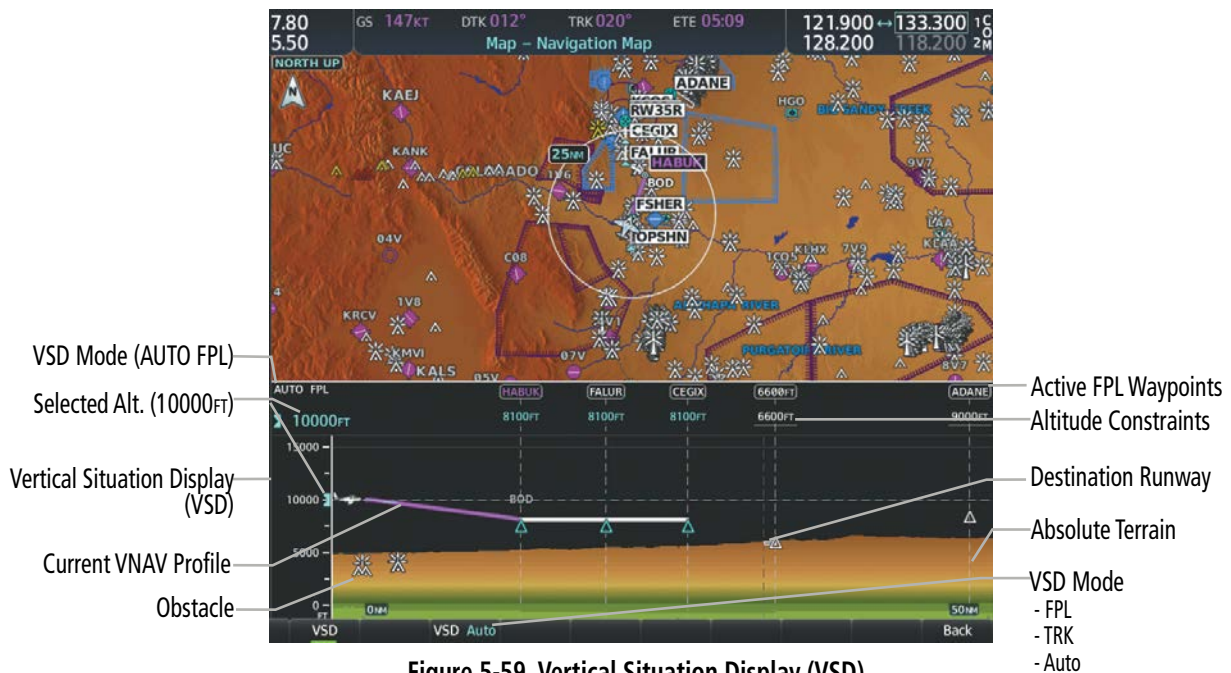


Figure 5-59 Vertical Situation Display (VSD)

VSD Mode Button	Displayed Mode	FPL Criteria	Items available on VSD
Auto	AUTO FPL	Available active FPL & aircraft within FPL swath	Terrain/obstacles along the active flight plan route, vertical track vector, selected altitude, and active flight plan information*
	AUTO TRK	(1) Active FPL available & aircraft not within FPL swath, or (2) Active FPL not available	Terrain/obstacles along the current track, vertical track vector, and selected altitude
Flight Plan	FPL	Active FPL available	Terrain/obstacles along the active flight plan route, vertical track vector, selected altitude, and active flight plan information*
		Active FPL not available	Only shows message 'Flight Plan Not Available'
Track	TRK	NA	Terrain/obstacles along the current track, vertical track vector, and selected altitude

* Active flight plan information consists of waypoints, associated altitude constraints, current VNV profile, TOD/BOD, and destination runway

Table 5-11 VSD Modes

VSD MESSAGES

Under certain conditions, some messages may appear in conjunction with others.

Message	Description
'Loading...'	VSD is loading data due to a range change, full/half switch, or first being selected for display.
'Flight Plan Not Available'	Flight Plan mode is selected and there is not a flight plan loaded with at least one leg.
'Flight Plan mode unavailable because aircraft off course and active leg over 200 NM'	All of the following are true: - Flight Plan mode is selected - The active leg is greater than 200 nm - The aircraft is outside the swath
'Aircraft Beyond Active Leg'	Flight Plan mode is selected and the aircraft's position, as projected on the flight plan, is past the end of the active leg.
'VSD Not Available'	At least one of the following is true: - Valid terrain database not available - GPS MSL altitude not available - Current barometric altitude not available - Neither current track nor current heading available - GPS position not available - Map range setting is less than 1 nm
'VSD Data is old, disable and enable VSD'	The system has encountered a delay and VSD data has failed to update for 2 seconds or more. This message may be momentarily displayed and then removed as the delay is overcome.

Table 5-12 VSD Messages

Flight Phase	Width of Swath
Approach, Departure	0.6 nm
Terminal	2.0 nm
En Route, Oceanic	4.0 nm

Enabling the Vertical Situation Display:

- 1) Select the 'Map – Navigation Map' Page.
- 2) Press the **Map Opt** Softkey.
- 3) Press the **Inset** Softkey.
- 4) Press the **VSD** Softkey to enable the Vertical Situation Display.
- 5) Press the VSD Mode softkey to choose between **Auto**, **FPL**, or **TRK**.

Or:

- 1) Select the 'Map – Navigation Map' Page.
- 2) Press the **MENU** Key.
- 3) Turn the **FMS** Knob to highlight 'Show VSD' and press the **ENT** Key.
- 4) Press the **Map Opt** Softkey
- 5) Press the **Inset** Softkey
- 6) Press the VSD Mode softkey to choose between **Auto**, **FPL**, or **TRK**.

Disabling the Vertical Situation Display:

- 1) Select the 'Map – Navigation Map' Page.
- 2) Press the **Map Opt** Softkey.
- 3) Press the **Inset** Softkey
- 4) Press the **Off** Softkey.

Or:

- 1) Select the 'Map – Navigation Map' Page.
- 2) Press the **MENU** Key.
- 3) Turn the **FMS** Knob to highlight 'Hide VSD' and press the **ENT** Key.

5.8 PROCEDURES

The system can access the whole range of instrument procedures available. Departures (DPs), arrivals (STARs), and non-precision and precision approaches (APRs) are stored within the database and can be loaded using any Procedures (**PROC**) Key.

NOTE: The navigation databases used in Garmin navigation systems contain Special Procedures. Prior to flying these procedures, pilots must have specific FAA authorization, training, and possession of the corresponding current, and legitimately-sourced chart (approach plate, etc.). Inclusion of the Special Procedure in the navigation database DOES NOT imply specific FAA authorization to fly the procedure.

The selected procedure for the departure or arrival airport is added to the active flight plan. No waypoints are required to be in the active flight plan to load procedures; however, if the origin and destination airport are already loaded, the procedure loading window defaults to the appropriate airport, saving some time selecting the correct airport on the Procedure Loading Page. Furthermore, only one procedure for each type of procedure (DP, STAR, APPR) can be loaded at a time in a flight plan.

The system adds terminal procedures to the flight plan based on leg types coded within that procedure in the navigation database. If the terminal procedure in the flight plan contains an identifier like ‘6368FT’, that indicates a leg that terminates when the specified altitude (6368 feet) has been exceeded. A heading leg in the flight plan displays ‘hdg’ preceding the DTK (e.g. ‘hdg 008°’). A flight plan leg requiring the pilot to manually initiate sequencing to the next leg displays ‘MANSEQ’ as the identifier.



Figure 5-60 Procedure Leg Identifiers

Viewing available procedures at an airport:

- 1) From the 'WPT – Airport Information' Page (first page in the 'WPT' Page Group):
Press the **DP** Softkey. The 'WPT – Departure Information' Page is displayed, defaulting to the airport displayed on the 'WPT – Airport Information' Page.
Or.
Press the **STAR** Softkey. The 'WPT – Arrival Information' Page is displayed, defaulting to the airport displayed on the 'WPT – Airport Information' Page.
Or.
Press the **APR** Softkey. The 'WPT – Approach Information' Page is displayed, defaulting to the airport displayed on the 'WPT – Airport Information' Page.
- 2) Press the **FMS** Knob to activate the cursor. To select another airport, enter an identifier/facility name/city, and press the **ENT** Key.
- 3) Turn the large **FMS** Knob to highlight the desired procedure. The procedure is previewed on the map.
- 4) Turn the small **FMS** Knob to scroll through the available procedures. Press the **ENT** Key to select the procedure. The cursor moves to the next box (runway or transition). The procedure is previewed on the map.
- 5) Turn the **FMS** Knobs, as required, to highlight a runway or transition. Press the **ENT** Key to select the runway or transition. The cursor moves to the next box. The procedure is previewed on the map.
- 6) Repeat Step 5, until desired information has been viewed for the chosen procedure.
- 7) Press the **FMS** Knob to deactivate the flashing cursor.

DEPARTURES

A Departure Procedure (DP) is loaded at the departure airport in the flight plan. Only one departure can be loaded at a time in a flight plan. If a departure is loaded when another departure is already in the active flight plan, the new departure replaces the previous departure. The route is defined by selection of a departure, the transition waypoints, and a runway.

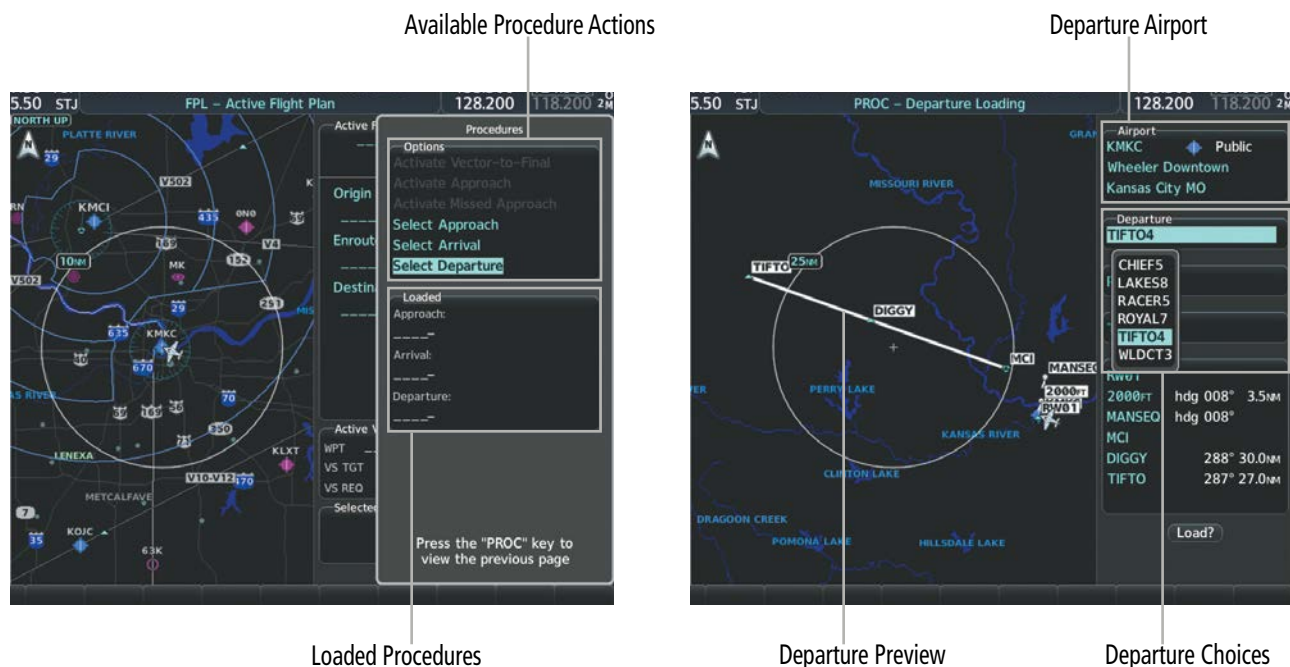


Figure 5-61 Departure Selection

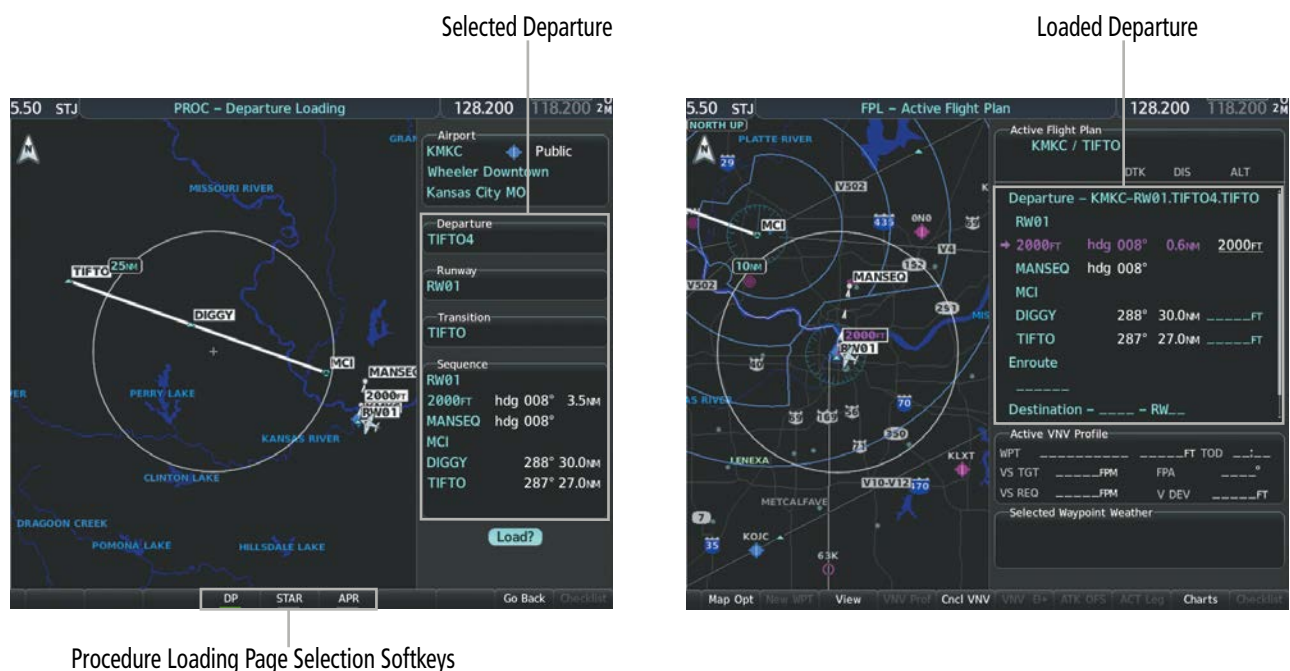


Figure 5-62 Departure Loading

Loading a departure into the active flight plan using the **PROC** Key:

- 1) Press the **PROC** Key. The 'Procedures' Window is displayed.
- 2) Highlight 'Select Departure'.
- 3) Press the **ENT** Key. The 'PROC – Departure Loading' Page is displayed.
- 4) Use the **FMS** Knob to select an airport and press the **ENT** Key.
- 5) Select a departure from the list and press the **ENT** Key.
- 6) Select a runway (if required) and press the **ENT** Key.
- 7) Select a transition (if required) and press the **ENT** Key. 'Load?' is highlighted.
- 8) Press the **ENT** Key to load the departure procedure.

Loading a departure into the active flight plan from the 'WPT – Departure Information' Page:

- 1) From the 'WPT – Airport Information' Page (first page in the 'WPT' Page Group), press the **DP** Softkey. The 'WPT – Departure Information' Page is displayed, defaulting to the airport displayed on the 'WPT – Airport information' Page.
- 2) To select another airport, press the **FMS** Knob to activate the cursor, enter an identifier/facility name/city, and press the **ENT** Key.
- 3) Select a different departure, if desired.
 - a) Turn the large **FMS** Knob to highlight the Departure. The departure is previewed on the map.
 - b) Turn the small **FMS** Knob to view the available departures. Press the **ENT** Key to select the departure. The cursor moves to the 'Runway' Box. The departure is previewed on the map.
 - c) Turn the small **FMS** Knob to view the available runways. Press the **ENT** Key to select the runway. The cursor moves to the 'Transition' Box (only if there are available transitions). The departure is previewed on the map.
 - d) Turn the small **FMS** Knob to view the available transitions. Press the **ENT** Key to select the transition. The cursor moves to the 'Sequence' Box. The departure is previewed on the map.
- 4) Press the **MENU** Key to display the 'Page Menu' Window.
- 5) Turn the **FMS** Knob to highlight 'Load Departure'.
- 6) Press the **ENT** Key to load the departure procedure into the active flight plan.

Loading a departure procedure into a stored flight plan:

- 1) Select a stored flight plan from the 'FPL – Flight Plan Catalog' Page.
- 2) Press the **Edit** Softkey; or press the **MENU** Key, select 'Edit Flight Plan', and press the **ENT** Key. The 'FPL – Stored Flight Plan' Page is displayed.
- 3) Press the **LD DP** Softkey; or press the **MENU** Key, select "Load Departure", and press the **ENT** Key. The 'PROC – Departure Loading' Page is displayed.
- 4) Select a departure. Press the **ENT** Key.
- 5) Select a runway served by the selected departure, if required. Press the **ENT** Key.
- 6) Select a transition for the selected departure. Press the **ENT** Key.
- 7) Press the **ENT** Key to load the selected departure procedure.

Removing a departure procedure from the active flight plan:

- 1) Press the **FPL** Key to display the 'FPL – Active Flight Plan' Page (MFD) or the 'Flight Plan' Window (PFD).
- 2) Press the **MENU** Key, and highlight 'Remove Departure'.
- 3) Press the **ENT** Key. A confirmation window is displayed listing the departure procedure.
- 4) With 'OK' highlighted, press the **ENT** Key. To cancel the removal request, highlight 'Cancel' and press the **ENT** Key.

Or:

- 1) Press the **FPL** Key to display the 'FPL – Active Flight Plan' Page (MFD) or the 'Flight Plan' Window (PFD).
- 2) Press the **FMS** Knob, and turn to highlight the departure header in the active flight plan.
- 3) Press the **CLR** Key. A confirmation window is displayed listing the departure procedure.
- 4) With 'OK' highlighted, press the **ENT** Key. To cancel the removal request, highlight 'Cancel' and press the **ENT** Key.
- 5) Press the **FMS** Knob to remove the flashing cursor.

Removing a departure from a stored flight plan:

- 1) Press the **FPL** Key to display the 'FPL – Active Flight Plan' Page.
 - 2) Turn the small **FMS** Knob clockwise one click to display the 'FPL – Flight Plan Catalog' Page.
 - 3) Press the **FMS** Knob to activate the cursor and turn the **FMS** Knob to highlight the flight plan to be edited.
 - 4) Press the **EDIT** Softkey; or press the **MENU** Key, select 'Edit Flight Plan' and press the **ENT** Key. The 'FPL – Stored Flight Plan' Page is displayed.
 - 5) Highlight and remove the departure:
 - a) Turn the large **FMS** Knob to highlight the header of the departure.
 - b) Press the **CLR** Key. The 'Remove <procedure name> from flight plan?' window is displayed.
- Or:
- a) Press the **MENU** Key to display the 'Page Menu' Window and turn the **FMS** Knob to highlight 'Remove Departure'.
 - b) Press the **ENT** Key. The 'Remove <procedure name> from flight plan?' window is displayed.
- 6) With 'OK' highlighted, press the **ENT** Key. To cancel the request, press the **CLR** Key, or highlight 'Cancel' and press the **ENT** Key.
 - 7) Press the **FMS** Knob to remove the flashing cursor.

ARRIVALS

A Standard Terminal Arrival (STAR) can be loaded at any airport that has one available. Only one arrival can be loaded at a time in a flight plan. If an arrival is loaded when another arrival is already in the active flight plan, the new arrival replaces the previous arrival. The route is defined by selection of an arrival, the transition waypoints, and a runway.

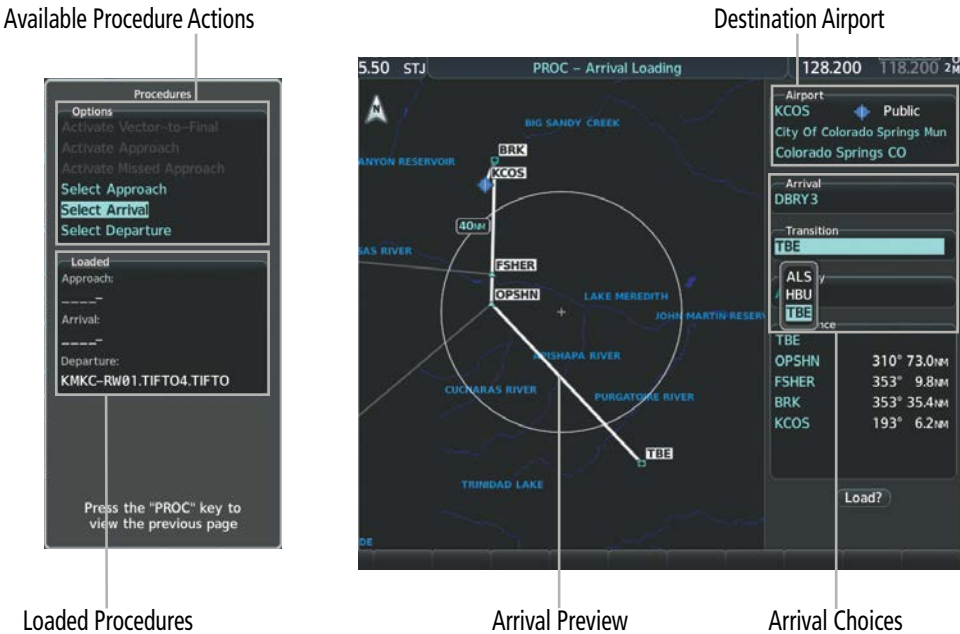


Figure 5-63 Arrival Selection



Figure 5-64 Arrival Loading

Loading an arrival into the active flight plan using the **PROC** Key:

- 1) Press the **PROC** Key. The 'Procedures' Window is displayed.
- 2) Highlight 'Select Arrival'.
- 3) Press the **ENT** Key. The 'PROC – Arrival Loading' Page is displayed.
- 4) Use the **FMS** Knob to select an airport and press the **ENT** Key.
- 5) Select an arrival from the list and press the **ENT** Key.
- 6) Select a transition (if required) and press the **ENT** Key.
- 7) Select a runway (if required) and press the **ENT** Key. 'Load?' is highlighted.
- 8) Press the **ENT** Key to load the arrival procedure

Loading an arrival into the active flight plan from the 'WPT – Arrival Information' Page:

- 1) From the 'WPT – Airport Information' Page (first page in the WPT group), press the **STAR** Softkey. The 'WPT – Arrival Information' Page is displayed, defaulting to the airport displayed on the 'WPT – Airport Information' Page.
- 2) To select another airport, press the **FMS** Knob to activate the cursor, enter an identifier/facility name/city, and press the **ENT** Key.
- 3) Select a different arrival, if desired.
 - a) Turn the large **FMS** Knob to highlight the arrival. The arrival is previewed on the map.
 - b) Turn the small **FMS** Knob to view the available arrivals. Press the **ENT** Key to select the arrival. The cursor moves to the 'Transition' Box (only if there are available transitions). The arrival is previewed on the map.
 - c) Turn the small **FMS** Knob to view the available transitions. Press the **ENT** Key to select the transition. The cursor moves to the 'Runway' Box. The arrival is previewed on the map.
 - d) Turn the small **FMS** Knob to view the available runways. Press the **ENT** Key to select the runway. The cursor moves to the 'Sequence' Box. The arrival is previewed on the map.
- 4) Press the **MENU** Key to display the Arrival Information 'Page Menu' Window.
- 5) Turn the **FMS** Knob to highlight 'Load Arrival'.
- 6) Press the **ENT** Key to load the arrival procedure into the active flight plan.

Loading an arrival procedure into a stored flight plan:

- 1) Select a stored flight plan from the 'FPL – Flight Plan Catalog' Page.
- 2) Press the **Edit** Softkey; or press the **MENU** Key, select 'Edit Flight Plan', and press the **ENT** Key. The 'FPL – Stored Flight Plan' Page is displayed.
- 3) Press the **LD STAR** Softkey; or press the **MENU** Key, select "Load Arrival", and press the **ENT** Key. The 'PROC – Arrival Loading' Page is displayed.
- 4) Select an arrival. Press the **ENT** Key.
- 5) Select a transition for the selected arrival. Press the **ENT** Key.
- 6) Select a runway served by the selected arrival, if required. Press the **ENT** Key.
- 7) Press the **ENT** Key to load the selected arrival procedure.

Removing an arrival from the active flight plan:

- 1) Press the **FPL** Key to display the 'FPL – Active Flight Plan' Page (MFD) or the 'Flight Plan' Window (PFD).
 - 2) Press the **MENU** Key, and highlight 'Remove Arrival'.
 - 3) Press the **ENT** Key. A confirmation window is displayed listing the arrival procedure.
 - 4) With 'OK' highlighted, press the **ENT** Key. To cancel the removal request, highlight 'Cancel' and press the **ENT** Key.
- Or:

- 1) Press the **FPL** Key to display the 'FPL – Active Flight Plan' Page (MFD) or the 'Flight Plan' Window (PFD).
- 2) Press the **FMS** Knob, and turn to highlight the arrival header in the active flight plan.
- 3) Press the **CLR** Key. A confirmation window is displayed listing the arrival procedure.
- 4) With 'OK' highlighted, press the **ENT** Key. To cancel the removal request, highlight 'Cancel' and press the **ENT** Key.
- 5) Press the **FMS** Knob to remove the flashing cursor.

Removing an arrival from a stored flight plan:

- 1) Press the **FPL** Key to display the 'FPL – Active Flight Plan' Page.
- 2) Turn the small **FMS** Knob clockwise one click to display the 'FPL – Flight Plan Catalog' Page.
- 3) Press the **FMS** Knob to activate the cursor and turn the **FMS** Knob to highlight the flight plan to be edited.
- 4) Press the **EDIT** Softkey; or press the **MENU** Key, select 'Edit Flight Plan' and press the **ENT** Key. The 'FPL – Stored Flight Plan' Page is displayed.
- 5) Highlight and remove the arrival:
 - a) Turn the large **FMS** Knob to highlight the header of the arrival.
 - b) Press the **CLR** Key. The 'Remove <procedure name> from flight plan?' window is displayed.

Or:

 - a) Press the **MENU** Key to display the 'Page Menu' Window and turn the **FMS** Knob to highlight 'Remove Arrival'.
 - b) Press the **ENT** Key. The 'Remove <procedure name> from flight plan?' window is displayed.
- 6) With 'OK' highlighted, press the **ENT** Key. To cancel the request, press the **CLR** Key, or highlight 'Cancel' and press the **ENT** Key.
- 7) Press the **FMS** Knob to remove the flashing cursor.

APPROACHES

INSTRUMENT APPROACH



NOTE: If certain GPS parameters (SBAS, RAIM, etc.) are not available, some published approach procedures for the desired airport may not be displayed in the list of available approaches.

An Approach Procedure (APR) can be loaded at any airport that has one available, and provides guidance for non-precision and precision approaches to airports with published instrument approach procedures. Only one approach can be loaded at a time in a flight plan. If an approach is loaded when another approach is already in the active flight plan, the new approach replaces the previous approach. The route is defined by selection of an approach and the transition waypoints.

When selecting an approach, a “GPS” designation to the right of the procedure name indicates the procedure can be flown using the GPS receiver. Some procedures do not have this designation, meaning the GPS receiver can be used for supplemental navigation guidance only. If the GPS receiver cannot be used for primary guidance, the appropriate navigation receiver must be used for the selected approach (e.g., VOR or ILS). The final course segment of ILS approaches, for example, must be flown by tuning the NAV receiver to the proper frequency and selecting that NAV receiver on the CDI.

The SBAS GPS allows for flying LNAV, LNAV+V, LNAV/VNAV, LP, LP+V, and LPV approach service levels according to the published chart. LNAV+V is an LNAV with advisory vertical guidance provided for assistance in maintaining a constant vertical glidepath similar to an ILS glideslope on approach. This guidance is displayed on the system PFD in the same location as the ILS glideslope using a magenta diamond. In all cases where LNAV+V is indicated by the system during an approach, LNAV minima are used. The active approach service level is annunciated on the HSI as shown in the following table:

HSI Annunciation	Description	Example on HSI
LNAV	RNAV GPS approach using published LNAV minima	 Approach Service Level - LNAV, LNAV+V, L/VNAV, LP, LP+V, LPV
LNAV+V	RNAV GPS approach using published LNAV minima. Advisory vertical guidance is provided.	
L/VNAV (available only if SBAS available)	RNAV GPS approach using published LNAV/VNAV minima (downgrades to LNAV if SBAS unavailable)	
LP (available only if SBAS available)	RNAV GPS approach using published LP minima (downgrades to LNAV if SBAS unavailable)	
LP+V (available only if SBAS available)	RNAV GPS approach using published LP minima. Advisory vertical guidance is provided (downgrades to LNAV if SBAS unavailable)	
LPV (available only if SBAS available)	RNAV GPS approach using published LPV minima (downgrades to LNAV if SBAS unavailable)	


Table 5-13 Approach Service Levels

Available Procedure Actions



Loaded Procedures

Destination Airport

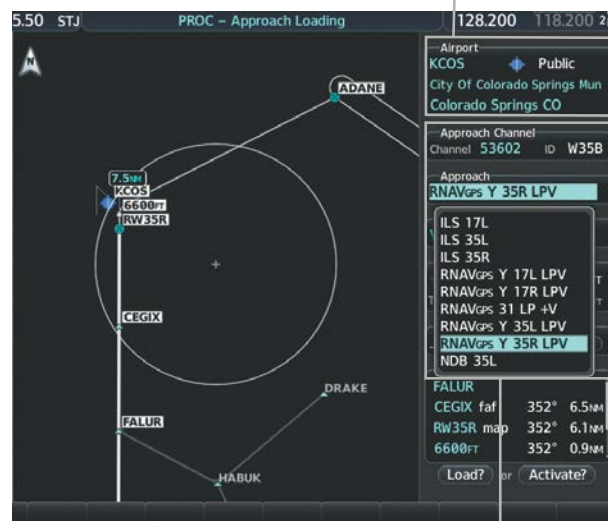

Approach Choices

Figure 5-65 Approach Selection

Selected Approach



Procedure Loading Page Selection Softkeys

Loaded Approach



Figure 5-66 Approach Loading

APPROACH SELECTION AND REMOVAL

Whenever an approach is selected, the choice to either ‘Load’ or ‘Activate’ is given. ‘Load’ adds the approach to the end of the flight plan without immediately using it for navigation guidance. This allows continued navigation via the intermediate waypoints in the original flight plan, but keeps the procedure available for quick activation when needed. ‘Activate’ also adds the procedure to the end of the flight plan but immediately begins to provide guidance to the first waypoint in the approach.

In many cases, it may be easiest to load the full approach while still some distance away, enroute to the destination airport. Later, if vectored to final, use the steps below to select 'Activate Vector-To- Final' — which makes the inbound course to the FAF waypoint active.



NOTE: When GPS is not approved for the selected final approach course, the message '- NOT APPROVED FOR GPS -' is displayed. GPS provides guidance to the approach, but the HSI must be switched to a NAV receiver to fly the final course of the approach.



NOTE: When there is no arrival procedure in the flight plan, loading an approach after a destination airport has already been entered will result in a duplicate destination airport waypoint being added to the end of the enroute segment.

Loading an approach into the active flight plan using the PROC Key:

- 1) Press the **PROC** Key. The 'Procedures' Window is displayed.
- 2) Highlight 'Select Approach', and press the **ENT** Key. The 'PROC – Approach Loading' Page is displayed.
- 3) Select the airport and approach:
 - a) Use the **FMS** Knob to select an airport and press the **ENT** Key.
 - b) Select an approach from the list and press the **ENT** Key.

Or:

 - a) If necessary, push the **FMS** Knob to exit the approach list, and use the large **FMS** Knob to move the cursor to the 'Channel' Field.
 - b) Use the **FMS** Knob to enter the approach channel number, and press the **ENT** Key to accept the approach channel number. The airport and approach are selected.
- 4) Select a transition (if required) and press the **ENT** Key.
- 5) Minimums
 - a) To set approach minimums, turn the small **FMS** Knob to select 'BARO' or 'TEMP COMP' and press the **ENT** Key. Turn the small **FMS** Knob to select the altitude, and press the **ENT** Key.
 - b) If 'TEMP COMP' was selected, the cursor moves to the temperature field. Turn the small **FMS** Knob to select the temperature, and press the **ENT** Key.

Or:

To skip setting minimums, select 'OFF' and press the **ENT** Key.
- 6) Press the **ENT** Key with 'Load?' highlighted to load the approach procedure; or turn the large **FMS** Knob to highlight 'Activate' and press the **ENT** Key to load and activate the approach procedure.

When GPS is not approved for the selected final approach course, the message '- NOT APPROVED FOR GPS - GPS guidance is for monitoring only. Load approach?' is displayed. With 'Yes' highlighted, press the **ENT** Key.

Loading an approach into the active flight plan from the 'NRST – Nearest Airport' Page:

- 1) Select the 'NRST – Nearest Airports' Page.
- 2) Press the **FMS** Knob, then turn the large **FMS** Knob to highlight the desired nearest airport. The airport is previewed on the map.
- 3) Press the **APR** Softkey; or press the **MENU** Key, highlight 'Select Approach Window', and press the **ENT** Key.
- 4) Turn the **FMS** Knob to highlight the desired approach.
- 5) Press the **LD APR** Softkey; or press the **MENU** Key, highlight 'Load Approach', and press the **ENT** Key. The 'PROC – Approach Loading' Page is displayed with the 'Transition' Field highlighted.
- 6) Turn the **FMS** Knob to highlight the desired transition, and press the **ENT** Key.
- 7) Minimums
 - a) To set 'Minimums', turn the small **FMS** Knob to select 'BARO' or 'TEMP COMP' and press the **ENT** Key. Turn the small **FMS** Knob to select the altitude, and press the **ENT** Key.
 - b) If 'TEMP COMP' was selected, the cursor moves to the temperature field. Turn the small **FMS** Knob to select the temperature, and press the **ENT** Key.

Or:

To skip setting minimums, press the **ENT** Key. The 'Load?' field is highlighted.

- 8) Press the **ENT** Key with 'Load?' highlighted to load the approach procedure; or turn the large **FMS** Knob to highlight 'Activate?' and press the **ENT** Key to load and activate the approach procedure.

When GPS is not approved for the selected final approach course, the message '- NOT APPROVED FOR GPS - GPS guidance is for monitoring only. Load approach?' is displayed. With 'Yes' highlighted, press the **ENT** Key.

Loading an approach procedure into a stored flight plan:

- 1) Select a stored flight plan from the 'FPL – Flight Plan Catalog' Page.
 - 2) Press the **Edit** Softkey; or press the **MENU** Key, select 'Edit Flight Plan', and press the **ENT** Key. The 'FPL – Stored Flight Plan' Page is displayed.
 - 3) Press the **LD APR** Softkey; or press the **MENU** Key, select "Load Approach", and press the **ENT** Key. The 'PROC – Approach Loading' Page is displayed.
 - 4) Select the airport and approach:
 - a) Use the **FMS** Knob to select an airport and press the **ENT** Key.
 - b) Select an approach from the list and press the **ENT** Key.
- Or:
- a) If necessary, push the **FMS** Knob to exit the approach list, and use the large **FMS** Knob to move the cursor to the Approach 'Channel' Field.
 - b) Use the **FMS** Knob to enter the approach channel number, and press the **ENT** Key to accept the approach channel number. The airport and approach are selected.
- 5) Select a transition for the selected approach. Press the **ENT** Key.
 - 6) Press the **ENT** Key to load the selected approach procedure.

Activating a previously loaded approach:

- 1) Press the **PROC** Key. The 'Procedures' Window is displayed with 'Activate Approach' highlighted.
- 2) Press the **ENT** Key to activate the approach.

Activating a previously loaded approach with vectors to final:

- 1) Press the **PROC** Key to display the 'Procedures' Window.
- 2) Highlight 'Activate Vector-to-Final' and press the **ENT** Key.

Loading and activating an approach using the MENU Key:

- 1) Press the **PROC** Key.
- 2) Use the large **FMS** Knob to highlight 'Select Approach' and press the **ENT** Key.
- 3) From the 'PROC – Approach Loading' Page, press the **MENU** Key on the MFD. The 'Page Menu' Window is displayed with 'Load & Activate Approach' highlighted.
- 4) Press the **ENT** Key.

When GPS is not approved for the selected final approach course, the message '- NOT APPROVED FOR GPS - GPS guidance is for monitoring only. Load approach?' is displayed. With 'Yes' highlighted, press the **ENT** Key.

Removing an approach from the active flight plan:

- 1) Press the **FPL** Key to display the 'FPL – Active Flight Plan' Page (MFD) or the 'Flight Plan' Window (PFD).
- 2) Press the **MENU** Key, and highlight 'Remove Approach'.
- 3) Press the **ENT** Key. A confirmation window is displayed listing the approach procedure.
- 4) With 'OK' highlighted, press the **ENT** Key. To cancel the removal, highlight 'Cancel' and press the **ENT** Key.

Or:

- 1) Press the **FPL** Key to display the 'FPL – Active Flight Plan' Page (MFD) or the 'Flight Plan' Window (PFD).
- 2) Press the **FMS** Knob to activate the cursor, and turn to highlight the approach header in the active flight plan.
- 3) Press the **CLR** Key. A confirmation window is displayed listing the approach procedure.
- 4) With 'OK' highlighted, press the **ENT** Key. To cancel the removal, highlight 'Cancel' and press the **ENT** Key.
- 5) Press the **FMS** Knob to deactivate the flashing cursor.

Removing an approach from a stored flight plan:

- 1) Press the **FPL** Key to display the 'FPL – Active Flight Plan' Page.
- 2) Turn the small **FMS** Knob clockwise one click to display the 'FPL – Flight Plan Catalog' Page.
- 3) Press the **FMS** Knob to activate the cursor and turn the **FMS** Knob to highlight the flight plan to be edited.
- 4) Press the **EDIT** Softkey; or press the **MENU** Key, select 'Edit Flight Plan' and press the **ENT** Key. The 'FPL – Stored Flight Plan' Page is displayed.

- 5) Highlight and remove the approach:
 - a) Turn the large **FMS** Knob to highlight the header of the approach.
 - b) Press the **CLR** Key. The 'Remove <procedure name> from flight plan?' window is displayed.
 Or:
 - a) Press the **MENU** Key to display the 'Page Menu' Window and turn the **FMS** Knob to highlight 'Remove Approach'.
 - b) Press the **ENT** Key. The 'Remove <procedure name> from flight plan?' window is displayed.
- 6) With 'OK' highlighted, press the **ENT** Key. To cancel the request, press the **CLR** Key, or highlight 'Cancel' and press the **ENT** Key.
- 7) Press the **FMS** Knob to remove the flashing cursor.

MISSED APPROACH

In this missed approach procedure, the altitude immediately following the MAP (in this case '6600FT') is not part of the published procedure. It is simply a Course to Altitude (CA) leg which guides the aircraft along the runway centerline until the altitude required to safely make the first turn toward the MAHP is exceeded. This altitude is provided by the navigation database, and may be below, equal to, or above the published minimums for this approach. In this case, if the aircraft altitude is below the specified altitude (6,600 feet) after crossing the MAP, a direct-to is established to provide a course on runway heading until an altitude of 6,600 feet is reached. After reaching 6,600 feet, a direct-to is established to the published MAHP (in this case ADANE). If the aircraft altitude is above the specified altitude after crossing the MAP, a direct-to is established to the published fix (ADANE) to begin the missed approach procedure.



Figure 5-67 Course to Altitude

In some missed approach procedures this Course to Altitude leg may be part of the published procedure. For example, a procedure may dictate a climb to 5,500 feet, then turn left and proceed to the Missed Approach Hold Point (MAHP). In this case, the altitude would appear in the list of waypoints as '5500FT'. Again, if the aircraft altitude is lower than the prescribed altitude, a direct-to is established on a Course to Altitude leg when the missed approach procedure is activated.

Activating a missed approach in the active flight plan:

- 1) Press the **PROC** Key.
- 2) Turn the **FMS** Knob to highlight 'Activate Missed Approach'.
- 3) Press the **ENT** Key. The aircraft automatically sequences to the MAHP.

Or:

Fly past the MAP, and press the **SUSP** Softkey on the PFD.

Or:

Press the Go-Around Button.

TEMPERATURE COMPENSATED ALTITUDE

If desired, the system can compensate the loaded approach altitudes based on a pilot-supplied temperature at the destination. For example, if the pilot enters a destination temperature of -40° C, the system increases the approach altitudes accordingly. A temperature compensated altitude is displayed with a snowflake icon next to it.



NOTE: Activating/cancelling temperature compensation for the loaded approach altitudes does not select/deselect temperature compensated minimums (MDA/DH), nor does selecting/deselecting temperature compensated minimums activate/cancel temperature compensated approach altitudes.



NOTE: The use of temperature compensated altitudes outside the final approach segment shall be coordinated with ATC.

Activating temperature compensated altitude:

- 1) From the 'FPL – Active Flight Plan' Page, press the **MENU** Key. The 'Page Menu' is displayed.
- 2) Turn the **FMS** Knob to highlight 'Temperature Compensation'.
- 3) Press the **ENT** Key. The 'Temperature Compensation' Window is displayed.
- 4) Use the small **FMS** Knob to select the temperature at the <airport>. The compensated altitude is computed as the temperature is selected.



NOTE: The temperature at the destination can be entered in the Temperature Compensation Window on the MFD, or in the 'References' Window on the PFD. There is only one compensation temperature for the system, therefore, changing the temperature will affect both the loaded approach altitudes and the minimums. Refer to the Flight Instruments section for information about applying temperature compensation to the MDA/DH.

- 5) Press the **ENT** Key. 'Activate Compensation?' is highlighted.
- 6) Press the **ENT** Key. The compensated altitudes for the approach are shown in the flight plan.

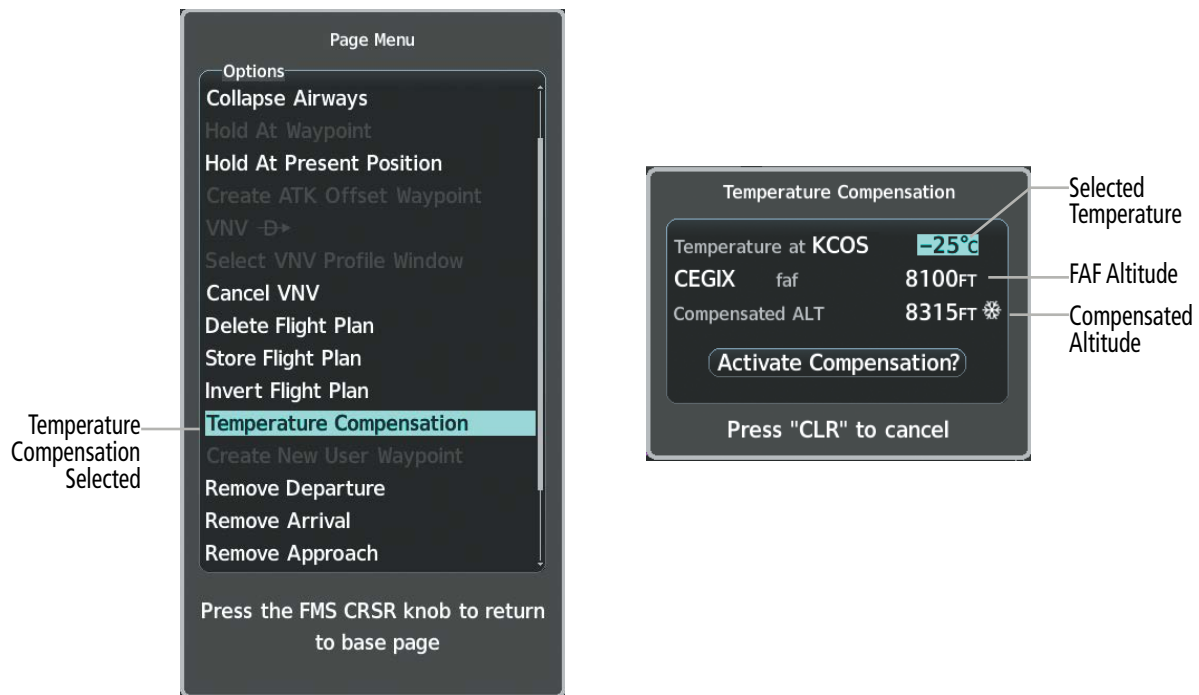


Figure 5-68 Temperature Compensation



Figure 5-69 Temperature Compensation in the Active Flight Plan

Cancelling temperature compensated altitude:

- 1) From the 'FPL – Active Flight Plan' Page, press the **MENU** Key. The 'Page Menu' is displayed.
- 2) Turn the **FMS** Knob to highlight 'Temperature Compensation'.
- 3) Press the **ENT** Key. The 'Temperature Compensation' Window is displayed.
- 4) Press the **ENT** Key. 'Cancel Compensation?' is highlighted.
- 5) Press the **ENT** Key. The temperature compensated altitude at the FAF is cancelled.

5.9 TRIP PLANNING

The system allows the pilot to view trip planning information, fuel information, and other information for a specified flight plan or flight plan leg based on automatic data, or based on manually entered data. Weight planning is also available, based on manually entered fuel data and the active flight plan (to estimate remaining fuel).

TRIP PLANNING

All of the input of data needed for calculation and viewing of the statistics is done on the Trip Planning Page located in the Aux Page Group.

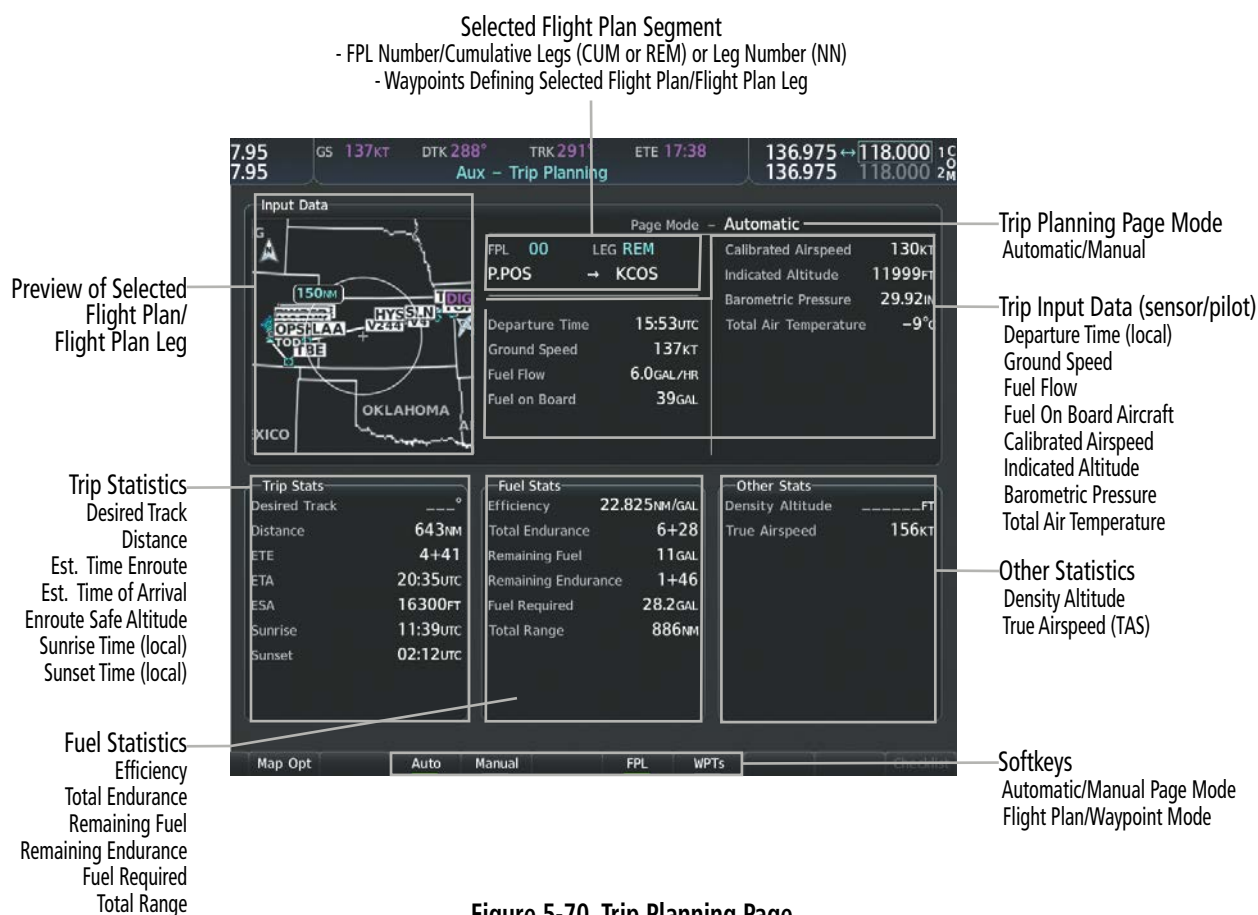


Figure 5-70 Trip Planning Page

The trip planning inputs are based on sensor inputs (automatic page mode) or on pilot inputs (manual page mode). Some additional explanation of the sources for some of the inputs is as follows:

- Departure Time - This defaults to the current time in automatic page mode. The computations are from the aircraft present position, so the aircraft is always just departing.
- Calibrated Airspeed - The primary source is from the air data system, and the secondary source of information is GPS ground speed.
- Indicated Altitude - The primary source is the barometric altitude, and the secondary source of information is GPS altitude.

TRIP STATISTICS

The trip statistics are calculated based on the selected starting and ending waypoints and the trip planning inputs, derived from the flight plan. The system calculates these values depending on the specified mode - flight plan mode (**FPL** Softkey enabled) or waypoint mode (**WPTs** Softkey enabled). Stored Flight Plans may be used by selecting its corresponding number from the Flight Plan Catalog (01–99). '00' is the default number for the active flight plan.

In flight plan mode, with a stored flight plan selected, and the entire flight plan ('CUM') selected, the waypoints are the starting and ending waypoints of the selected flight plan.

In flight plan mode, with a stored flight plan selected, and the desired leg selected (flight plan legs are numbered in increasing order starting from '01'), the waypoints are the endpoints of the selected leg.

In flight plan mode, with the active flight plan selected, and the remaining flight plan (REM) selected, the 'from' waypoint is the present position of the aircraft and the 'to' waypoint is the endpoint of the active flight plan.

In flight plan mode, with the active flight plan selected, and a specific leg selected, the 'from' waypoint is the current aircraft position and the 'to' waypoint is the endpoint of the selected leg.

In waypoint mode, these are manually selected waypoints (if there is an active flight plan, these default to the endpoints of the active leg).

Some of the calculated trip statistics are dashed when the selected leg of the active flight plan has already been flown.

- » Desired Track - Desired Track is shown as nnn° and is the desired track between the selected waypoints. It is dashed unless only a single leg is selected.
- » Distance - The distance is shown in tenths of units up to 99.9, and in whole units up to 9999.
- » Estimated time enroute (ETE) - ETE is shown as hours:minutes until less than an hour, then it is shown as minutes:seconds.
- » Estimated time of arrival (ETA) - ETA is shown as hours:minutes and is the local time at the destination.
 - If in waypoint mode then the ETA is the ETE added to the departure time.
 - If a flight plan other than the active flight plan is selected it shows the ETA by adding to the departure time all of the ETEs of the legs up to and including the selected leg. If the entire flight plan is selected, then the ETA is calculated as if the last leg of the flight plan was selected.
 - If the active flight plan is selected, the ETA reflects the current position of the aircraft and the current leg being flown. The ETA is calculated by adding to the current time the ETEs of the current leg up to and including the selected leg. If the entire flight plan is selected, then the ETA is calculated as if the last leg of the flight plan was selected.
- Enroute safe altitude (ESA) - The ESA is shown as nnnnnFT
- Destination sunrise and sunset times - These times are shown as hours:minutes of the time at the destination.

FUEL STATISTICS

The fuel statistics are calculated based on the selected starting and ending waypoints and the trip planning inputs. Some of the calculated trip statistics are dashed when the selected leg of the active flight plan has already been flown.

- » Fuel efficiency (Efficiency) - This value is calculated by dividing the current ground speed by the current fuel flow.
- » Time of fuel endurance (Total Endurance) - This time is shown as hours:minutes. This value is obtained by dividing the amount of fuel on board by the current fuel flow.
- » Fuel on board upon reaching end of selected leg (Remaining Fuel) - This value is calculated by taking the amount of fuel onboard and subtracting the fuel required to reach the end of the selected leg.
- » Fuel endurance remaining at end of selected leg (Remaining Endurance) - This value is calculated by taking the time of fuel endurance and subtracting the estimated time enroute to the end of the selected leg.
- » Fuel required for trip (Fuel Required) - This value is calculated by multiplying the time to go by the fuel flow.
- » Total range at entered fuel flow (Total Range) - This value is calculated by multiplying the time of fuel endurance by the ground speed.

OTHER STATISTICS

These statistics are calculated based on the system sensor inputs or the manual trip planning inputs.

- » Density Altitude
- » True Airspeed

The pilot may select Automatic or Manual page mode, and flight plan (FPL) or waypoint (WPTs) mode. In automatic page mode, only the FPL, LEG, or waypoint IDs are editable (based on FPL/WPTs selection).

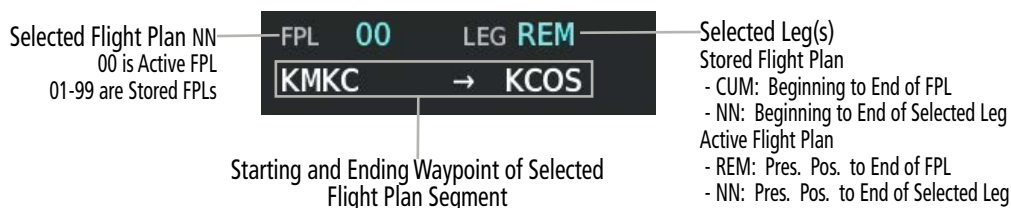


Figure 5-71 Trip Planning Page - Flight Plan Mode



Figure 5-72 Trip Planning Page - Waypoint Mode

Selecting automatic or manual page mode:

From the 'Aux – Trip Planning' Page, press the **Auto** Softkey or the **Manual** Softkey; or press the **MENU** Key, highlight 'Auto Mode' or 'Manual Mode', and press the **ENT** Key.

Selecting flight plan or waypoint mode:

From the 'Aux – Trip Planning' Page, press the **FPL** Softkey or the **WPTs** Softkey; or press the **MENU** Key, highlight 'Flight Plan Mode' or 'Waypoints Mode', and press the **ENT** Key.

Selecting a flight plan and leg for trip statistics:

- 1) From the 'Aux – Trip Planning' Page, press the **FMS** Knob to activate the cursor in the 'FPL' Field.
- 2) Turn the small **FMS** Knob to select the desired flight plan number.
- 3) Turn the large **FMS** Knob to highlight 'CUM' or 'REM'. The statistics for each leg can be viewed by turning the small **FMS** Knob to select the desired leg. The Trip Planning Map also displays the selected data.

Selecting waypoints for waypoint mode:

- 1) From the 'Aux – Trip Planning' Page, press the **WPTs** Softkey; or press the **MENU** Key, highlight 'Waypoints Mode', and press the **ENT** Key. The cursor is positioned in the waypoint field directly below the FPL Field.
- 2) Turn the **FMS** knobs to select the desired waypoint (or select from the Page Menu 'Set WPT to Present Position' if that is what is desired), and press the **ENT** Key. The cursor moves to the second waypoint field.
- 3) Turn the **FMS** knobs to select the desired waypoint, and press the **ENT** Key. The statistics for the selected leg are displayed.

Entering manual data for trip statistics calculations:

- 1) From the 'Aux – Trip Planning' Page, press the **Manual** Softkey or select 'Manual Mode' from the Page Menu, and press the **ENT** Key. The cursor may now be positioned in any field in the top right two boxes.
- 2) Turn the **FMS** Knobs to move the cursor onto the 'Departure Time' Field and enter the desired value. Press the **ENT** Key. The statistics are calculated using the new value and the cursor moves to the next entry field. Repeat until all desired values have been entered.

5.10 ABNORMAL OPERATION

DEAD RECKONING

This section discusses the Dead Reckoning mode of operation and the subsequent indications.



NOTE: *Dead Reckoning Mode only functions in Enroute (ENR) or Oceanic (OCN) phase of flight. In all other phases, an invalid GPS solution produces a “NO GPS POSITION” annunciation on the map and the system stops using GPS.*

While in Enroute or Oceanic phase of flight, if the system detects an invalid GPS solution or is unable to calculate a GPS position, the system automatically reverts to Dead Reckoning (DR) Mode. In DR Mode, the system uses its last-known position combined with continuously updated airspeed and heading data (when available) to calculate and display the aircraft's current estimated position.

It is important to note that estimated navigation data supplied by the system in DR Mode may become increasingly unreliable and must not be used as a sole means of navigation. If while in DR Mode airspeed and/or heading data is also lost or not available, the DR function may not be capable of accurately tracking estimated position and, consequently, the system may display a path that is different than the actual movement of the aircraft. Estimated position information displayed by the system through DR while there is no heading and/or airspeed data available should not be used for navigation.

DR Mode is inherently less accurate than the standard GPS/SBAS Mode due to the lack of satellite measurements needed to determine a position. Changes in wind speed and/or wind direction compound the relative inaccuracy of DR Mode. Because of this degraded accuracy, other navigation equipment must be relied upon for position awareness until GPS-derived position data is restored.

DR Mode is indicated on the system by the appearance of the letters ‘DR’ superimposed in amber over the ‘own aircraft’ symbol on the MFD. In addition, ‘DR’ is prominently displayed in amber on the HSI slightly below and to the left of the aircraft symbol on the HSI. The CDI deviation bar is removed from the display in DR Mode. The autopilot will remain coupled in DR mode as long as the deviation info is available. Lastly, but at the same time, a ‘GPS NAV LOST’ alert message appears on the PFD. Normal navigation using GPS/SBAS source data resumes automatically once a valid GPS solution is restored.

As a result of operating in DR Mode, all GPS-derived data is computed based upon an estimated position and is displayed as amber text on the display to denote degraded navigation source information as shown in the following figure. If the VSD Inset is selected on the MFD, ‘VSD Not Available’ will be displayed.

While the system is in DR Mode, some terrain functions are not available. Additionally, the accuracy of all nearest information (airports, airspaces, and waypoints) is questionable. Finally, airspace alerts continue to function, but with degraded accuracy.

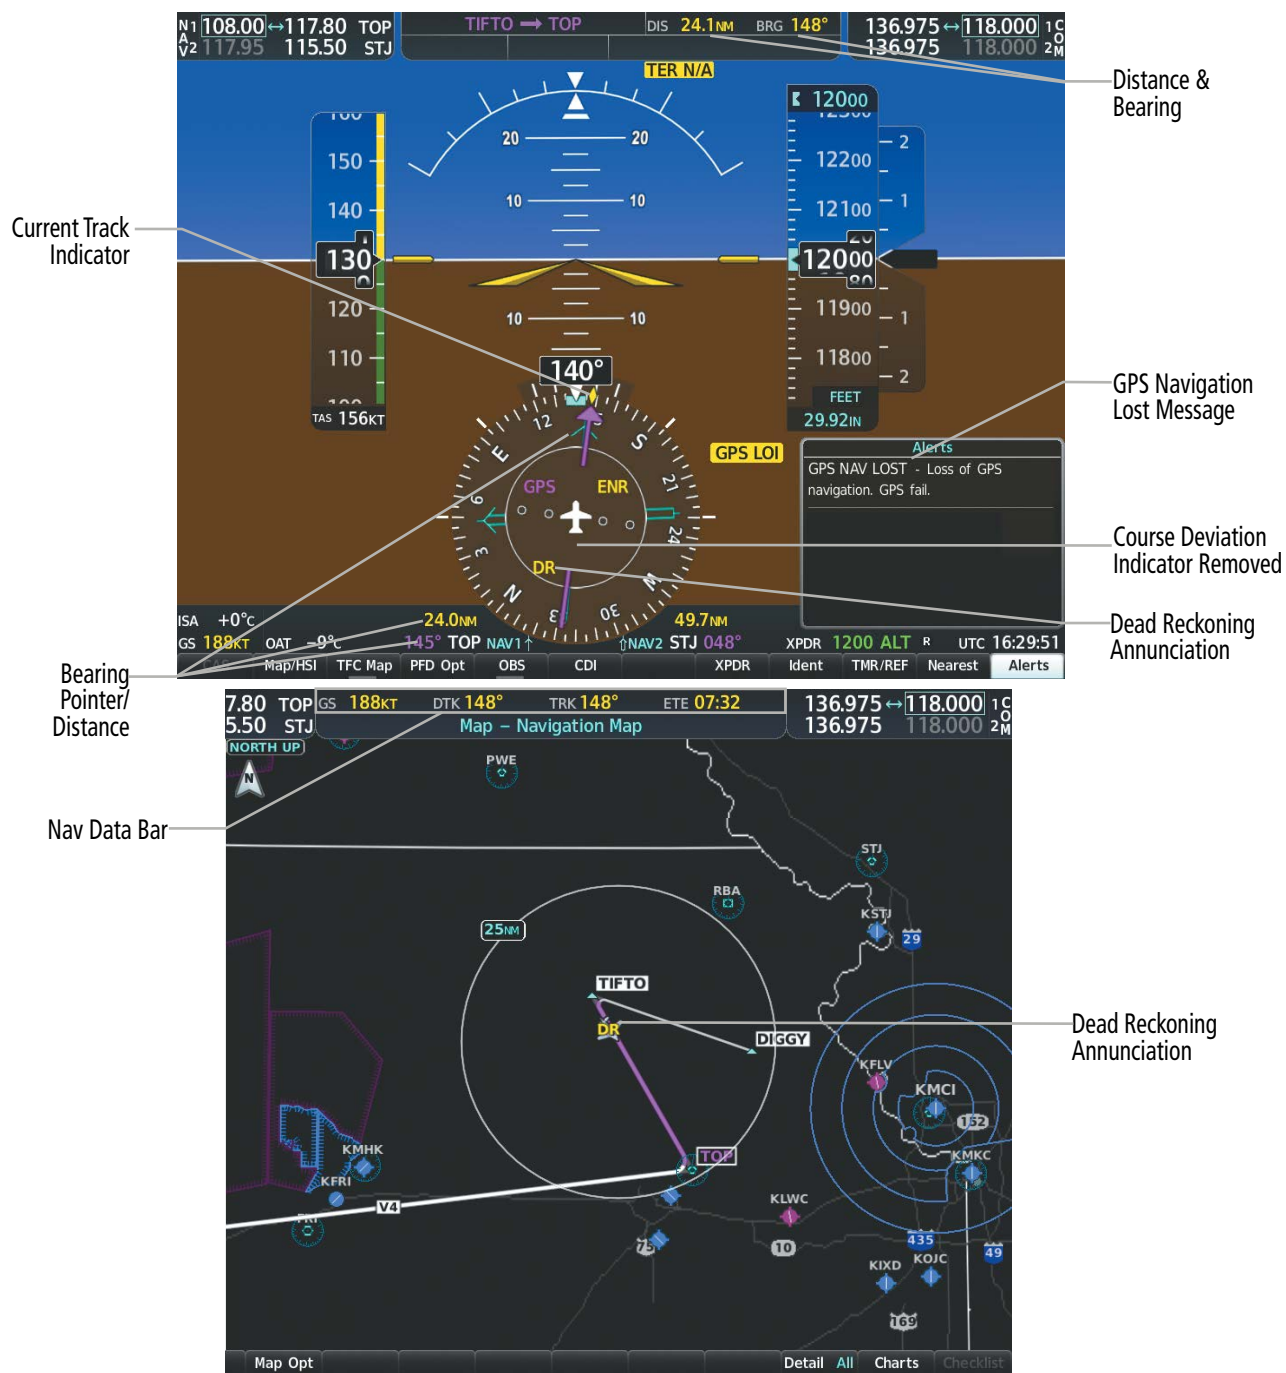


Figure 5-73 Dead Reckoning Mode - GPS Derived Data Shown in Amber

SYSTEM OVERVIEW
FLIGHT INSTRUMENTS
EIS
AUDIO & CNS
FLIGHT MANAGEMENT
HAZARD AVOIDANCE
AFCS
ADDITIONAL FEATURES
APPENDICES
INDEX

Blank Page

SECTION 6 HAZARD AVOIDANCE

Hazard avoidance features available for the system are designed to aid situational awareness and provide advisory information with regard to potential hazards to flight safety associated with weather, terrain, and air traffic.

- **Weather**

- GDL 69/69A SXM SiriusXM Weather (Subscription Optional)
- GSR 56 Garmin Connex Weather (Optional)
- Flight Information Services-Broadcast (Optional)
- L-3 Stormscope[®] WX-500 Lightning Detection System (Optional)

- **Terrain Avoidance**

- Terrain Proximity
- Terrain-SVT (included with Garmin SVT option)

- **Traffic**

- Traffic Information Service (TIS)
- Avidyne TAS600[®] Series Traffic Advisory System (TAS) (Optional)
- Automatic Dependent Surveillance-Broadcast (ADS-B) Traffic (Optional)

6.1 DATA LINK WEATHER



WARNING: Do not use data link weather information for maneuvering in, near, or around areas of hazardous weather. Information contained within data link weather products may not accurately depict current weather conditions.



WARNING: Do not use the indicated data link weather product age to determine the age of the weather information shown by the data link weather product. Due to time delays inherent in gathering and processing weather data for data link transmission, the weather information shown by the data link weather product may be older than the indicated weather product age.

The Data Link Weather feature enables the system to receive weather information from a variety of weather sources, depending on the equipment installed in the aircraft. These sources may include SiriusXM Weather, Garmin Connex Weather, and Flight Information Services-Broadcast (FIS-B). For each source, a ground-based system processes the weather information collected from a network of sensors and weather data providers.

The SiriusXM Weather service, available with the Garmin 69A SXM data link receiver and an active service subscription, updates its weather data periodically and automatically, and transmits this information to the aircraft's receiver via satellite on the S-Band frequency. This service provides continuous reception capabilities at any altitude throughout North America.

The FIS-B Weather service, available when equipped with a capable transponder or data link receiver which can receive 978 MHz Universal Access Transceiver (UAT) data, delivers subscription-free weather information periodically and automatically to the aircraft. FIS-B uses a network of FAA-operated Ground-Based Transceivers (GBTs) to transmit the information to the aircraft's receiver. Reception is limited to line-of-sight, and is available below 24,000 feet MSL in the United States. FIS-B broadcasts provide weather data in a repeating cycle which may take approximately ten minutes to transmit all available weather data. Therefore, not all weather data may be present immediately upon initial FIS-B signal acquisition. FIS-B is a component of the Automatic Dependent Surveillance (ADS-B) system, which offers both weather and traffic data; refer to the ADS-B Traffic discussion later in this section for a more detailed discussion of the ADS-B system and its capabilities.

The Garmin Connex Weather service, available when equipped with the Garmin GSR 56 Iridium Satellite Transceiver and an active service subscription, provides data link weather information to the aircraft after the pilot defines a geographic area and subsequently selects a manual or automatically recurring Connex Data Request. The transceiver then contacts the Garmin Connex Weather service using the Iridium Satellite telephone system and retrieves the weather data for the specified area. The Garmin Connex Weather service offers worldwide weather coverage, but the availability of individual weather products, such as radar precipitation, varies by region.



NOTE: To check the availability of Garmin Connex weather products offered in a particular region, visit flygarmin.com

ACTIVATING DATA LINK WEATHER SERVICES



NOTE: Service activation is not applicable to the FIS-B Weather service.

ACTIVATING THE SIRIUSXM WEATHER SERVICE

Before SiriusXM Weather can be used, the service must be enabled by providing SiriusXM's customer service the coded ID(s) unique to the installed data link receiver. The Data Radio ID must be provided to activate the weather service. A separate Audio Radio ID, if present, enables the receiver to provide SiriusXM Radio entertainment. To view this information, refer to the following locations:

- » The Aux - XM Information Page on the MFD
- » The SiriusXM Activation Instructions included with the Data Link Receiver
- » The label on the back of the Data Link Receiver

SiriusXM uses the coded IDs to send an activation signal that allows the system to display weather data and/or provide audio entertainment programming through the data link receiver.

Establishing an account for SiriusXM services:

- 1) Select the XM Radio Page in the Aux Page Group.
- 2) If necessary, press the **Info** Softkey to display the 'Aux - XM Information' Page.
- 3) Note the Data Radio ID (for SiriusXM Weather data) and/or the Audio Radio ID (for SiriusXM Satellite Radio).
- 4) Contact SiriusXM customer service through the phone number listed on its website, www.siriusxm.com.
- 5) Provide SiriusXM customer service the Data Radio ID and/or Audio Radio ID, in addition to payment information, and the desired weather product subscription package.

After SiriusXM has been contacted, it may take approximately 15 minutes until the activation occurs.

Verifying the SiriusXM Weather service activation:

- 1) Once a SiriusXM Weather account has been established, select the XM Radio Page in the Auxiliary Page Group.
- 2) If necessary, press the **Info** Softkey to display the 'Aux - XM Information' Page.
- 3) View the list of supported Weather Products. An empty box appears next to an unavailable weather product; a green filled box appears next to an available weather product. During activation, it may take several minutes for weather products in the selected subscription package to become available.



NOTE: Not all weather products offered by SiriusXM are supported for display on this system. This pilot's guide only discusses supported weather products.



Figure 6-1 XM Information Page

ACTIVATING GARMIN CONNEXT WEATHER

The Garmin Connex weather service requires an active Iridium satellite telephone and weather data subscription. Registration begins by first obtaining the serial number(s) for the installed Iridium Satellite Transceiver (GSR 1), and the System ID. Then go to the website flygarmin.com and follow the instructions for establishing an account for Garmin Connex data services. Note additional information about the airframe may be required. After an account has been established, Garmin provides an access code that must be entered on the system and successfully transmitted to the Garmin Connex service via the Iridium satellite network.

Obtaining the LRU serial numbers and System ID:

- 1) Select the 'Aux - System Status' Page.
- 2) Press the **LRU** Softkey.
- 3) Turn the **FMS** Knob to scroll the cursor until 'GSR 1' is visible in the 'LRU Information' window.
- 4) Note the serial number displayed for 'GSR 1'.
- 5) Push the **FMS** Knob to deactivate the cursor.

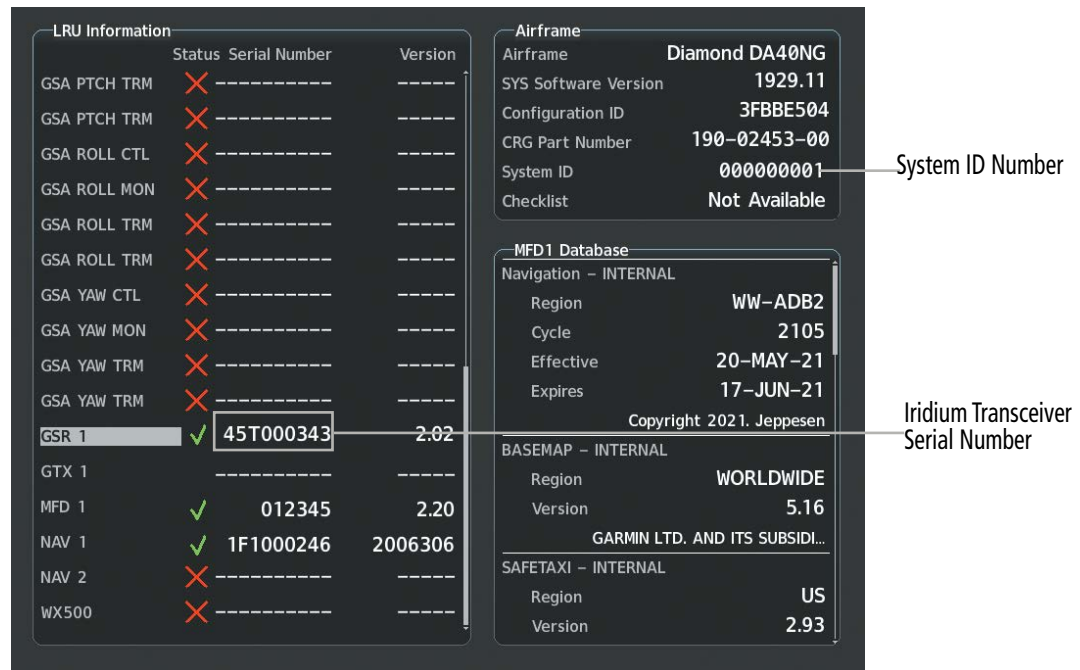


Figure 6-2 Identification Needed for Iridium Registration

When an account is established, Garmin provides an Access Code which must be entered on the system in order to complete the registration process.

Registering the system to receive Garmin Connex Weather:

- 1) Go to flygarmin.com. Locate the information for subscribing to Garmin Connex Satellite Services on the website.
- 2) Choose a desired service which includes weather data and enter the requested information about the aircraft.
- 3) Note the Access Code provided during the registration process and any additional instructions received.
- 4) With the aircraft outside and having a clear view of the sky, turn the large **FMS** Knob on the MFD to select the Map page group.
- 5) Turn the small **FMS** Knob to select the 'Map - Weather Data Link (CNXT)' Page. If another data link weather source such as 'XM' or 'FIS-B' is displayed in the page title, it will be necessary to change the data link weather source to CNXT before continuing. Refer to 'Viewing the Weather Data Link (CNXT) Page' procedure to change the data link source to prior to registration.
- 6) If the system displays the Connex Registration Window, proceed to step 8. Otherwise, press the **MENU** Key. The page menu window is now displayed.
- 7) Turn the large **FMS** Knob to select 'Register With Connex' in the menu list.
- 8) Press the **ENT** Key. The Connex Registration Window appears as shown in the following figure.



Figure 6-3 Enter Access Code

- 6) Enter the access code provided by Garmin in the 'Access Code' field.
- 7) Press the **ENT** Key. 'Register' is highlighted as in the previous Figure.
- 8) Press the **ENT** Key. The system contacts Garmin through the Iridium network. System registration is complete when the Current Registration Window displays the correct information for the Airframe, Tail Number, Airframe Serial Number, and Iridium Serial Number.
- 9) When finished, push the **FMS** Knob to remove the Connex Registration Window.

WEATHER PRODUCT AGE

Unlike real-time weather information collected directly from weather sensors on-board an aircraft, such as an airborne weather radar or a lightning detection system, data link weather in contrast relies on external service providers to collect, process, and transmit weather information to the aircraft. This information can come from a variety of sources such as government agencies.



NOTE: Due to the time it takes to collect, process, and distribute data link weather information, it is imperative for pilots to understand that data link weather information is not real-time information and may not accurately depict current conditions.

For each data link weather product which can be displayed as a map overlay, such as radar precipitation, the system can also show a weather product age. This age represents the elapsed time, in minutes, since the weather service provider compiled the weather product and the current time. It does not represent the age of the information contained within the weather product itself. For example, a single mosaic of radar precipitation is comprised data from multiple radar sites providing data at differing scan rates or intervals. The weather service provider periodically compiles this data to create a single composite image, and assigns one time to this image which becomes the basis of the product age. The service provider then makes this weather product available for data link transmission at the next scheduled update time. The actual age of the weather data contained within the mosaic is therefore older than its weather product age and should never be considered current.

SiriusXM and FIS-B weather products are broadcast automatically on a repeating cycle without pilot intervention. For the Garmin Connex service, the pilot schedules a one-time or repeating data request at regular intervals.

Each data link weather product age has an expiration time. The weather product age is shown in white if it is less than half of this expiration time, otherwise it is shown in amber until reaching its expiration time. After a weather product has expired, the system removes the expired weather product from the displays, and shows white dashes instead of the age. If the data link receiver has not yet received a weather product 'N/A' appears instead of the age to show the product is currently not available for display. This may occur, for example, after powering on the system but before the data link receiver has received a complete weather data transmission. It could also indicate a possible outage of a weather product.

The weather product age is shown automatically for weather products displayed on MFD maps. For PFD maps, the pilot can manually enable/disable the age information.

Enabling/disabling the weather product age for PFD Maps:

- 1) With the PFD Inset Map or HSI Map displayed, press the **Map/HSI** Softkey.
- 2) Press the **WX LGND** to show/remove the weather product age information for PFD maps.

Tables 6-1 and 6-2 show the weather product symbols, the and expiration times for SiriusXM Weather and FIS-B Weather, respectively. The FIS-B broadcast rate represents the interval at which the FIS-B Weather service transmits new signals that may or may not contain updated weather product information. It does not represent the rate at which the weather information is updated or when the Data Link Receiver receives new data. The service provider and its weather data suppliers define and control the data update intervals, which are subject to change.

SiriusXM Weather Product	Symbol	Expiration Time (Minutes)
NEXRAD		30
Cloud Top (CLD TOP)		60
Echo Top (ECHO TOP)		30
SiriusXM Lightning (LTNG)		30
Cell Movement		30
SIGMETs/AIRMETs		60
METARs		90
City Forecast		90
Surface Analysis		60
Freezing Levels		120
Winds Aloft		90
County Warnings		60
Cyclone Warnings		60
Icing Potential (CIP and SLD)		90
Pilot Weather Report (PIREP)		90
Air Report(AIREP)		90
Turbulence		180
Radar Coverage Not Available	No product image	30
Temporary Flight Restriction (TFR)	No product image	60
Terminal Aerodrome Forecast (TAF)	No product image	60

Table 6-1 SiriusXM Weather Product Symbols and Data Timing

FIS-B Weather Product	Symbol	Expiration Time (Minutes)	Broadcast Rate (Minutes)
NEXRAD Composite (US)		30	15
NEXRAD Composite (Regional)		30	2.5
METARs		90	5
Pilot Weather Report (PIREP)		90	10
Winds Aloft		90	10
SIGMETs/AIRMETs		60	5
No Radar Coverage	no product image	30	2.5
Terminal Aerodrome Forecast (TAF)	no product image	60	10
Temporary Flight Restriction (TFR)	no product image		10

Table 6-2 FIS-B Weather Product Symbols and Data Timing

The following table shows the Garmin Connex Weather product symbols, the expiration times and the refresh rates. The refresh rate represents the interval at which Garmin Connex weather service makes available the most current known weather data. It does not necessarily represent the rate at which the service receives new data from various weather sources. The pilot chooses how often to contact the Garmin Connex weather service in order to retrieve weather data through the Connex Data Request.

Garmin Connex Weather Product	Symbol	Expiration Time (Minutes)	Refresh Rate (Minutes)
Radar Precipitation		30	U.S.: 3 ¹ Canada: 3 ^{1,2} Europe: 15 Australia: 15 ³
Infrared Satellite		60	30
Datalink Lightning		30	Continuous
SIGMETs/AIRMETs		60	Continuous
METARs		90	Continuous

Table 6-3 Garmin Connxt Weather Product Symbols and Data Timing

Figure 6-4 Weather Data Link (XM) Page

Viewing the Weather Data Link Page and changing the data link weather source, if applicable:

- 1) Turn the large **FMS** Knob to select the Map Page Group.
- 2) Turn the small **FMS** Knob to select the Weather Data Link (XM or CNXT or FIS-B) Page. The currently selected data link weather source appears in the page title.
- 3) If the page title does not contain the desired weather source, press the **MENU** Key.
 - a) Turn the **FMS** Knob to highlight 'Display XM Weather', 'Display Connex Weather' or 'Display FIS-B Weather' (choices may vary depending on the installed equipment).
 - b) Press the **ENT** Key.




Figure 6-5 Changing the Data Link Weather Source

The system presents the softkeys for the selected source on the Weather Data Link Page, and for map overlays used throughout the system. The following figures show the softkeys for the Weather Data Link Page based on the selected source.

WEATHER DATA LINK (XM) PAGE SOFTKEYS



NOTE: Only softkeys pertaining to data link weather features are shown in the following tables.

Level 1	Level 2	Level 3	Description
NEXRAD			Enables/disables the NEXRAD weather product overlay.
Echo Top			Enables/disables the Echo Tops weather product overlay.
CLD Top			Enables/disables the Cloud Tops weather product overlay.
XM LTNG			Enables/disables the SiriusXM Lightning weather product overlay.
Cell MOV			Enables/disables the Cell Movement weather product overlay.
SIG/AIR			Enables/disables the SIGMET/AIRMET weather product overlay.
METAR			Enables/disables the graphical METAR weather product overlay.

Level 1	Level 2	Level 3	Description
Legend			Enables/disables the SiriusXM Weather Legends Window. Softkey available for selection when at least one SiriusXM Weather product is enabled.
More WX			Displays second-level SiriusXM Weather product softkeys.
	Cyclone		Enables/disables the Cyclone weather product overlay.
	SFC		Displays third level softkey for enabling/disabling the Surface Analysis and City Forecast weather product and selecting a forecast period.
		Off	Disables the Surface Analysis and City Forecast weather product overlay.
		Current	Displays the Surface Analysis for the current time period overlay.
		12 HR, 24 HR, 36 HR, 48 HR	These softkeys display a Surface Analysis and City Forecast overlay for the selected future time period.
		Legend	Enables/disables the SiriusXM Weather Legends Window. Softkey available for selection when at least one SiriusXM Weather product is enabled.
		Back	Returns to the second-level softkeys.
	FRZ LVL		Enables/disables the Freezing Level weather product overlay.
	Wind		Displays third level softkeys for enabling/disabling the Winds Aloft weather product and selecting a winds aloft altitude.
		PREV	Shows the previous level of winds aloft altitude softkeys.
		Off	Disables the Winds Aloft weather product overlay.
		Softkeys available for selecting winds from the Surface to 42,000 feet	Enables/disables the Winds Aloft weather product for the surface (SFC) through 15,000 feet. Softkeys available for 3,000 foot increments of altitude.
		Next	Shows the next level of winds aloft altitude softkeys.
		Legend	Enables/disables the SiriusXM Weather Legends Window. Softkey available for selection when at least one SiriusXM Weather product is enabled.
		Back	Returns to the second-level softkeys.
	ICNG		Displays altitude softkeys for the Icing weather product overlay.
		PREV	Shows the previous level of Icing altitude softkeys.
		Off	Disables the Icing weather product.
		Softkeys available for selecting winds from the Icing altitude from to 1,000 to 30,000 feet	Enables/disables the Icing weather product overlay from 1,000 feet to 30,000 feet. Softkeys available for 3,000 foot increments of altitude.
		Next	Shows the next level of Icing weather product softkeys.

Level 1	Level 2	Level 3	Description
		Legend	Enables/disables the SiriusXM Weather Legends Window. Softkey available for selection when at least one SiriusXM Weather product is enabled.
	TURB		Displays softkeys for enabling/disabling the Turbulence weather product overlay.
		PREV	Shows the previous level of Turbulence altitude softkeys.
		Off	Disables the Turbulence weather product overlay.
		Softkeys available for selecting Turbulence altitude from 21,000 feet to 45,000 feet	Enables/disables the Icing weather product overlay from 21,000 feet to 45,000 feet. Softkeys available for 3,000 foot increments of altitude.
		Next	Shows the next level of Icing weather product softkeys.
		Legend	Enables/disables the SiriusXM Weather Legends Window. Softkey available for selection when at least one SiriusXM Weather product is enabled.
		Back	Returns to the second-level softkeys.
	AIREPS		Enables/disables the AIREPs weather product overlay.
	PIREPS		Enables/disables the PIREPs weather product overlay.
	County		Enables/disables the County Warnings weather product overlay.
	Back		Returns to the first level softkeys.

WEATHER DATA LINK (CNXT) PAGE SOFTKEYS

Level 1	Level 2	Level 3	Description
PRECIP			Enables/disables the Precipitation weather product overlay.
IR SAT			Enables/disables the Infrared Satellite weather product overlay.
SIG/AIR			Enables/disables the SIGMET/AIRMET weather product overlay.
METAR			Enables/disables the METAR weather product overlay.
Legend			Enables/disables the Connex Weather Legends Window. Softkey available for selection when at least one Connex Weather product is enabled.
More WX			Displays second-level Connex Weather product softkeys.
	Wind		Displays third level softkeys for enabling/disabling the Winds Aloft weather product and selecting a winds aloft altitude.
		PREV	Shows the previous level of winds aloft altitude softkeys.
		Off	Disables the Winds Aloft weather product overlay.
		Softkeys available for selecting winds from the Surface to 42,000 feet	Enables/disables the Winds Aloft weather product for the surface (SFC) through 15,000 feet. Softkeys available for 3,000 foot increments of altitude.
		Next	Shows the next level of winds aloft altitude softkeys.

Level 1	Level 2	Level 3	Description
		Legend	Enables/disables the Connex Weather Legends Window. Softkey available for selection when at least one Connex Weather product is enabled.
		Back	Returns to the second-level softkeys.
	PIREPs		Enables/disables the PIREPs weather product overlay.
	Back		Returns to the first level softkeys.

WEATHER DATA LINK (FIS-B) PAGE SOFTKEYS)

Level 1	Level 2	Level 3	Description
NEXRAD or US or RGNL or US/RGNL			Cycles through NEXRAD display modes with each press: NEXRAD (with annunciator disabled): No NEXRAD is shown. US: Displays NEXRAD data for the Continental US (CONUS). RGNL: Displays regional NEXRAD data. US/RGNL: Displays regional NEXRAD data where available, and CONUS NEXRAD data in other coverage areas.
IR SAT			Enables/disables the Infrared Satellite weather product overlay.
SIG/AIR			Enables/disables the SIGMET/AIRMET weather product overlay.
METAR			Enables/disables the METAR weather product overlay.
Legend			Enables/disables the Connex Weather Legends Window. Softkey available for selection when at least one Connex Weather product is enabled.
More WX			Displays second-level Connex Weather product softkeys.
	Wind		Displays third level softkeys for enabling/disabling the Winds Aloft weather product and selecting a winds aloft altitude.
		PREV	Shows the previous level of winds aloft altitude softkeys.
		Off	Disables the Winds Aloft weather product overlay.
		Softkeys available for selecting winds from the Surface to 42,000 feet	Enables/disables the Winds Aloft weather product for the surface (SFC) through 15,000 feet. Softkeys available for 3,000 foot increments of altitude.
		Next	Shows the next level of winds aloft altitude softkeys.
		Legend	Enables/disables the Connex Weather Legends Window. Softkey available for selection when at least one Connex Weather product is enabled.
		Back	Returns to the second-level softkeys.
	PIREPs		Enables/disables the PIREPs weather product overlay.
	Back		Returns to the first level softkeys.

The Weather Data Link Page can display a legend for each enabled weather product.

Viewing legends for displayed weather products on the Weather Data Link Page:

- 1) Select the Weather Data Link Page.
- 2) Press the **Legend** Softkey to display the legends for the displayed weather products.
Or:
 - a) Press the **MENU** Key.
 - b) Select 'Weather Legend' and press the **ENT** Key.
- 3) Turn the **FMS** Knob to scroll through the legends if more are available than fit in the window.
- 4) To remove the Weather Legends Window, press the **Legend** Softkey, the **ENT** or the **CLR** Key, or push the **FMS** Knob.

Additional information about the following weather products can be displayed by panning the Map Pointer over the following products on the Weather Data Link Page:

- | | |
|-----------------|-------------------|
| - Echo Tops | - County Warnings |
| - Cloud Tops | - TFRs |
| - Cell Movement | - AIREPs |
| - SIGMETs | - PIREPs |
| - AIRMETs | |
| - METARs | |

The map panning feature is enabled by pressing the **Joystick**. The map range is adjusted by turning the **Joystick**. If the map range is adjusted while panning is enabled, the map is re-centered on the Map Pointer.



Certain weather products, such as METARs or TFRs have associated full text. When a weather product is selected with the Map Pointer, press the **ENT** Key. The system displays the full text for the selected weather product in a window. To remove the window, push the **FMS** Knob or the **CLR** Key.

The Weather Data Link Page also has a page menu that can be accessed by pressing the **MENU** Key. It has controls for enabling/disabling the weather products as an alternative to using the softkeys.

CUSTOMIZING THE WEATHER DATA LINK PAGE

The Weather Data Link Page includes controls for selecting the maximum map range to display each weather product on the page. If the pilot increases the map range beyond this selected maximum range, the system removes the weather product from the map. If more than one data link weather source has been installed, the system uses the same maximum map range for the comparable weather product of another source.

Setting up and customizing the Weather Data Link Page:

- 1) Select the Weather Data Link Page.
- 2) Press the **MENU** Key.
- 3) Turn the **FMS** Knob to highlight 'Weather Setup', then press the **ENT** Key.
- 4) Turn the small **FMS** Knob to select 'Product Group 1' or 'Product Group 2', and press the **ENT** Key.
- 5) Turn the large **FMS** Knob or press the **ENT** Key to scroll through product selections.
- 6) Turn the small **FMS** Knob to scroll through options for each product (On/Off, range settings, etc.).
- 7) Press the **ENT** Key to select an option.
- 8) Push the **FMS** Knob or **CLR** Key to return to the Weather Data Link (XM) Page with the changed settings.



NOTE: 'Product Group 2' is only applicable to SiriusXM and Garmin Connex Weather.

Restoring default Weather Data Link Page settings:

- 1) Select the Weather Data Link Page.
- 2) Press the **MENU** Key.
- 3) Turn the **FMS** Knob to highlight 'Weather Setup', then press the **ENT** Key.
- 4) Press the **MENU** Key.
- 5) Highlight the desired default(s) to restore (all or for selection) and press **ENT** Key.
- 6) When finished, push the **FMS** Knob or press the **CLR** Key.

WEATHER PRODUCT MAP OVERLAYS

Other PFD and MFD maps and pages can display a smaller set of data link weather products. The following table shows which data link weather products can be displayed on specific maps, indicated with a '+' symbol.

Data Link Weather Product	PFD Map	Navigation Map Page	Weather Data Link Page	Weather Information Page	Aux - Trip Planning Page	Aux - Video Page	Nearest Page Group	Flight Plan Pages
NEXRAD	+	+	+		+	+	+	+
Cloud Top			+					
Echo Top			+					
Data Link Lightning	+	+	+		+	+	+	+
Cell Movement		+	+		+			
SIGMETs/AIRMETs			+					
METARs	+	+	+	+	+	+	+	+
Surface Analysis & City Forecast			+					
Freezing Levels			+					
Winds Aloft		¹	+					
County Warnings			+					
Cyclone Warnings			+					
Icing Potential			+					
PIREPs			+	+				
AIREPs			+	+				
Turbulence (TURB)			+					
No Radar Coverage	+	+	+		+	+	+	+
TFRs	+	+	+	+	+	+	+	+
TAFs				+				

¹ Winds Aloft data is available inside the VSD when VSD is enabled on the Navigation Map Page.

Table 6-4 Weather Product Display Maps

Displaying Data Link Weather Products on the Navigation Map Page:

- 1) Select the Navigation Map Page.
- 2) Press the **Map Opt** Softkey.
- 3) Press the softkey to enable/disable the desired weather product.

The Navigation Map Page also can display legends for weather products enabled on this map with the **Legend** Softkey. This softkey is subdued if no weather products are enabled.

Showing/removing the weather legend on the Navigation Map Page:

- 1) Select the Navigation Map Page.
- 2) Press the **Map Opt** Softkey.
- 3) Press the **Legend** Softkey to show the weather legends window.
- 4) When finished, press the **Legend** Softkey again, or push the **FMS** Knob or the **CLR** Key to remove the window.

The Navigation Map Page also allows the pilot to select the maximum map range to display weather products. If the pilot increases the map range beyond this selected maximum range, the system removes the weather product from the map. The system uses this setting for all navigation maps, including those displayed on the PFD.

Setting up and customizing weather data for the navigation maps:

- 1) Select the Navigation Map Page.
- 2) Press the **MENU** Key.
- 3) With 'Map Settings' highlighted, press the **ENT** Key.
- 4) Turn the small **FMS** Knob to select the 'Weather' Group and press the **ENT** Key.
- 5) Turn the large **FMS** Knob or press the **ENT** Key to scroll through product selections.
- 6) Turn the small **FMS** Knob to scroll through options for each product (ON/OFF, range settings).
- 7) Press the **ENT** Key to select an option.
- 8) Push the **FMS** Knob or **CLR** Key to return to the Navigation Map Page with the changed settings.

The system can also display data link weather information on the PFD navigation maps.

Displaying Data Link Weather products on the PFD:

NOTE: Data link lightning is not applicable to the FIS-B Weather service.

- 1) On the PFD, press the **Map/HSI** Softkey.
- 2) To enable/disable a data link lightning weather product on a PFD, press the **Lightning** Softkey.
 - a) Press the desired source of lightning or press the **LTNG Off** Softkey.
 - b) Press the **Back** Softkey twice to return to the top-level PFD Softkeys.

On the MFD maps, the weather product icon and age appear automatically when a weather is enabled and the range is within the maximum display limits. On PFD maps, this information is available using the PFD softkeys.

Enabling/disabling the weather product icon and age display (PFD maps):

- 1) On the PFD, press the **Map/HSI** Softkey.
- 2) Press the **WX LGND** Softkey to enable/disable the weather product age, source, and icon box display on PFD Maps.

The setup menus for the Navigation Map Page and the Weather Data Link Page control the map range settings above which weather products data are decluttered from the display. If a map range larger than the weather product map range setting is selected, the weather product data is removed from the map. The page menus also provide an alternative to using the softkeys to enable/disable data link weather product overlays on maps.

CONNEXT DATA REQUESTS



NOTE: Data requests are not applicable to the SiriusXM Weather or FIS-B Weather services.

The Connex Data Request Menu provides the pilot with the options to define the requested weather coverage area(s), choose automatic weather update intervals (if desired), and the ability to send or cancel weather data requests. A Request Status Window inside the menu shows the status of the Connex Data Request.

Before a Connex Data Request can occur, a valid request coverage area must be defined from which all currently available Garmin Connex Weather products will be retrieved. At a minimum, either the aircraft's present position or a waypoint (as part of a flight plan or entered directly in the 'WAYPOINT' coverage field) must be part of the request coverage area, otherwise the request status window indicates 'INVALID COVERAGE AREA' and the system will not allow a request to occur.

It is not necessary for a destination (based on an active flight plan), a flight plan, or waypoint to be specified prior to enabling these coverage areas; however no weather data will be retrieved for these option(s) until a flight plan or waypoint is provided, respectively.

Manually Requesting Garmin Connex Weather information:

- 1) Select the 'Weather Data Link (CNXT)' Page.
- 2) Press the **MENU** Key.
- 3) With 'Connex Data Request' highlighted, press the **ENT** Key.
- 4) Turn the large **FMS** Knob to highlight the desired coverage option(s) and press the **ENT** Key to show or hide a green check mark to select one or more of the following coverage selections:
 - Present Position – Requests data based on current location.
 - Destination – Requests data based on the active flight plan destination (Direct-To destinations excluded). See the Flight Management section for more information about entering and activating flight plans.
 - FPL – Requests data along an active flight plan, if one currently exists. Turn the small **FMS** Knob to select the desired flight plan look-ahead distance option (or choose 'Remaining FPL' to request weather data for the remainder of the flight plan), then press the **ENT** Key.
 - Waypoint – Requests data based on a waypoint (which may be off-route). Turn the large and small **FMS** Knobs to enter a waypoint, then press the **ENT** Key.
- 5) Turn the large **FMS** Knob highlight to the 'Diameter / Route Width' distance field and turn the small **FMS** Knob to select the desired diameter and route width of the request, then press the **ENT** Key.

- 6) Turn the large **FMS** Knob until the 'Send Request' field is highlighted. Press the **ENT** Key to initiate the request immediately or push the **FMS** Knob to return to the Weather Data Link (CNXT) Page without requesting weather data.




Figure 6-7 Weather Data Link (CNXT) Page Menu

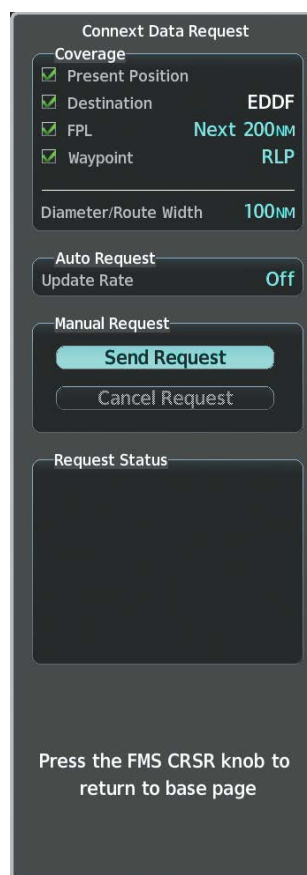


Figure 6-8 Connnext Data Request Window

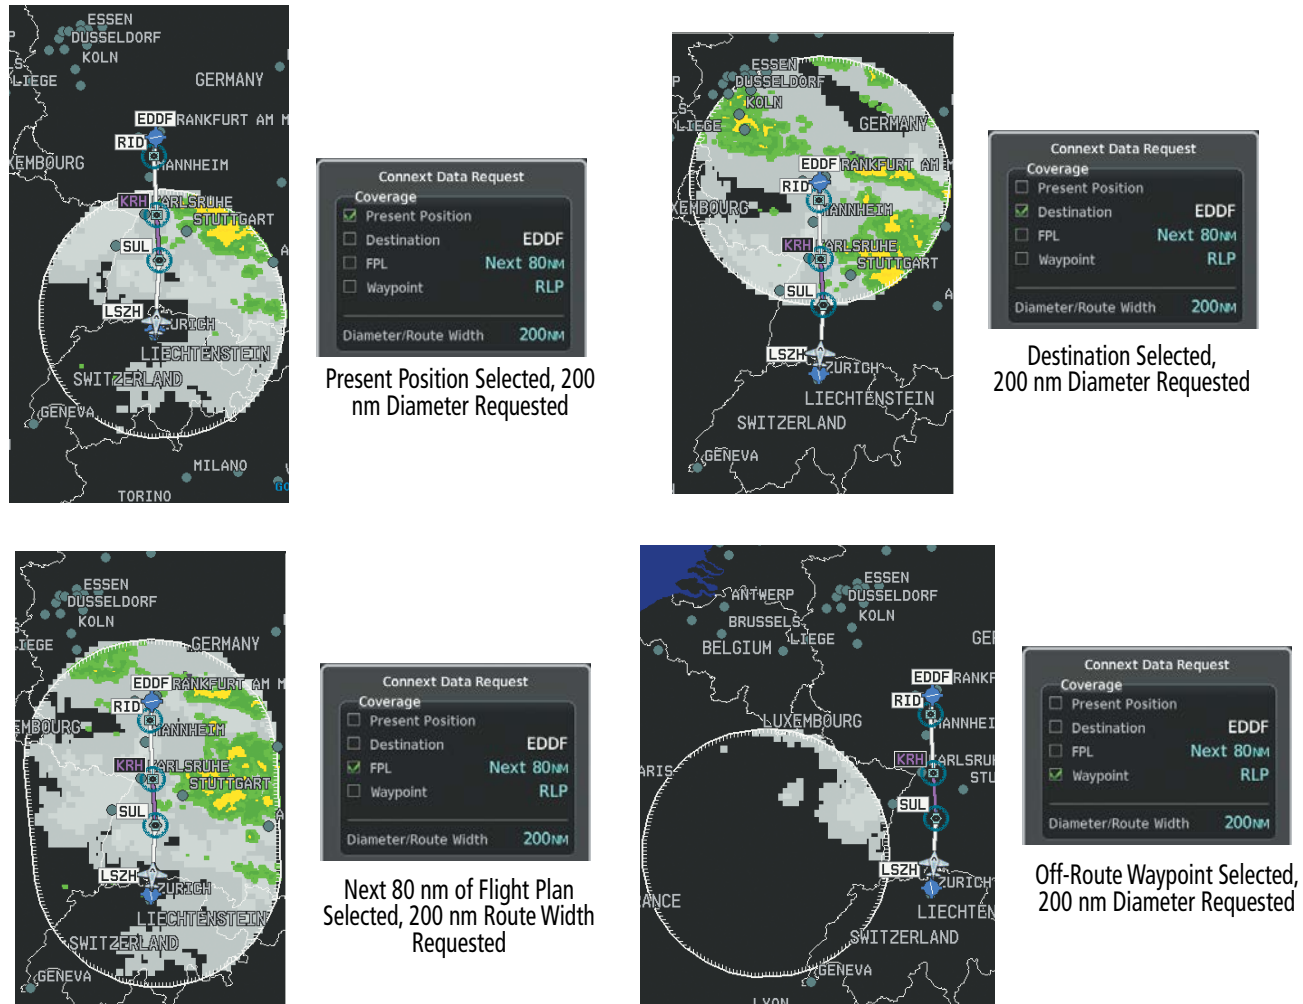


Figure 6-9 Garmin Connex Weather Data Request Results with Precipitation Data Displayed

During a Connex Data Request, the Request Status Window initially displays “Contacting Connex...”. Once a connection is established, the Request Status Window displays “Receiving Wx Data... Time Remaining:” with an estimated data transfer time (either minutes or seconds). If desired, the Connex Data Request Menu may be removed while the data request is processing by pressing the **FMS** Knob; the data request will continue to process in the background. Connex Data Requests typically take between 1 to 4 minutes to complete depending on the size of the selected weather coverage area, the amounts of weather activity present, and the Iridium signal strength.

The system retrieves all available Garmin Connex Weather products within the selected coverage area during an initial Connex Data Request, regardless of which products (if any) are currently enabled for display. On subsequent requests, the system retains previously retrieved textual data (such as METARs and TAFs) if it has not expired, while new textual weather data matching the current coverage area and all graphical weather data is transferred to the aircraft during every data request.

At the completion of a successful weather data request, the Request Status Window indicates ‘OK’ if the Connex Data Request menu is still within view.

Cancelling a Connex Data Request in Progress:

- 1) Select the 'Weather Data Link (CNXT)' Page.
- 2) Press the **MENU** Key.
- 3) With 'Connex Data Request' highlighted, press the **ENT** Key.
- 4) Turn the large **FMS** Knob to select the 'Cancel Request' field and press the **ENT** Key. The request status box indicates 'Request Cancelled'.
- 5) Push the **FMS** Knob to return to the Weather Data Link (CNXT) Page.

The flight crew can schedule Connex Data Requests to recur automatically. Automatic requests remain enabled until the flight crew them, or the system power is removed. The Request Status Window indicates the number of minutes or seconds until the next automatic data request occurs.



NOTE: *If automatic Connex Data Requests were enabled prior to the system entering Reversionary Mode, the automatic weather data requests will continue in Reversionary Mode, however the Connex Data Request Window and its associated options will not be available in Reversionary Mode.*

Enabling/disabling automatic Connex Data Requests:

- 1) Select the 'Weather Data Link (CNXT)' Page.
- 2) Press the **MENU** Key.
- 3) With 'Connex Data Request' highlighted, press the **ENT** Key.
- 4) Choose the desired weather coverage options.
- 5) Turn the large **FMS** Knob to select the 'Update Rate' field. Then turn the small **FMS** Knob to highlight the desired automatic update frequency (Off, 5 Min, 10 Min, 15 Min, 20 Min, 30 Min, 45 Min, or 60 Min), then press the **ENT** Key.
- 6) The 'Send Request' field is highlighted and a countdown timer is displayed in the 'Request Status' Window based on the currently selected update rate. Press the **ENT** Key to immediately send an immediate Connex Data Request.

Or:

Push the **FMS** Knob to return to the Weather Data Link (CNXT) Page.

WEATHER PRODUCT OVERVIEW

The following is an overview of data link weather products the system can display.

NEXRAD (SIRIUSXM)

NOTE: *Datalink weather radar information cannot be displayed at the same time as relative terrain, echo tops, icing, or turbulence data.*

The National Weather Service (NWS) operates the WSR-88D, or NEXRAD (NEXt-generation RADar) system, an extensive network of 156 high-resolution Doppler radar systems. The NEXRAD network provides centralized meteorological information for the continental United States and selected overseas locations. The maximum range of a single NEXRAD site is 250 nm.

Individual NEXRAD sites supply the network with radar images, and the images from each radar site may arrive at the network at different rates and times. Periodically, the weather data provider compiles the available individual site images from the network to form a composite image, and assigns a single time to indicate when it created the image. This image becomes the NEXRAD weather product. Individual images--gathered from each NEXRAD site--differ in age, and are always older than the displayed NEXRAD weather product age. The data provider then sends the NEXRAD data to the SiriusXM Weather service, whose satellites transmit this information during the next designated broadcast time for the NEXRAD weather product.

Because of the time required to detect, assemble, and distribute the NEXRAD weather product, the displayed weather information contained within the product may be significantly older than the current radar synopsis and may not depict the current weather conditions. The NEXRAD weather product should never be used as a basis for maneuvering in, near, or around areas of hazardous weather regardless of the information it contains.

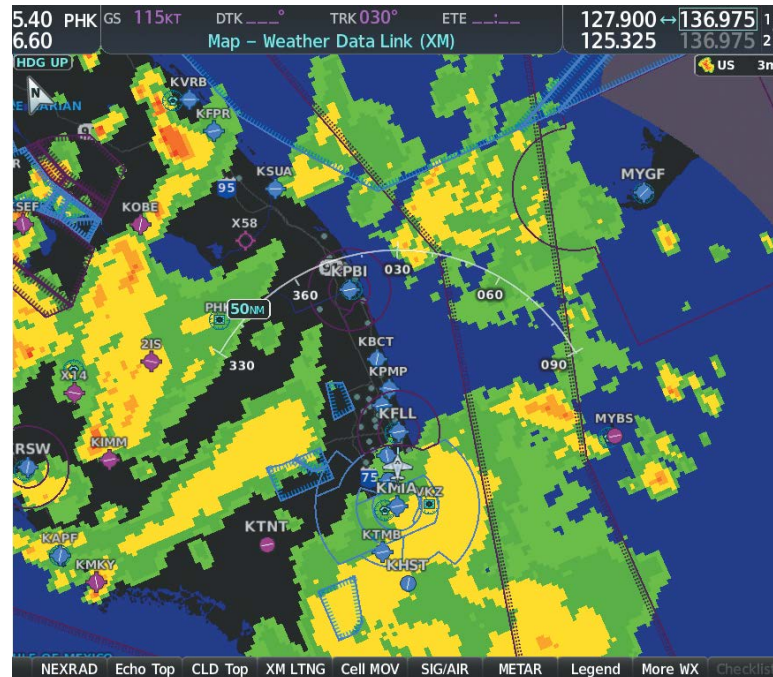


Figure 6-10 NEXRAD Weather Product on the Weather Data Link (XM) Page

For radar sites in the United States, the NEXRAD weather product shows a composite reflectivity image. This shows the *highest* radar energy received from multiple antenna tilt angles at various altitudes. For radar sites based in Canada, the NEXRAD weather product shows radar returns from the lowest antenna tilt angle, known as base reflectivity. The display of the information is color-coded to indicate the intensity of the echoes and the type of precipitation, if known.

Displaying the NEXRAD weather product on the 'Map - Weather Data Link (XM)' Page

- 1) Select the 'Map - Weather Data Link (XM)' Page.
- 2) Press the **NEXRAD** Softkey.

A mosaic of data from all the available NEXRAD radar sites is shown.

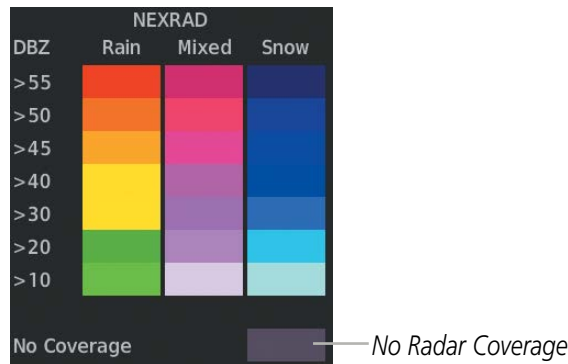


Figure 6-11 NEXRAD Weather Product Legend

Displaying the NEXRAD weather product on the 'Map - Navigation Map' Page

- 1) Press the **Map Opt** Softkey.
- 2) Press the **NEXRAD** Softkey.

Displaying the NEXRAD weather product on PFD maps

- 1) Press the **Map/HSI** Softkey.
- 2) Press the **NEXRAD** Softkey to enable/disable the display of NEXRAD information.

The display of No Radar Coverage is always active when either NEXRAD or Echo Tops is selected. Areas where NEXRAD radar coverage and Echo Tops information is not currently available or is not being collected are indicated in gray shade of purple.

The pilot can select either the United States or Canada region for the desired NEXRAD coverage area on the Weather Data Link (XM) Page. NEXRAD information is shown for the selected region, while a gray shade of purple is shown for the region which is not selected.

Selecting the NEXRAD Coverage Region on the Weather Data Link (XM) Page:

- 1) Press the **MENU** Key.
- 2) Turn the **FMS** Knob to select 'Weather Setup' and press the **ENT** Key.
- 3) With Product Group 1 selected, turn the large **FMS** Knob to highlight the NEXRAD Region field.
- 4) Turn the small FMS Knob to select 'US' or 'CNDA', then press the **ENT** Key.
- 5) To remove the menu, push the **FMS** Knob or the **CLR** Key.

The NEXRAD weather product age display indicates either 'US' or 'CN' for the selected coverage region.

REFLECTIVITY

Reflectivity is the amount of transmitted power returned to the radar receiver. Colors on the NEXRAD display are directly correlative to the level of detected reflectivity. Reflectivity as it relates to hazardous weather can be very complex.

The role of radar is essentially to detect moisture in the atmosphere. Simply put, certain types of weather reflect radar better than others. The intensity of a radar reflection is not necessarily an indication of the weather hazard level. For instance, wet hail returns a strong radar reflection, while dry hail does not. Both wet and dry hail can be extremely hazardous.

The different NEXRAD echo intensities are measured in decibels (dB) relative to reflectivity (Z). NEXRAD measures the radar reflectivity ratio, or the energy reflected *back to* the radar receiver (designated by the letter Z). The value of Z increases as the returned signal strength increases.

NEXRAD LIMITATIONS

NEXRAD radar images may have certain limitations:

- Undetermined precipitation types may be displayed as mixed.
- An individual NEXRAD site cannot depict high altitude storms at close ranges. It has no information about storms directly over the site.
- Precipitation may be occurring below the lowest antenna tilt angle (0.5°), and therefore the radar beam overshoots the precipitation. For example, at a distance of 124 miles from the radar site, the radar beam is approximately 18,000 feet above the radar site. The radar cannot detect any precipitation occurring below the beam at this distance and altitude.
- At smaller map ranges, the smallest square block on the display represents an area of approximately four square kilometers. The intensity level reflected by each square represents the highest level of radar reflectivity sampled within the area.
- Unknown precipitation below 52°N is displayed as rain regardless of actual precipitation type.

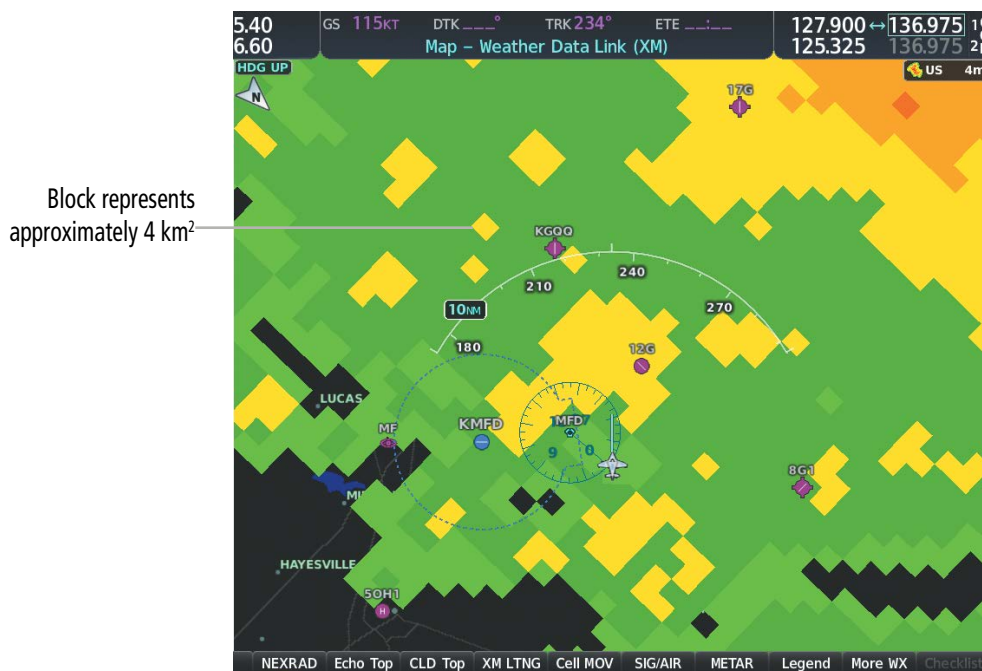


Figure 6-12 NEXRAD Weather Product with 30 NM Map Range

The following may cause abnormalities in displayed NEXRAD radar images:

- Ground clutter
- Strokes and spurious radar data
- Sun strokes (when the radar antenna points directly at the sun)
- Interference from buildings or mountains, which may cause shadows
- Metallic dust (chaff) from military aircraft, which can cause alterations in radar scans

NEXRAD LIMITATIONS (CANADA)

- Radar coverage extends to 55°N.
- Any precipitation displayed between 52°N and 55°N is displayed as mixed precipitation regardless of actual precipitation type.
- If the precipitation type is unknown, the system displays the precipitation as rain, regardless of actual precipitation type.



Figure 6-13 NEXRAD Weather Product - Canada

NEXRAD (FIS-B)



NOTE: The NEXRAD weather product cannot be displayed at the same time as terrain.

The National Weather Service (NWS) operates the WSR-88D, or NEXRAD (NEXt-generation RADar) system, an extensive network of 156 high-resolution Doppler radar systems. The NEXRAD network provides centralized meteorological information for the continental United States and selected overseas locations. The maximum range of a single NEXRAD site is 250 nm.

Individual NEXRAD sites supply the network with radar images, and the images from each radar site may arrive at the network at different rates and times. Periodically, the weather data provider to FIS-B compiles the available individual site images from the network to form a composite image, and assigns a single time to indicate when it created the image. This image becomes the NEXRAD weather product. Individual

images--gathered from each NEXRAD site--differ in age, and are always older than the displayed NEXRAD weather product age. The data provider then sends the NEXRAD data to the FIS-B GBTs, which transmit this information during the next designated broadcast time for the NEXRAD weather product.

Because of the time required to detect, assemble, and distribute the NEXRAD weather product, the displayed weather information contained within the product may be older than the current radar synopsis and may not depict the current weather conditions. NEXRAD information should never be used as a basis for maneuvering in, near, or around areas of hazardous weather regardless of the information it contains.



Figure 6-14 Regional NEXRAD Weather Product on the Weather Data Link (FIS-B) Page

The FIS-B NEXRAD weather product may be displayed for a region around the GBT (higher resolution, updated more frequently) or for across the continental United States (lower resolution, updated less frequently). A combined version of both weather products is also available for display on the same map. When the combined NEXRAD is selected, regional NEXRAD takes display precedence where data is available, and continental US NEXRAD is displayed outside of the regional NEXRAD coverage area.

Displaying the FIS-B NEXRAD weather product on the 'Map - Weather Data Link (FIS-B)' Page

- 1) Select the 'Map - Weather Data Link (FIS-B)' Page.
- 2) Press the **NXRD** Softkey. Each press cycles through a coverage option as the softkey name changes (**NXRD US**, **NXRD REG**, **NXRD OFF**, or **NXRD ALL**).

Or:

- 1) Press the **MENU** Key.
- 2) Turn the **FMS** Knob to highlight 'Weather Setup' and press the **ENT** Key.
- 3) To enable/disable the display of NEXRAD information for the continental United States, turn the small **FMS** Knob to highlight the NEXRAD On/Off field.
 - a) Turn the small **FMS** Knob to highlight 'On' to enable the display of NEXRAD or 'Off' to disable.
 - b) Press the **ENT** Key.
- 4) To select the region, turn the small **FMS** Knob to highlight the Region field.
 - a) Turn the small **FMS** Knob to select the desired region. (CONUS, Regional, or Combined)
 - b) Press the **ENT** Key.
- 5) When finished, push the **FMS** Knob.

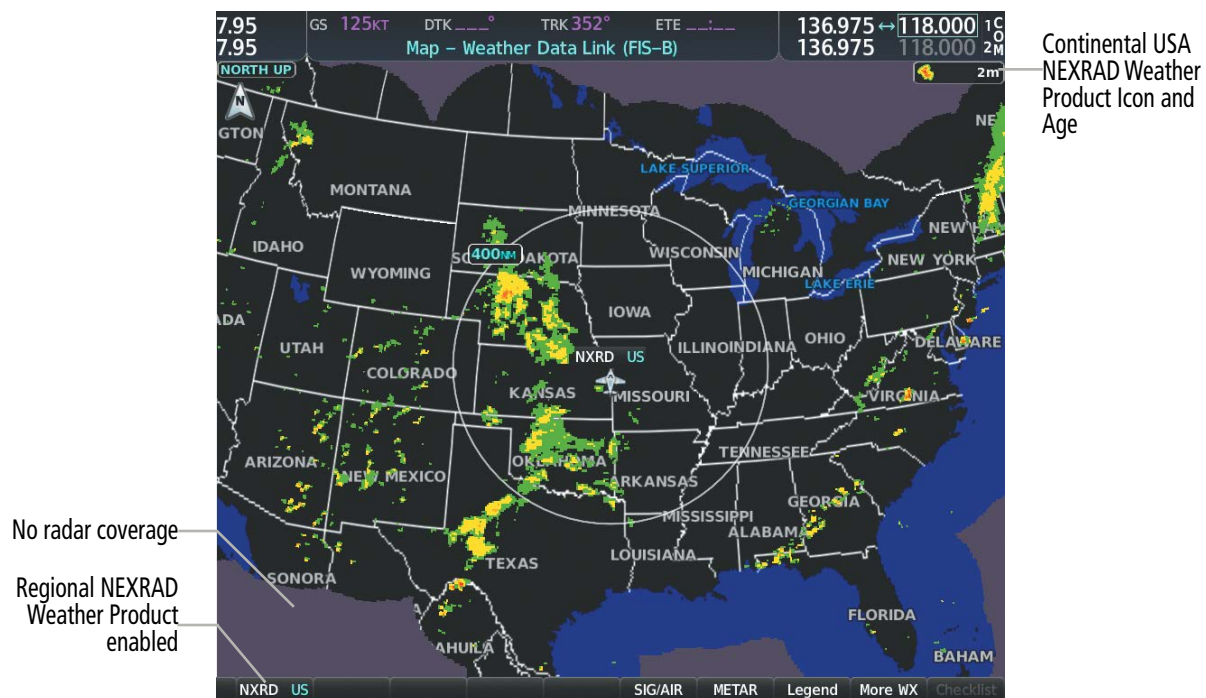


Figure 6-15 Continental US (CONUS) NEXRAD Weather Product on the Weather Data Link (FIS-B) Page




Figure 6-16 Weather Data Link (FIS-B) Page Menu

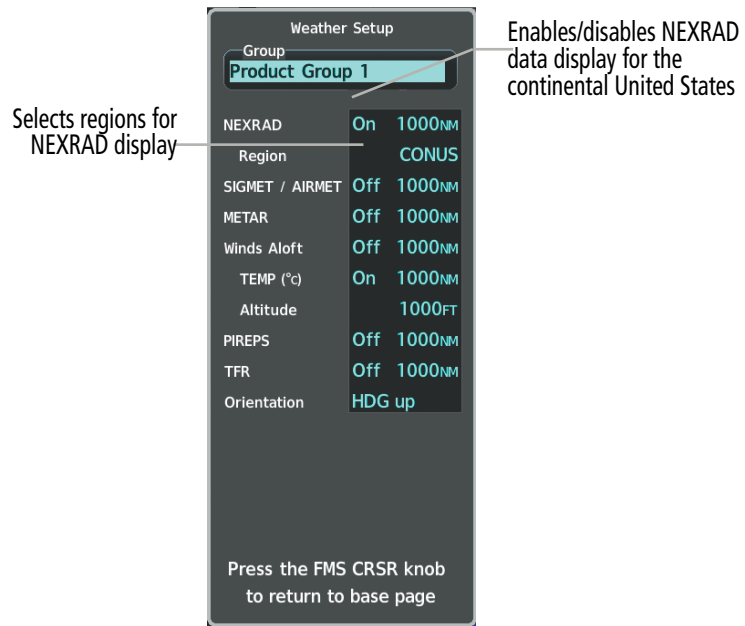


Figure 6-17 Weather Data Link (FIS-B) Page Setup Menu

Displaying the FIS-B NEXRAD weather product on the 'Map - Navigation Map' Page

- 1) Press the **Map Opt** Softkey.
- 2) Press the **NEXRAD** Softkey. Each press cycles through a coverage option as the softkey name changes (**US**, **RGNL**, or **US/RGNL**).
- Or:
- 3) Press the **MENU** Key.
- 4) With 'Map Settings' highlighted, press the **ENT** Key.
- 5) Turn the small **FMS** Knob to select the 'Weather' Group, then press the **ENT** Key.
- 6) Turn the large **FMS** Knob to highlight the NEXRAD Data Region field.
- 7) Turn the small **FMS** Knob to highlight 'CONUS' (continental United States), 'RGNL' (regional), or 'Combined', then press the **ENT** Key. This selection also affects display of NEXRAD on the PFD Maps.
- 8) When finished, push the **FMS** Knob or press the **CLR** Key.

Displaying the FIS-B NEXRAD weather product on PFD maps:

- 1) Press the **Map/HSI** Softkey.
- 2) Press the **NEXRAD** Softkey to enable/disable the display of NEXRAD information.

The regional NEXRAD weather product coverage area varies, as it is determined by the data received from ground-based sources. When the regional NEXRAD weather product is enabled, a white spiked boundary encloses this area to indicate the geographic limits of the regional NEXRAD coverage being displayed. The system shows composite radar data from all available NEXRAD sites inside of this boundary area.

If the continental United States version of the NEXRAD weather product is shown (**US** Softkey enabled), the coverage boundary is not shown on the map.

This data is composed of the maximum reflectivity from the individual radar sweeps. The display of the information is color-coded to indicate the weather severity level. All weather product legends can be viewed on the Weather Data Link (FIS-B) Page. For the NEXRAD legend, select the **Legend** Softkey when the NEXRAD weather product is enabled.

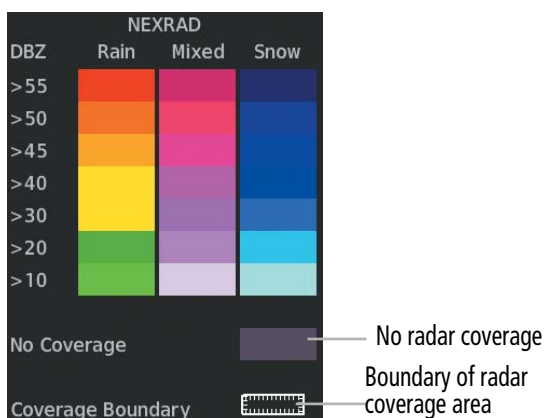


Figure 6-18 NEXRAD Weather Product Legend

The display of no radar coverage is enabled when NEXRAD is selected for display. Areas where radar data is not currently available, has not yet been received, or is not being collected are indicated in gray shade of purple.



NOTE: If the system has not received all available NEXRAD weather data (such as during initial FIS-B signal acquisition or in areas of marginal or poor signal reception), the system may display areas of no radar coverage which are subsequently removed as radar data is received. It may take up to approximately ten minutes to receive all FIS-B data, when adequate reception is available.

REFLECTIVITY

Reflectivity is the amount of transmitted power returned to the radar receiver. Colors on the NEXRAD display are directly correlative to the level of detected reflectivity. Reflectivity as it relates to hazardous weather can be very complex.

The role of radar is essentially to detect moisture in the atmosphere. Simply put, certain types of weather reflect radar better than others. The intensity of a radar reflection is not necessarily an indication of the weather hazard level. For instance, wet hail returns a strong radar reflection, while dry hail does not. Both wet and dry hail can be extremely hazardous. The different NEXRAD echo intensities are measured in decibels (dB) relative to reflectivity (Z). NEXRAD measures the radar reflectivity ratio, or the energy reflected *back to* the radar receiver (designated by the letter Z). The value of Z increases as the returned signal strength increases.

NEXRAD LIMITATIONS

NEXRAD radar images may have certain limitations:

- At smaller map ranges, individual blocks of NEXRAD weather data are viewable. For the regional version of the NEXRAD weather product, the smallest block represents 1.5 nm wide by 1 nm tall. For the continental United States version of the NEXRAD weather product, each block is 7.5 nm wide by 5 nm wide. The color of each block represents the *highest* radar reflectivity detected within that area.
- The continental US version of the NEXRAD weather product is not available above 60° of latitude.

The following may cause abnormalities in displayed NEXRAD radar images:

- Ground clutter
- Strokes and spurious radar data
- Sun strokes (when the radar antenna points directly at the sun)
- Interference from buildings or mountains, which may cause shadows
- Metallic dust (chaff) from military aircraft, which can cause alterations in radar scans

PRECIPITATION (GARMIN CONNEXT)



NOTE: *Precipitation data cannot be displayed at the same time as terrain data.*

The Precipitation weather product provides radar precipitation information in selected radar coverage areas. This information comes from individual weather radar sites and weather data sources such as government agencies. Each radar site or source may provide weather data at differing rates and times. Periodically, the Garmin Connext Weather service compiles the available information to form a composite image, and assigns a single time to indicate when it created the image. This image becomes the Precipitation weather product. Individual images--gathered from each radar site--differ in age, and are always older than the displayed Precipitation weather product age.

Because of the time required to detect, assemble, and distribute the Precipitation weather product, the displayed weather information contained within the product may be significantly older than the current radar synopsis and may not depict the current weather conditions. The Precipitation weather product should never be used as a basis for maneuvering in, near, or around areas of hazardous weather regardless of the information it contains.

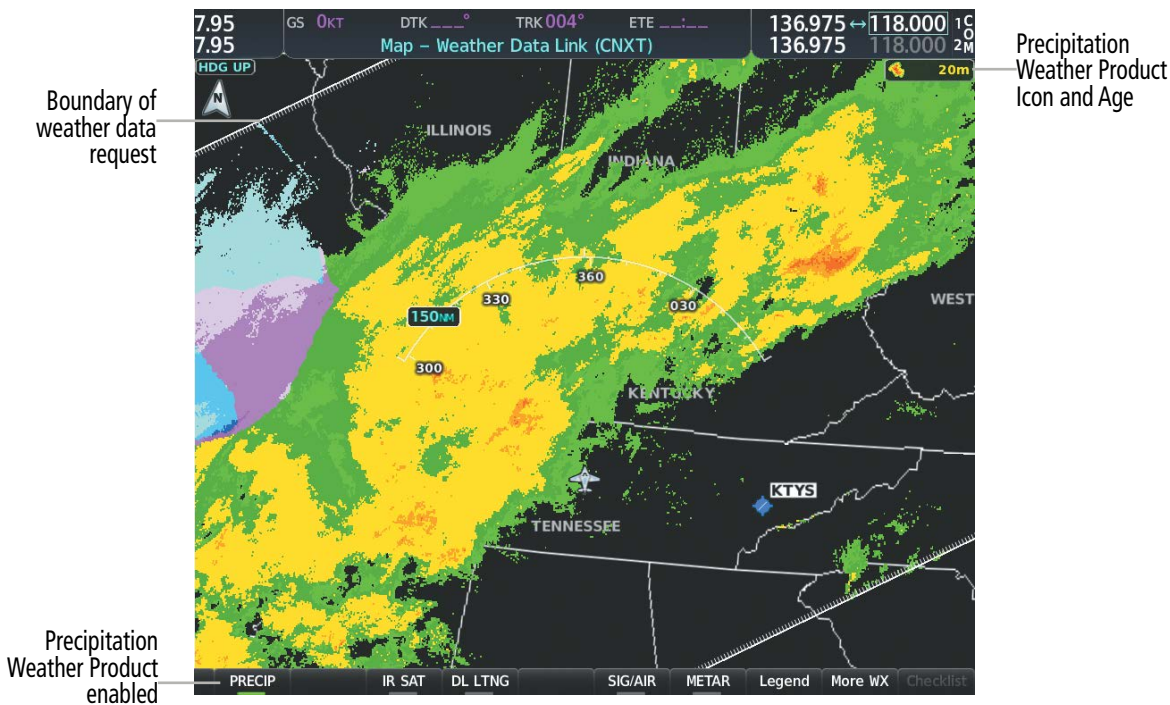


Figure 6-19 Precipitation Weather Product on the Weather Data Link (CNXT) Page

Displaying Precipitation weather information:

- 1) Press the **Map Opt** Softkey (for PFD maps, press the **Map/HSI** or **Map Opt** Softkey). This step is not necessary on the Weather Data Link (CNXT) Page.
- 2) Press the **PRECIP** Softkey.

The system displays either base or composite radar imagery, depending on the region.

Region	Radar Reflectivity Type
United States	Composite Reflectivity
Canada, Europe, Australia	Base Reflectivity

The base reflectivity precipitation weather product shows the radar returns from the perspective of a single antenna tilt angle. The composite reflectivity precipitation weather product shows the *highest* radar energy received from multiple antenna tilt angles. The display of the information is color-coded to indicate the intensity of the echoes and the type of precipitation.

All weather product legends can be viewed on the Weather Data Link (CNXT) Page. For the Precipitation legend, press the **Legend** Softkey when Precipitation is selected for display.

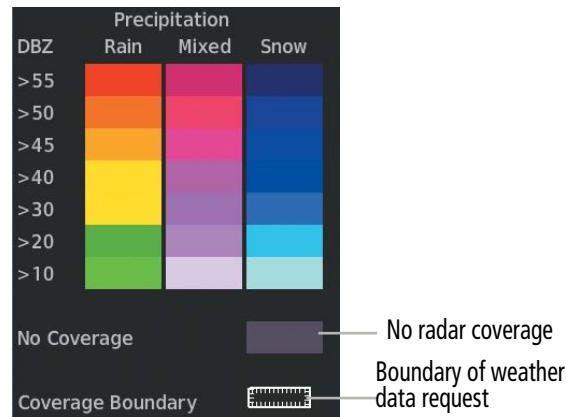


Figure 6-20 Precipitation Weather Product Legend

The display of radar coverage is enabled active when Precipitation is selected for display. Areas where precipitation radar coverage is not currently available or is not being collected are indicated in gray shade of purple. A white boundary line depicting the selected coverage area of the Connex Data Request encloses the precipitation data when this weather product is displayed.

REFLECTIVITY

Reflectivity is the amount of transmitted power returned to the radar receiver. Colors on the Precipitation display directly correlate to the level of detected reflectivity. Reflectivity as it relates to hazardous weather can be very complex.

The role of radar is essentially to detect moisture in the atmosphere. Simply put, certain types of weather reflect radar better than others. The intensity of a radar reflection is not necessarily an indication of the weather hazard level. For instance, wet hail returns a strong radar reflection, while dry hail does not. Both wet and dry hail can be extremely hazardous.

The different radar echo intensities are measured in decibels (dB) relative to reflectivity (Z). Weather radars measure the reflectivity ratio, or the energy reflected *back to* the radar receiver (designated by the letter Z). The value of Z increases as the returned signal strength increases.

PRECIPITATION LIMITATIONS

Radar images may have certain limitations:

- Radar composite reflectivity does not provide sufficient information to determine precipitation characteristics (wet hail vs. rain). For example, it is not possible to distinguish between wet snow, wet hail, and rain.
- An individual radar site cannot depict high altitude storms at close ranges. It has no information about storms directly over the site.
- At smaller map ranges, individual blocks of radar data are viewable. Each block of radar information represents approximately four square kilometers and depicts the highest level of reflectivity detected within that area.



- Ground clutter
- Strokes and spurious radar data
- Sun strokes (when the radar antenna points directly at the sun)
- Interference from buildings or mountains, which may cause shadows
- Metallic dust (chaff) from military aircraft, which can cause alterations in radar scans

ECHO TOPS (SIRISUXM)



The Echo Tops weather product shows the location, elevation, and direction of the highest radar echo. The highest radar echo does not indicate the top of a storm or clouds; rather it indicates the highest altitude at which precipitation is detected. Information is derived from NEXRAD data.



Altitude for selected Echo Top

Figure 6-22 Echo Tops Weather Product

Displaying Echo Tops information:

- 1) Select the 'Weather Data Link' Page.
- 2) Press the **Echo Top** Softkey.

Since Echo Tops and Cloud Tops use the same color scaling to represent altitude, display of these weather products is mutually exclusive. When Echo Tops is activated, NEXRAD and Cloud Tops data are removed.

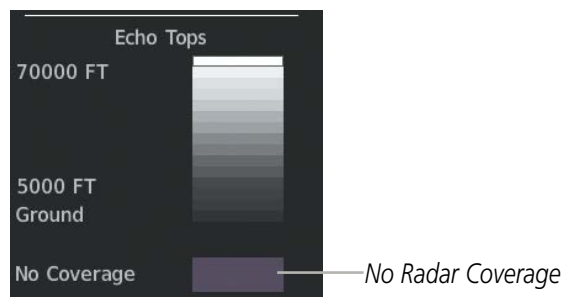


Figure 6-23 Echo Tops Legend

CLOUD TOPS (SIRIUSXM)



NOTE: Cloud Tops and Echo Tops cannot be displayed at the same time.



NOTE: If a GDL 69/69A SXM receiver is installed, the broadcast rate for Cloud Tops is 30 minutes. As with all SiriusXM Weather products, the product age becomes amber when it reaches half of the expiration time, which is 60 minutes for Cloud Tops. Therefore, this weather product age may be amber during routine

operation.

The Cloud Tops weather product depicts cloud top altitudes as determined from satellite imagery.

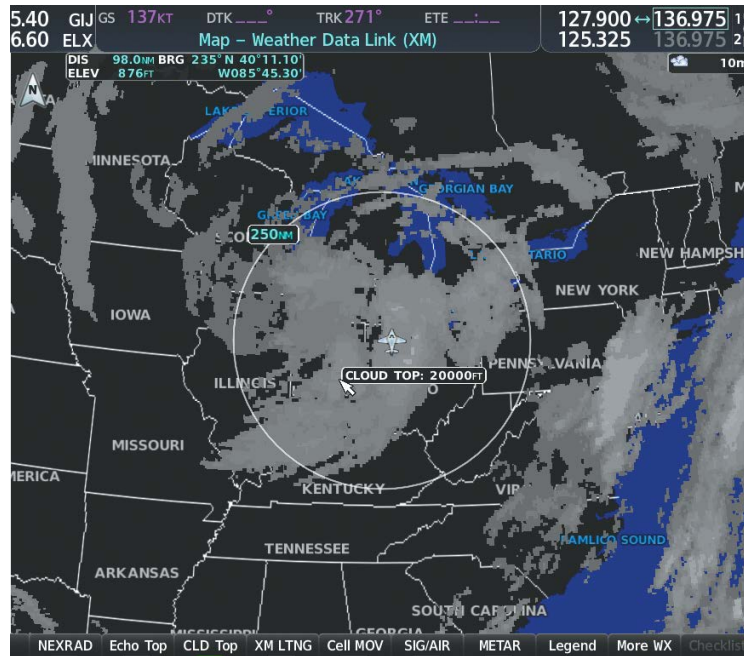


Figure 6-24 Cloud Tops Weather Product

Displaying Cloud Tops information:

- 1) Select the 'Weather Data Link' Page with the **FMS** Knob.
- 2) Press the **CLD Top** Softkey.

Since Cloud Tops and Echo Tops use the same color scaling to represent altitude, display of these weather products is mutually exclusive. When Cloud Tops is activated, Echo Tops data is removed.




Figure 6-25 Cloud Tops Legend

DATA LINK LIGHTNING (SIRIUSXM, GARMIN CONNEXT)



NOTE: Lightning from a data link source cannot be displayed simultaneously on the same map as information from an optional on-board lightning detection system.

The Data Link Light weather product shows the approximate location of cloud-to-ground lightning strikes. A strike icon represents a strike that has occurred within a two-kilometer region. The exact location of the lightning strike is not displayed.

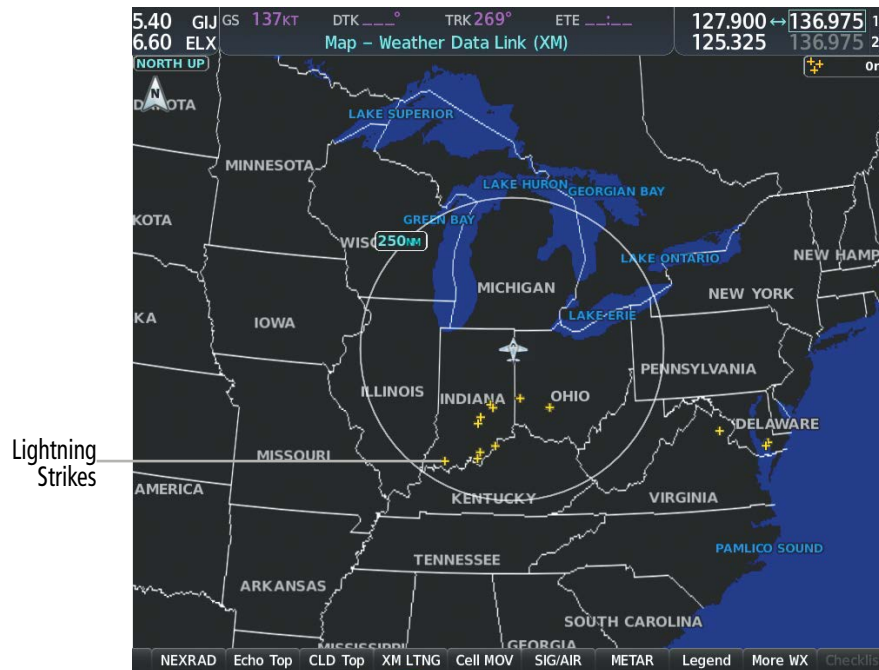


Figure 6-26 Data Link Weather Product

Displaying Data Link Lightning information on Weather Data Link Page:

- 1) Turn the **FMS** Knob to select the Weather Data Link Page.
- 2) Press the **XM LTNG** or **DL LTNG** Softkey (softkey name depends on the selected weather source).

To display the Lightning legend on the Weather Data Link Page, select the **Legend** Softkey when Data Link Lightning is selected for display.




Figure 6-27 Data Link Lightning Legend

Displaying Data Link Lightning information on the Navigation Map Page:

- 1) Turn the **FMS** Knob to select the Navigation Map Page.
- 2) Press the **Map Opt** Softkey.
- 3) Press the **XM LTNG** or **DL LTNG** Softkey.

Enabling/disabling Data Link Lightning information on PFD maps:

- 1) On the PFD, press the **Map/HSI** Softkey.
- 2) Press the **Lightning** Softkey.
- 3) Press the **Datalink** Softkey to enable data link lightning from the selected data link weather source, or press the **LTNG Off** Softkey to disable data link lightning.
- 4) When finished, press the **Back** Softkey.

CELL MOVEMENT (SIRIUSXM)

The Cell Movement weather product shows the location and movement of storm cells as identified by the ground-based system. Cells are represented by yellow squares, with direction of movement indicated with short, orange arrows.

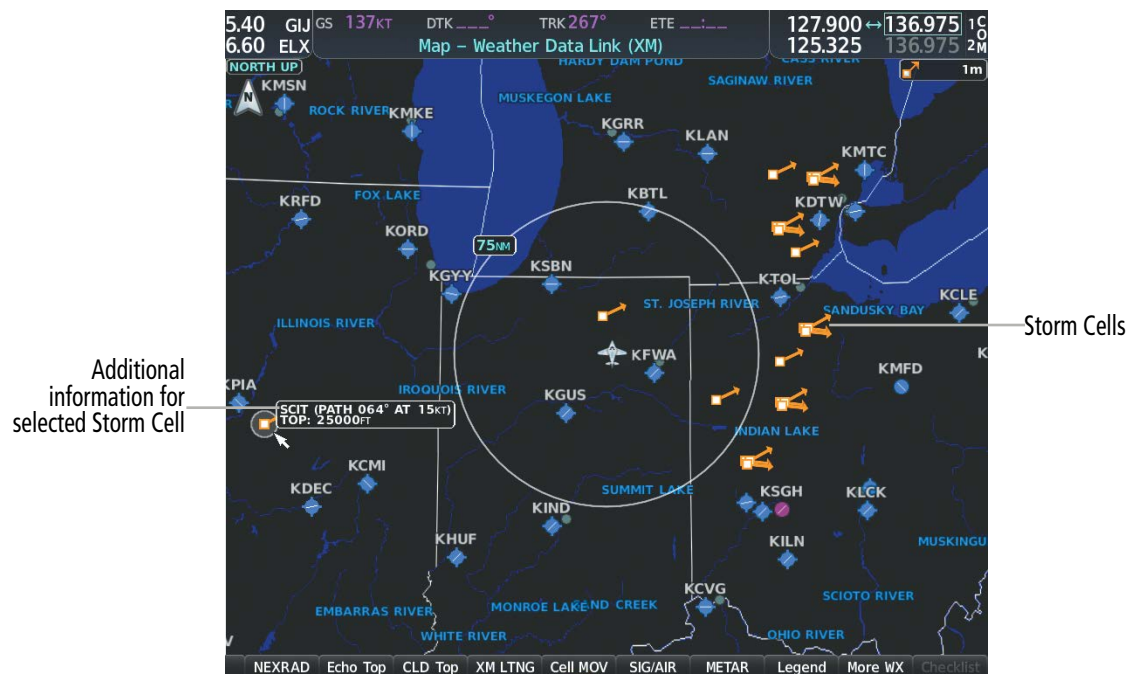


Figure 6-28 Cell Movement Weather Product

On the Weather Data Link (XM) Page, the Cell Movement weather product has a dedicated **CEL MOV** softkey for enabling/disabling this weather product on this page.



NOTE: The Storm Cell base height is not available if a GDL 69 SXM or 69A SXM data link receiver is installed. In this case, the Storm Cell base height is displayed as 0 feet when the map pointer selects a storm cell.

Displaying Cell Movement information on the Weather Data Link (XM) Page:

- 1) Select the 'Map -Weather Data Link (XM)' Page using the **FMS** Knob.
- 2) Press the **Cell MOV** Softkey.




Figure 6-29 Cell Movement Legend

For navigation maps, the pilot can enable/disable the Cell Movement weather product using the **NEXRAD** Softkey. For this to occur, the pilot must first enable the 'Cell Movement' option in the Map Settings menu of the Navigation Map Page.

Setting up the system to display Cell Movement with NEXRAD on navigation maps:

- 1) Use the **FMS** Knob to select the 'Map - Navigation Map' Page.
- 2) Press the **MENU** Key.
- 3) With 'Map Settings' highlighted, press the **ENT** Key.
- 4) Turn the small **FMS** Knob to highlight 'Weather' and press the **ENT** Key.
- 5) Turn the large **FMS** Knob to 'On' or 'Off' for the Cell Movement menu option. When set to 'On', Cell Movement is enabled/disabled with the NEXRAD weather product on navigation maps. When set to 'Off', Cell Movement is not displayed on navigation maps.
- 6) When finished, push the **FMS** Knob or **CLR** Key to remove the menu.

After the 'Cell Movement' option is set to 'On', refer to the previous procedures for enabling/disabling the NEXRAD weather product to control both products simultaneously on navigation maps using the **NEXRAD** Softkey.

INFRARED SATELLITE (GARMIN CONNEXT)

The Infrared Satellite (IR SAT) weather product depicts cloud top temperatures from satellite imagery. Brighter cloud top colors indicate cooler temperatures occurring at higher altitudes.

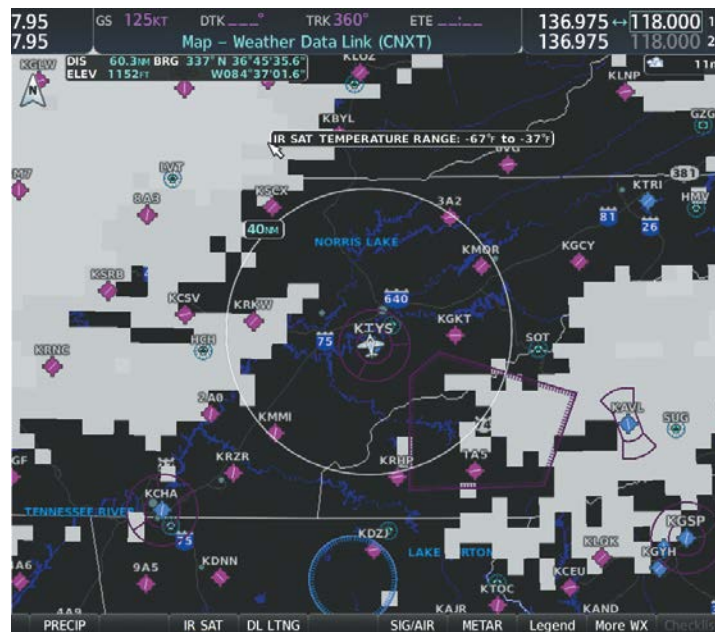


Figure 6-30 Infrared Satellite Weather Product on the Weather Data Link (CNXT) Page

Displaying Intrared Satellite information:

- 1) Select the 'Weather Data Link (CNXT)' Page.
- 2) Select the **IR SAT** Softkey.

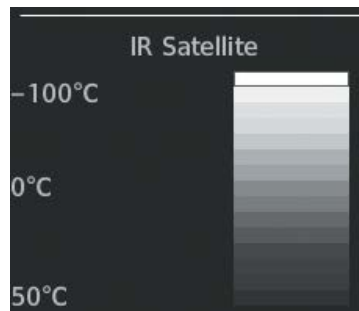


Figure 6-31 Infrared Satellite Legend

SIGMETS AND AIRMETS

SIGMET (SIGnificant METeorological Information) and AIRMET (AIRmen's METeorological Information) are issued for potentially hazardous weather. A Convective SIGMET is issued for hazardous convective weather such as severe or widespread thunderstorms. A localized SIGMET is a significant weather condition occurring at a localized geographical position.



NOTE: If SiriusXM Weather is the active data link weather source and a GDL 69/69A SXM receiver installed, the SIGMET and AIRMET weather products are not available unless at least one SIGMET or AIRMET has been received. The weather product age indicates 'N/A' when no SIGMET or AIRMET is available.

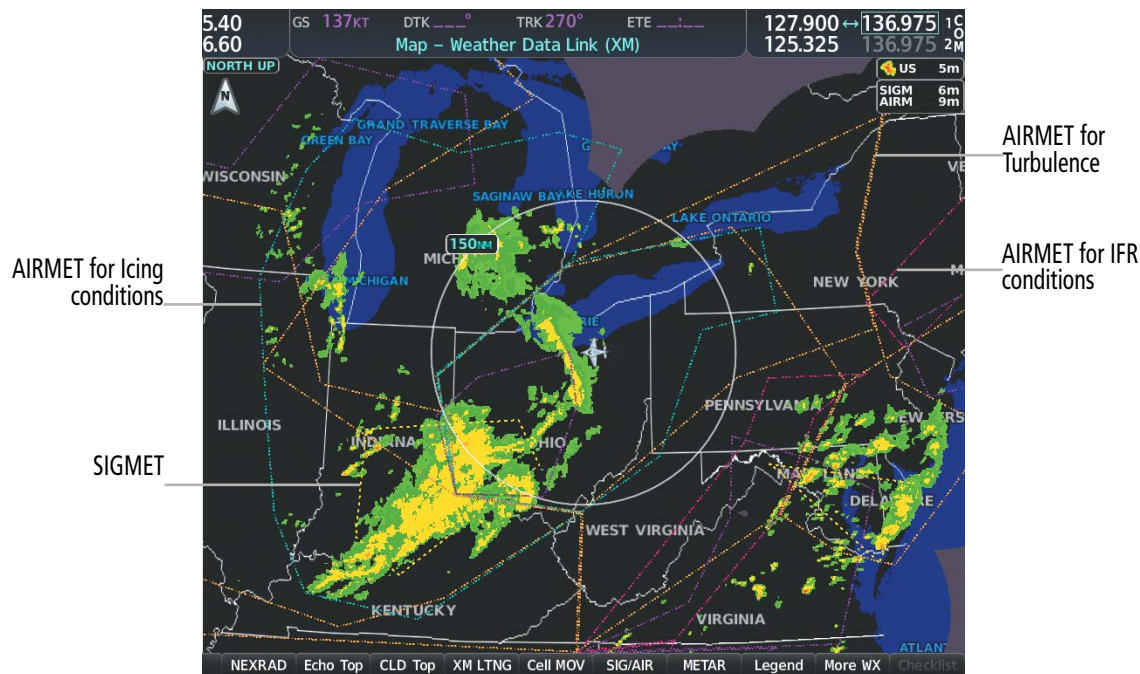


Figure 6-32 SIGMET/AIRMET Data

Displaying SIGMETs and AIRMETs:

- 1) Select the Weather Data Link Page.
- 2) Press the **SIG/AIR** Softkey.
- 3) To view the text of the SIGMET or AIRMET, press the **Joystick** and move the Map Pointer over the icon.
- 4) Press the **ENT** key. The following figure shows sample SIGMET text.

Information
SIGMET / AIRMET
1 CONVECTIVE SIGMET
32CVALID UNTIL
2255ZSD MT WYFROM
60ENE DPR-10W PIR-
50S RAP-90NW RAP-
60ENE DPRAREA TS
MOV FROM 31020KT.
TOPS TO FL430.

Sample SIGMET Text

SIGMET / AIRMET
SIGMET -----
Localized SIGMET 

Icing -----
Turbulence -----
IFR -----
MTN Obscuration -----
Surface Winds -----

SIGMET/AIRMET Legend

Figure 6-33 SIGMET/AIRMET Text and Legend

METARS AND TAFS



NOTE: Atmospheric pressure as reported for METARs is given in hectopascals (hPa), except for in the United States, where it is reported in inches of mercury (in Hg). Temperatures are reported in Celsius.



NOTE: METAR information is only displayed within the installed navigation database service area.

METARs (METeorological Aerodrome Reports) typically contain information about the temperature, dewpoint, wind, precipitation, cloud cover, cloud heights, visibility, and barometric pressure at an airport or observation station. They can also contain information on precipitation amounts, lightning, and other critical data. METARs reflect hourly observations; non-routine updates include the code “SPECI” in the report. METARs are shown as colored flags at airports that provide them.

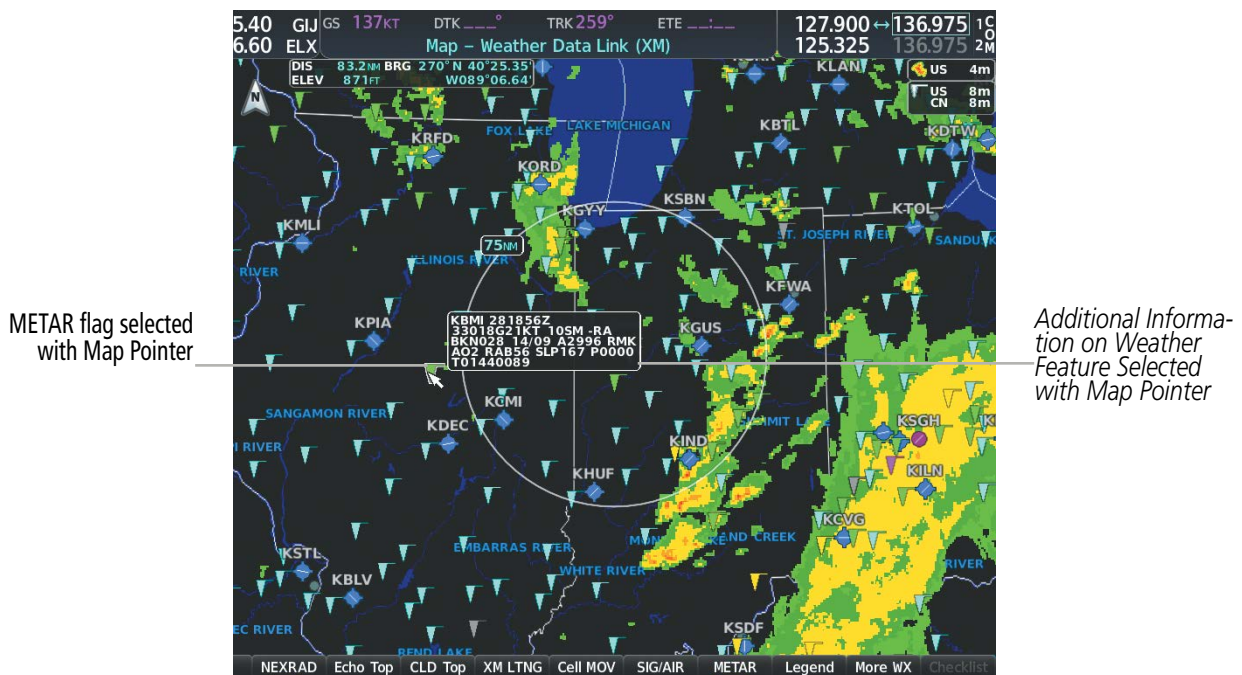


Figure 6-34 METAR Flags on the Weather Data Link Page

TAFs (Terminal Aerodrome Forecasts) are weather predictions for specific airports within a 24- hour period, and may span up to 36 hours. TAFs typically include forecast wind, visibility, weather phenomena, and sky conditions using METAR codes.

METAR and TAF text are displayed on the Weather Information Page. METAR data is displayed first in a decoded fashion, followed by the original text. Note the original text may contain additional information not found in the decoded version. TAF information is displayed only in its original form when TAFs are available.

Displaying METAR and TAF text on the MFD:

- 1) On the 'Weather Data Link' Page, press the **METAR** Softkey.
- 2) Press the **Joystick** and pan to the desired airport.
- 3) Press the **ENT** Key. The Weather Information Page is shown with METAR and TAF text.
- 4) Use the **FMS** Knob or the **ENT** Key to scroll through the METAR and TAF text. METAR text must be completely scrolled through before scrolling through the TAF text.
- 5) Push the **FMS** Knob or the **CLR** Key to return to the Weather Data Link Page.

Or:

- 1) Turn the large **FMS** Knob to select the Waypoint Page Group
 - a) Select the Airport Information Page.
 - b) Press the **WX** Softkey to select the Weather Information Page.
- 2) Push the **FMS** Knob to display the cursor.
- 3) Use the **FMS** Knob to enter the desired airport and press the **ENT** Key.
- 4) Use the **FMS** Knob or the **ENT** Key to scroll through the METAR and TAF text. Note the METAR text must be completely scrolled through before scrolling through the TAF text.



Figure 6-35 METAR and TAF Text on the Weather Information Page

To display the METAR legend on the Weather Data Link (XM) Page, select the **Legend** Softkey when METARs are enabled for display.

The METAR flag color is determined by the information in the METAR text. The system displays a gray METAR flag when the system cannot determine the METAR category based on the information available.




Figure 6-36 METAR Legend

The system also shows METAR flags and their associated text on the Active Flight Plan Page on the MFD. The system shows a METAR flag next to waypoints in the flight plan with an available METAR.

Displaying original METAR text on the Active Flight Plan Page:

- 1) Select the 'FPL - Active Flight Plan' Page on the MFD.
- 2) Push the **FMS** Knob to activate the cursor.
- 3) Turn the large **FMS** Knob to highlight a waypoint with an available METAR (indicated with a METAR flag next to it). The METAR text will appear in the 'Selected Waypoint Weather' Window below.
- 4) When finished, push the **FMS** Knob to remove the cursor or press the **FPL** Key to exit the Active Flight Plan Page.

Original METAR text is also accessible on navigation maps displaying METAR flags. When the map pointer is panned over a METAR flag, the METAR text is shown in a box near the flag.

Displaying original METAR text information on the PFD Inset Map:

- 1) On the PFD, press the **Map/HSI** Softkey.
- 2) Press the **METAR** Softkey.
- 3) Press the **Joystick** and pan to the desired METAR flag. Original METAR text appears on the map.
- 4) When finished, press the **Joystick** to remove the Map Pointer.

SURFACE ANALYSIS AND CITY FORECAST (SIRIUSXM)

Surface Analysis and City Forecast information is available for current and forecast weather conditions. Forecasts are available for intervals of 12, 24, 36, and 48 hours.

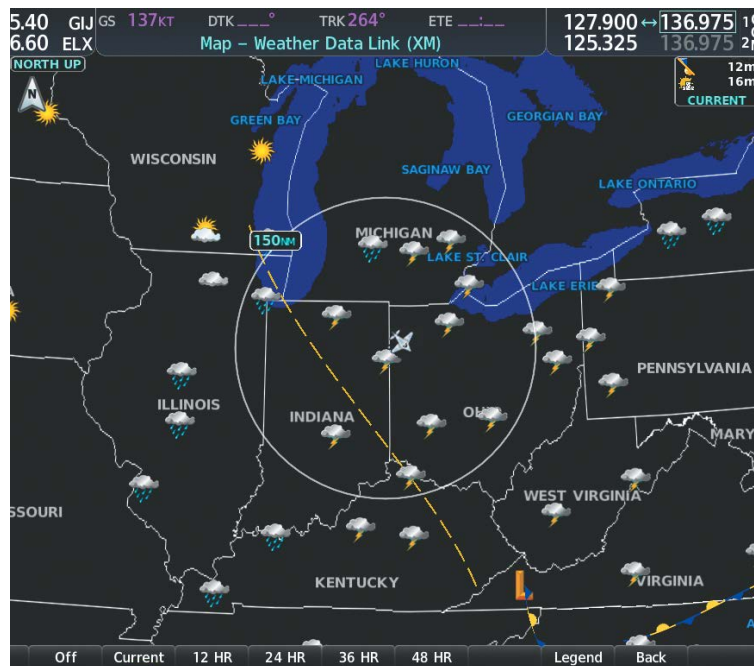


Figure 6-37 Current Surface Analysis Data

Displaying Surface Analysis and City Forecast information:

- 1) Select the 'Map - Weather Data Link' Page.
- 2) Press the **More WX** Softkey.
- 3) Press the **SFC** Softkey.
- 4) Press the softkey for the desired forecast time: **Current**, **12 HR**, **24 HR**, **36 HR**, or **48 HR**. The **SFC** Softkey label changes to show the forecast time selected.

Or:

Press the **Off** Softkey to disable the display of the weather product.



Figure 6-38 Surface Analysis Legend

FREEZING LEVEL (SIRIUSXM)

The Freezing Level weather product shows the color-coded contour lines for the altitude and location at which the first isotherm is found. When no data is displayed for a given altitude, the data for that altitude has not been received, or is out of date and has been removed from the display. New data appears when it becomes available.



Figure 6-39 Freezing Level Data

Displaying Freezing Level information:

- 1) Select the 'Map - Weather Data Link' Page.
- 2) Press the **More WX** Softkey.
- 3) Press the **FRZ LVL** Softkey.



Figure 6-40 Freezing Levels Legend

WINDS ALOFT

The Winds Aloft weather product shows the forecast wind speed and direction at the surface and at selected altitudes. Altitude can be displayed in 3000-foot increments beginning at the surface up to 42,000 feet MSL.

If the FIS-B option is installed and FIS-B is the active data link weather source, the Winds Aloft weather product also displays temperatures aloft next to the winds aloft arrows on the Weather Data Link (FIS-B) Page.

Displaying the Winds Aloft weather product:

- 1) Select the 'Map - Weather Data Link' Page with the **FMS** Knob.
- 2) Press the **More WX** Softkey.
- 3) Press the **Wind** Softkey.
- 4) Select a softkey for the desired altitude level: **SFC** (surface) up to 42,000 feet. Select the **Next** or **Prev** Softkey to cycle through the altitude softkeys. The **Wind** Softkey label changes to reflect the altitude selected.

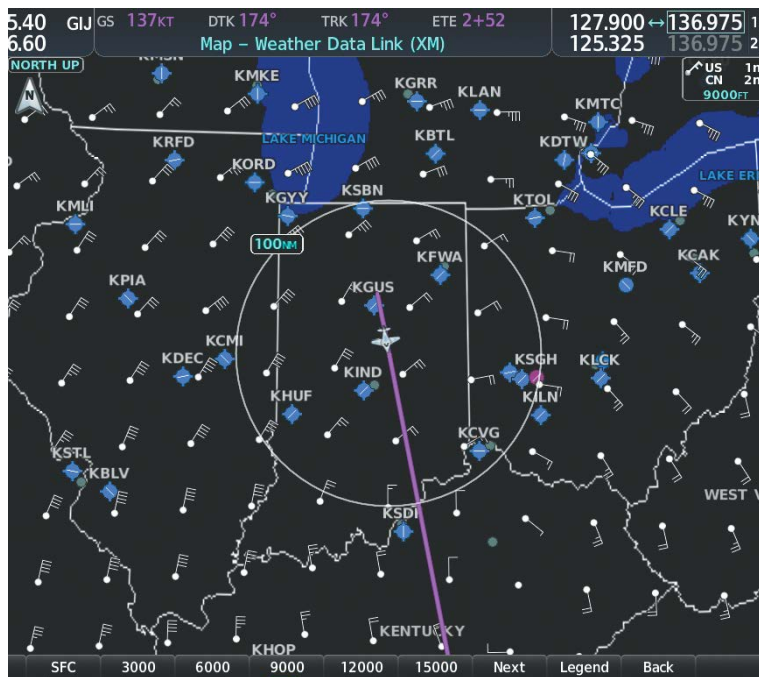


Figure 6-41 Winds Aloft Data at 12,000 Feet

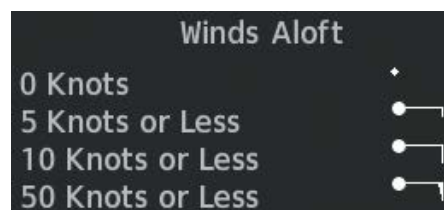


Figure 6-42 Winds Aloft Data with Legend

Headwind and tailwind components aloft are available inside the Vertical Situation Display (VSD) on the Navigation Map Page. The displayed components are relative to current aircraft altitude and track, but not to aircraft speed.

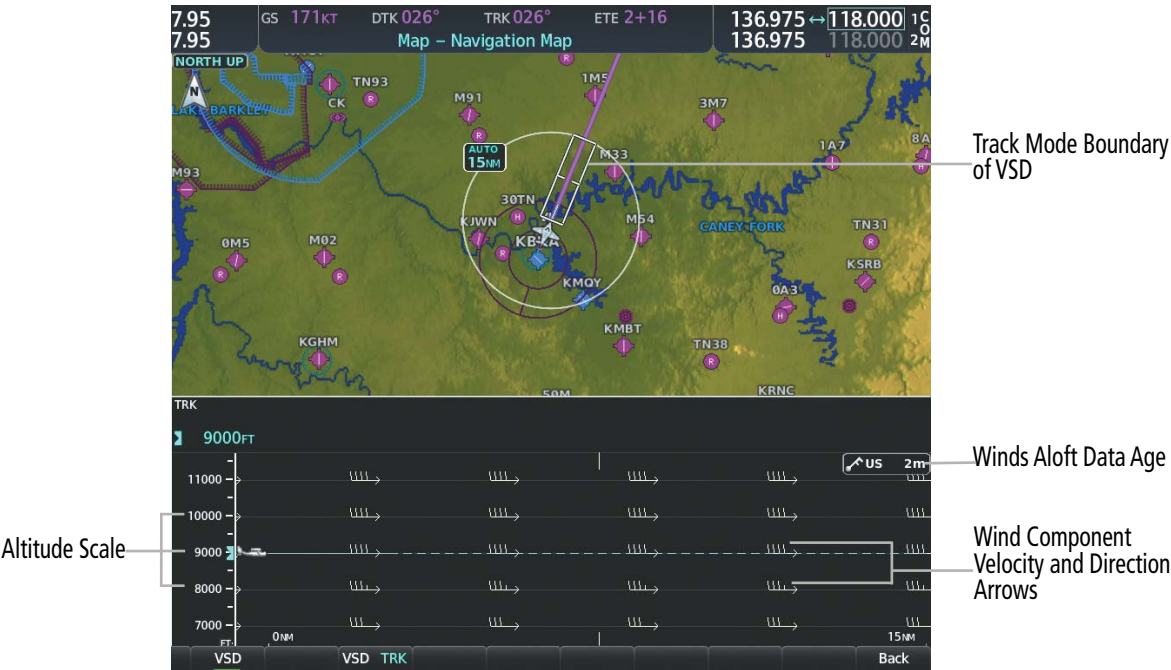


Figure 6-43 Navigation Map Page with Winds Aloft Data on Profile View

Arrows pointing to the left indicate headwind components; tailwind component arrows point to the right, as shown in Table 6-5.

Headwind Symbol	Tailwind Symbol	Headwind/Tailwind Component
None	None	Less than 5 knots
←	→	5 knots
←←	→→	10 knots
←←←	→→→	50 knots

Table 6-5 VSD Headwind/Tailwind Component Symbols

Enabling/disabling the Vertical Situation Display (containing winds aloft data):

- 1) Select the 'Map - Navigation Map' Page.
- 2) Press the **Map Opt** Softkey.
- 3) Press the **Inset** Softkey.
- 4) Press the **VSD** Softkey to enable/disable the Vertical Situation Display.

Or:

- 1) Select the 'Map - Navigation Map' Page.
- 2) Press the **MENU** Key.
- 3) Turn the FMS Knob to highlight 'Show VSD' or 'Hide VSD' and press the **ENT** Key.

Winds Aloft data inside the VSD is enabled by default when the VSD is displayed on the Navigation Map Page. This behavior can be changed on the Navigation Map Page.

Enabling/disabling winds aloft data display for the VSD:

- 1) Select the 'Map - Navigation Map' Page.
- 2) Press the **MENU** Key.
- 3) With 'Map Settings' highlighted, press the **ENT** Key.
- 4) Turn the small **FMS** Knob to select 'VSD' and press the **ENT** Key.
- 5) Turn the large **FMS** Knob to highlight the Winds on/off field.
- 6) Turn the small **FMS** Knob to select 'On' or 'Off'.
- 7) Push the **FMS** Knob or **CLR** Key to return to the 'Map - Navigation Map' Page with the changed settings.

COUNTY WARNINGS (SIRIUSXM)

The County warning weather product provides specific public awareness and protection weather warnings from the National Weather Service (NWS). This can include information on tornadoes, severe thunderstorms, and flood conditions.

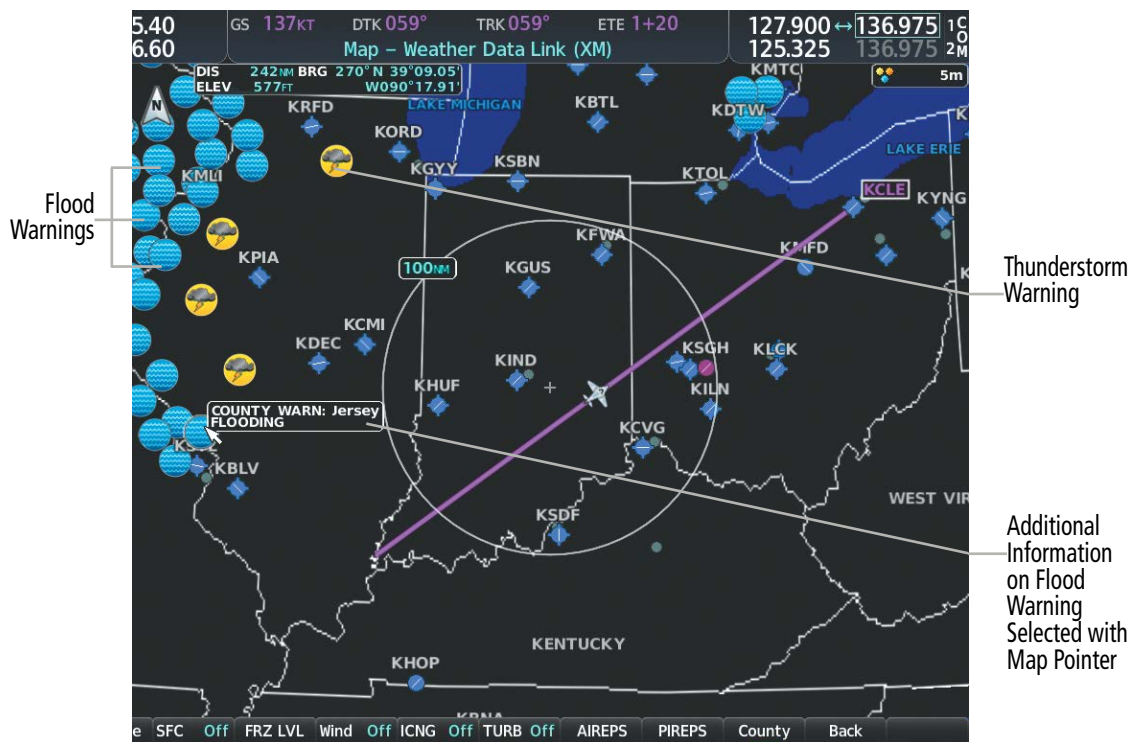


Figure 6-44 County Flood Warning

Displaying County Warning information:

- 1) Select the 'Map - Weather Data Link' Page with the **FMS** Knob.
- 2) Press the **More WX** Softkey.
- 3) Press the **County** Softkey.

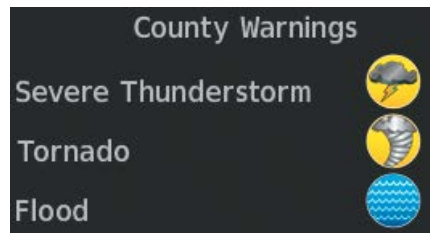


Figure 6-45 County Warnings Legend

CYCLONE (SIRIUSXM)

The Cyclone weather product shows the current location of cyclones (hurricanes), tropical storms, and their projected tracks. The system displays the projected track information in the form of DD/HH:MM.



Figure 6-46 Cyclone Weather Product on the Weather Data Link (XM) Page

Displaying cyclone (hurricane) track information:

- 1) Select the 'Map - Weather Data Link' Page with the **FMS** Knob.
- 2) Press the **More WX** Softkey.
- 3) Press the **Cyclone** Softkey.




Figure 6-47 Cyclone Legend



NOTE: The Cyclone weather product is not available unless at least one cyclone or tropical storm has been received. The weather product age indicates 'N/A' when no cyclone or tropical storm has been received.

ICING (CIP & SLD) (SIRIUSXM)

The Current Icing Product (CIP) weather product shows a graphical view of the current icing environment. Icing severity is displayed in four categories: light, moderate, severe, and extreme (not specific to aircraft type). The CIP product is not a forecast, but a presentation of the current conditions at the time of the analysis.

Supercooled Large Droplet (SLD) icing conditions are characterized by the presence of relatively large, super cooled water droplets indicative of freezing drizzle and freezing rain aloft. SLD threat areas are depicted as magenta dots over the CIP colors.

Displaying Icing data:

- 1) Select the 'Map - Weather Data Link' Page.
- 2) Press the **More WX** Softkey.
- 3) Press the **ICNG** Softkey.
- 4) Select a softkey for the desired altitude level: 1,000 feet up to 30,000 feet. Press the **Next** or **PREV** Softkey to cycle through the altitude softkeys. The **ICNG** Softkey label changes to indicate the altitude selected.

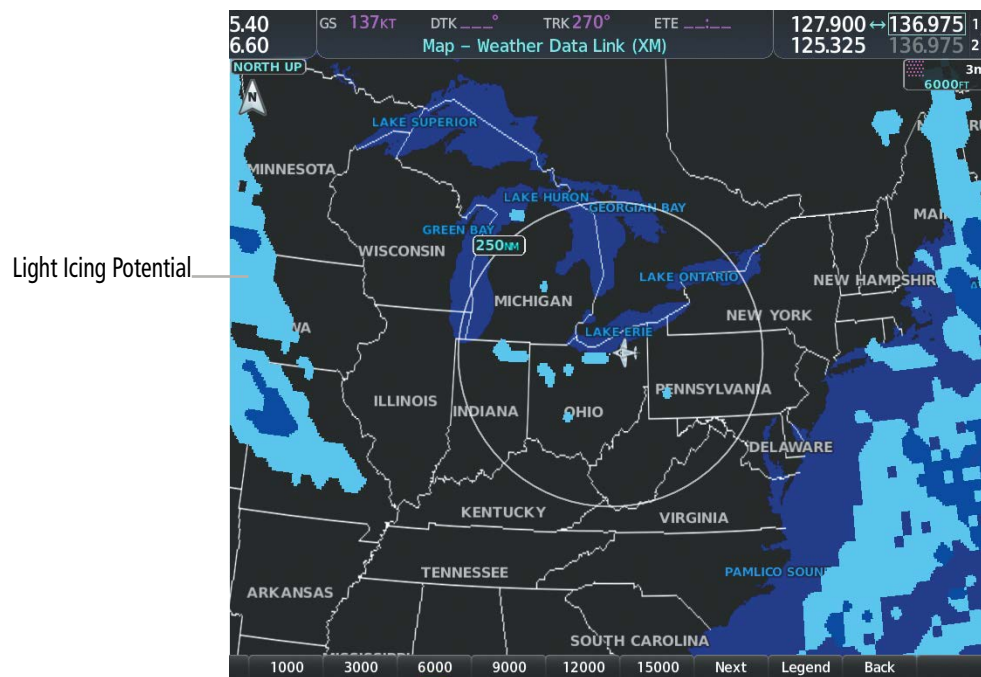


Figure 6-48 Icing Data at 18,000 Feet




Figure 6-49 Icing Potential Legend

TURBULENCE (SIRIUSXM)

The Turbulence weather product identifies the potential for erratic movement of high-altitude air mass associated winds. Turbulence is classified as light, moderate, severe or extreme, at altitudes between 21,000 and 45,000 feet. Turbulence information is intended to supplement AIRMETs, SIGMETs, and PIREPs.

Displaying Turbulence data:

- 1) Select the 'Map - Weather Data Link' Page.
- 2) Press the **More WX** Softkey.
- 3) Press the **TURB** Softkey.
- 4) Select a softkey for the desired altitude: 21,000 feet up to 45,000 feet. Press the **Next** or **PREV** Softkey to cycle through the altitude softkeys. The **TURB** Softkey label changes to indicate the altitude selection.

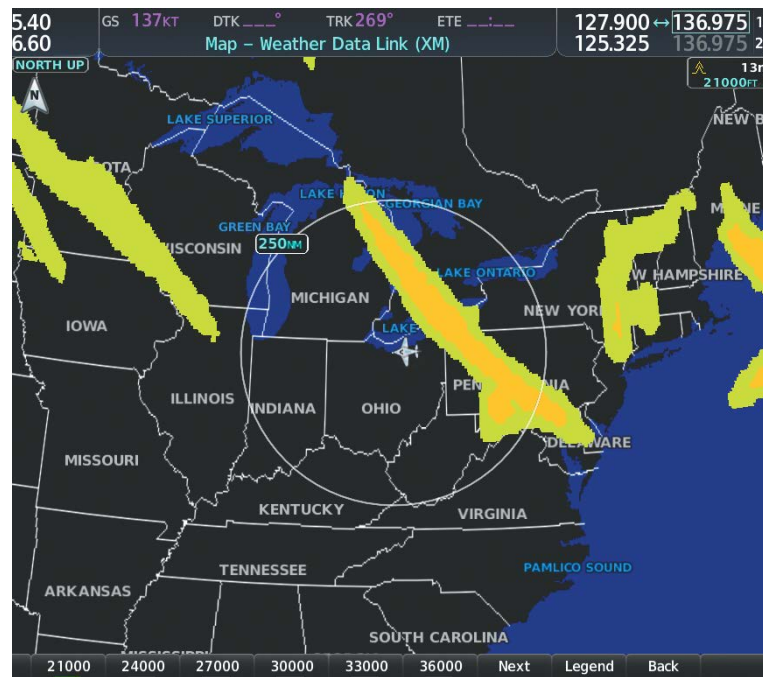


Figure 6-50 Turbulence Weather Product at 21,000 Feet

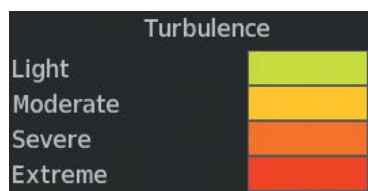


Figure 6-51 Turbulence Legend

PIREPS AND AIREPS



NOTE: AIREPs are only available with the SiriusXM Weather service.

Pilot Weather Reports (PIREPs) are in-flight weather observations collected from pilots. When significant weather conditions are reported or forecast, Air Traffic Control (ATC) facilities are required to solicit PIREPs. A PIREP may contain adverse weather conditions, such as low in-flight visibility, icing conditions, windshear, and turbulence. PIREPs are issued as either Routine (UA) or Urgent (UUA).

Another type of PIREP is an Air Report (AIREP). Commercial airlines typically generate AIREPs.

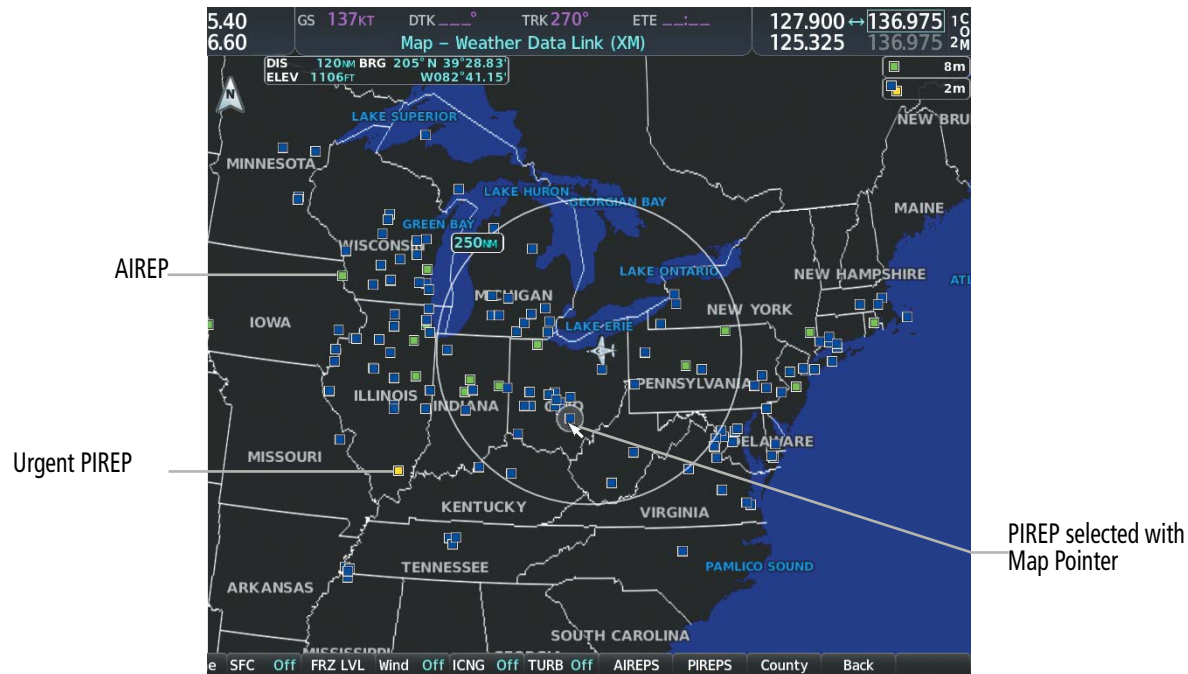


Figure 6-52 PIREPs and AIREPS on the Weather Data Link (XM) Page

Displaying PIREP and AIREP text:

- 1) Select the 'Map - Weather Data Link' Page.
- 2) Select the **More WX** Softkey.
- 3) Select the **PIREPS** or **AIREPS** Softkey. (Note the **AIREPS** Softkey is only available with the SiriusXM Weather service.)
- 4) Press the **Joystick** and pan to the desired weather report. A gray circle will appear around the weather report when it is selected.
- 5) Press the **ENT** Key. The Weather Information Page is shown with PIREP or AIREP text. The data is first displayed in a decoded fashion, followed by the original text. Note the original text may contain additional information not present in the decoded version.
- 6) Use the **FMS** Knob or the **ENT** Key to scroll through the PIREP or AIREP text.
- 7) Push the **FMS** Knob or the **CLR** Key to return to the 'Map - Weather Data Link' Page.

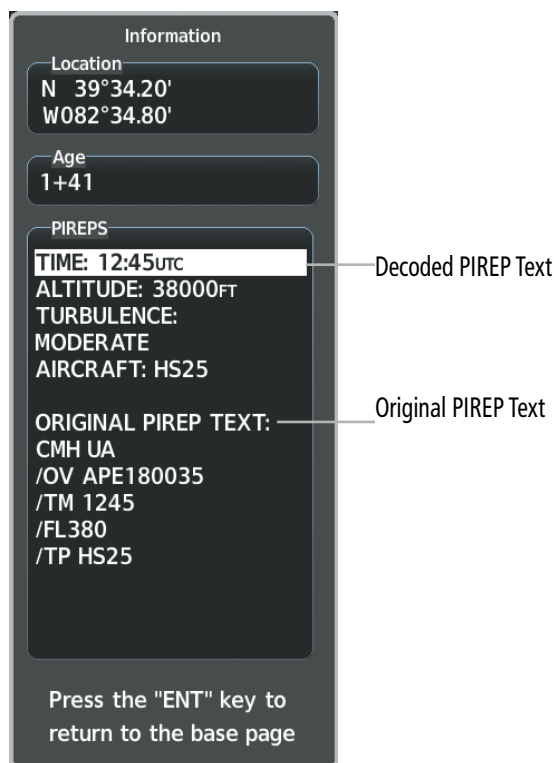


Figure 6-53 PIREP Text on the Weather Data Link (XM) Page

The PIREP color is determined by the type (routine or urgent).




Figure 6-54 AIREPS & PIREPS Legend

TFRS




NOTE: Do not rely solely upon data link services to provide Temporary Flight Restriction (TFR) information. Always confirm TFR information through official sources such as Flight Service Stations or Air Traffic Control.



NOTE: Temporary Flight Restriction (TFR) data from Garmin Connex is only available in the United States (not including any U.S. territories.) Refer to <http://sites.garmin.com/connex> for product coverage information.

In the United States, the FAA issues Temporary Flight Restrictions (TFRs) to designate areas where flight is restricted. TFRs are issued to restrict flight for a variety of reasons including national security, law enforcement, natural disasters, and large sporting events. TFRs may be issued at any time, and TFR data displayed on the system is only intended to supplement official TFR information obtained from Flight Service Stations (FSS), and air traffic control.

The age of TFR data is not shown; however, if TFR data is not available or has expired, the system displays 'TFR N/A' in the upper-left corner of maps on which TFRs can be displayed.

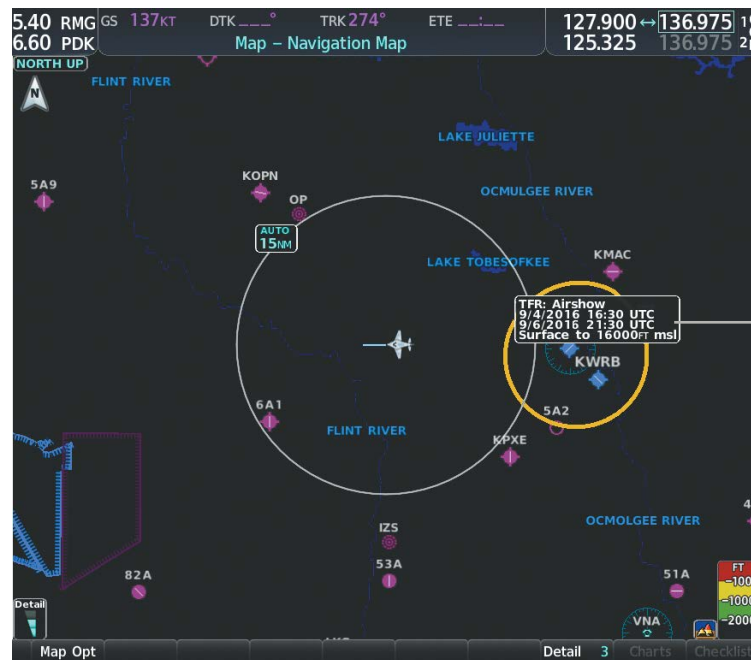

Information for
selected TFR

Figure 6-55 TFR Data on the Weather Data Link (XM) Page

Displaying TFR Data:

- 1) Select the 'Map - Weather Data Link' Page or the 'Map - Navigation Map' Page.
- 2) Press the **Joystick** and pan the map pointer over a TFR to highlight it. The system displays TFR summary information above the map.
- 3) Press the **ENT** Key. The system displays a pop-up menu.
- 4) If necessary, turn the **FMS** Knob to select 'Review Airspaces' and press the **ENT** Key. The system displays the TFR Information window.

- 5) Push the **FMS** Knob or the **CLR** Key to remove the TFR Information window.

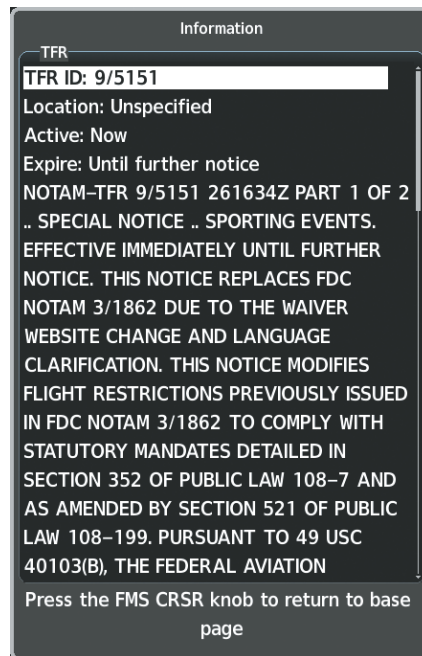


Figure 6-56 Full Text for Selected TFR

The setup menus for the Navigation Map Page control the map range settings above which TFR data is decluttered from the display. If a map range larger than the TFR product map range setting is selected, the TFR product data is removed from the map.

Maps other than the Navigation Map Page use settings based on those selected for the Navigation Map Page.

Setting up and customizing TFR data for maps on which TFR data can be displayed:

- 1) Select the 'Map - Navigation Map' Page.
- 2) Press the **MENU** Key.
- 3) With 'Map Settings' highlighted, press the **ENT** Key.
- 4) Turn the small **FMS** Knob to select the 'Aviation' Group and press the **ENT** Key.
- 5) Turn the large **FMS** Knob to scroll to the TFR product range setting.
- 6) Turn the small **FMS** Knob to scroll through options (Off, range settings).
- 7) Press the **ENT** Key to select an option.
- 8) Push the **FMS** Knob or **CLR** Key to return to the Navigation Map Page with the changed settings.

FIS-B WEATHER STATUS

Additional information about the status of FIS-B weather products is available on the Aux - ADS-B Status Page.

Viewing FIS-B status:

- 1) Turn the large **FMS** Knob to select the Aux Page Group.
- 2) Turn the small **FMS** Knob to select the 'Aux - ADS-B Status' Page.

On the Weather Data Link (FIS-B) page, the pilot can enable/disable the FIS-B weather feature, which includes all FIS-B weather products and related softkeys on various maps.

Enabling/disabling the FIS-B weather feature:

- 1) Select the 'Map - Weather Data Link' Page.
- 2) Press the **MENU** Key.
- 3) Turn the small **FMS** Knob to highlight 'Enable FIS-B Weather' or 'Disable FIS-B Weather', and press the **ENT** Key.



Figure 6-57 Viewing FIS-B Weather Status on the ADS-B Status Page

ABNORMAL OPERATIONS FOR GARMIN CONNEXT WEATHER

If the system cannot complete a Connex Data Request, one or more messages will appear in the Request Status Window.

Weather Request Status Message	Description
Auto requests inhibited Send manual request to reset.	The system has disabled automatic weather data requests due to excessive errors. Automatic weather data requests have stopped. Send a manual weather data request to resume automatic updates.
Auto update retry: ## Seconds	The system will attempt another automatic weather data request after an error occurred during the previous request. Timer counts down until the next automatic request occurs.
Connex Comm Error [1]	A general error has occurred. If the error persists, the system should be serviced.
Connex Comm Error [2]	A communications error has occurred with the GIA. The system should be serviced.
Connex Comm Error [3]	A general error has occurred. If the error persists, the system should be serviced.
Connex Comm Error [4]	This occurs if multiple automatic weather data requests have recently failed, or the GIA is off-line.
Connex Comm Error [5]	This can occur if the Iridium or Garmin Connex services are not accessible. Check Iridium signal strength. If this error persists, the system should be serviced.
Connex Comm Error [6]	A communications error has occurred. If this error persists, the system should be serviced.
Connex Comm Error [7]	A weather data transfer has timed out. Check Iridium signal strength and re-send the data request.
Connex Comm Error [8]	A server error has occurred or invalid data received.
Connex Comm Error [9]	An error occurred while reading or writing data. If the error persists, the system should be serviced.
Connex Login Invalid	There is a problem with the Garmin Connex registration.
Connex Server Temp Inop	The Garmin Connex Weather data server is temporarily out of service, but is expected to return to service in less than 30 minutes.
Connex Server Inop	The Garmin Connex Weather data server will be out of service for at least 30 minutes.
Invalid Coverage Area	The weather data request coverage area does not contain at least one of the following: a waypoint, a flight plan, or a flight plan destination. Verify at least one of the coverage options is enabled (checked) and contains required criteria, then re-send the data request.
No Connex Subscription	The system is not currently subscribed to Garmin Connex services or the access code is incorrect. Verify the access code.
Reduce Request Area	The size of the received weather data has exceeded system memory limits. Reduce the size of the coverage area and issue another Connex Data Request to ensure all available weather data has been received.
Request Canceled	The user has cancelled a Connex Data Request.
Request Failed - Try Again	The weather data request timed-out. Re-send data request.

Table 6-6 Abnormal Garmin Connex Data Request Status Messages

When the system is operating in Reversionary Mode, only those weather products which can be displayed on the PFD maps will be available for display (see Table 6-4 for a list of weather products and their associated map availability).

If manual Connex Data Requests were enabled prior to entering Reversionary Mode, no new weather data will be retrieved while operating in Reversionary Mode. If automatic Connex Data Requests were enabled prior to Reversionary Mode operation, the system will continue the automatic data requests in Reversionary Mode (provided automatic requests have not been inhibited due to a system error).

6.2 STORMSCOPE LIGHTNING DETECTION SYSTEM



WARNING: Do not rely on information from the lightning detection system display as the sole basis for hazardous weather avoidance. Range limitations and interference may cause the system to display inaccurate or incomplete information. Refer to documentation from the lightning detection system manufacturer for detailed information about the system.



NOTE: Stormscope lightning information cannot be displayed simultaneously on the same map as lightning information from data link lightning sources.

The system can display L-3 WX-500 Stormscope lightning detection system information on the Stormscope Page, and as an overlay on navigation maps. The system uses the symbols shown in the following table to depict lightning strikes and cells based on the age of the information.

Lightning Age	Symbol
Strike is less than 6 seconds old	
Strike is between 6 and 60 seconds old	
Strike is between 1 and 2 minutes old	
Strike is between 2 and 3 minutes old	

Table 6-7 Lightning Age and Symbols

USING THE STORMSCOPE PAGE

On the Stormscope Page, lightning information can be displayed at the ranges of 25 nm, 50 nm, 100 nm, and 200 nm.

Adjusting the Stormscope Map Range:

- 1) Turn the large **FMS** Knob to select the Map Page Group.
- 2) Turn the small **FMS** Knob to select the Stormscope Page.
- 3) Turn the **Joystick** clockwise to increase the map range or counter-clockwise to decrease the map range.

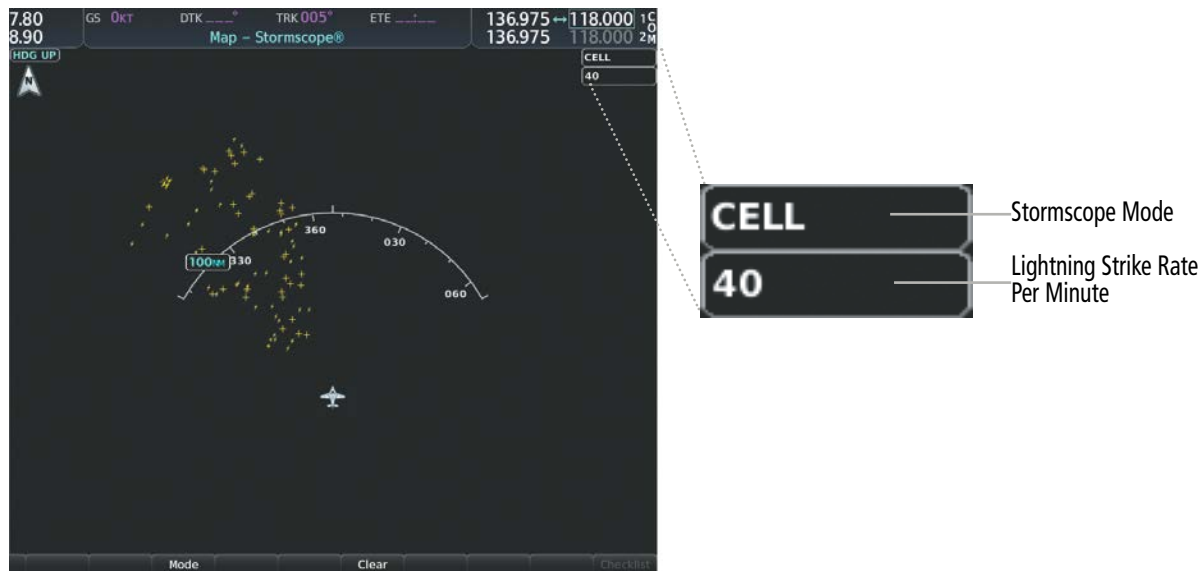


Figure 6-58 Stormscope Page with Cell Mode Selected

Selecting 'cell' or 'strike' mode:

- 1) Select the 'Map - Stormscope®' Page.
- 2) Press the **Mode** Softkey. The **Cell** and **Strike** softkeys are displayed.
- 3) Press the **Cell** Softkey to display 'CELL' data or select the **Strike** Softkey to display 'STRIKE' data. 'CELL' or 'STRIKE' is displayed in the mode box in the upper right corner of the Stormscope Page.
- 4) Press the **Back** Softkey to return to the top level softkeys for the Stormscope Page.

Or:

- 1) Select the 'Map - Stormscope®' Page.
- 2) Press the **MENU** Key to display the Stormscope Page Menu. Either 'Cell Mode' or 'Strike Mode' is highlighted in cyan to indicate the mode to be selected.
- 3) Press the **ENT** Key to select the highlighted mode and remove the menu. To remove the menu without changing modes, press the **MENU** Key or the **CLR** Key, or push the **FMS** Knob.

If heading input is lost, strikes and/or cells must be cleared manually after the execution of each turn. This is to ensure the strike and/or cell positions are depicted accurately in relation to the nose of the aircraft. Clearing Stormscope lightning on any map clears this information from all displays on the system.

Manually clearing Stormscope cell or strike information:

- 1) Select the 'Map - Stormscope®' Page.
- 2) Press the **Clear** Softkey.

Or:

- a) Press the **MENU** Key.
- b) Turn the **FMS** Knob to highlight 'Clear Lightning Data', then press the **ENT** Key.

Or:

- 1) Select the 'Map - Navigation Map' Page.
- 2) Press the **MENU** Key.
- 3) Turn the **FMS** Knob to highlight 'Clear Stormscope® Lightning', then press the **ENT** Key.

Displaying Stormscope information on MFD navigation maps:

- 1) Press the **Map Opt** Softkey.
- 2) Press the **STRMSCP** Softkey.

Displaying Stormscope information on PFD maps:

- 1) On the PFD, press the **Map/HSI** Softkey.
- 2) Press the **Lightning** Softkey.
- 3) Press the **STRMSCP** Softkey.

SETTING UP STORMSCOPE ON THE NAVIGATION MAP

Setting up Stormscope options on the Navigation Map:

- 1) On the 'Map - Navigation Map' Page, press the **MENU** Key.
- 2) With 'Map Settings' selected, press the **ENT** Key.
- 3) Turn the small **FMS** Knob to display the group selection window. Turn the small **FMS** Knob to select 'Weather', and press the **ENT** Key.
- 4) Turn the large **FMS** Knob to highlight and move between the product selections.
- 5) When an item is highlighted, turn the small **FMS** Knob to select the option.
- 6) Press the **ENT** Key.
- 7) Push the **FMS** Knob to return to the Navigation Map Page.

The following options are available:

- » Stormscope On/Off field – Enables/disables the display of Stormscope lightning symbols.
- » Stormscope maximum display range – Selects the maximum map range to display Stormscope symbols. Stormscope data is removed when a map range greater than the STRMSCP SMBL value is selected.
- » Stormscope Mode – Selects the Cell or Strike mode of lightning activity. Cell mode identifies clusters or cells of electrical activity. Strike mode indicates the approximate location of lightning strikes.

CELL AND STRIKE MODE ON THE NAVIGATION MAP

On the Navigation Map, cell mode identifies cells of lightning activity. Stormscope identifies clusters of electrical activity that indicate cells. Strike mode indicates the approximate location of lightning strikes.

Selecting the 'cell' or 'strike' mode on the Navigation Map:

- 1) Press the **MENU** Key.
- 2) With 'Map Settings' selected, press the **ENT** Key.
- 3) Turn the **FMS** Knob to select the 'Weather' group and press the **ENT** Key.
- 4) Turn the large **FMS** Knob to select the Stormscope Mode field.
- 5) Turn the small **FMS** Knob to change between 'Cell' and 'Strike' options. When the desired item is selected, press the **ENT** Key.
- 6) Push the **FMS** knob to return to the 'Map - Navigation Map' Page.

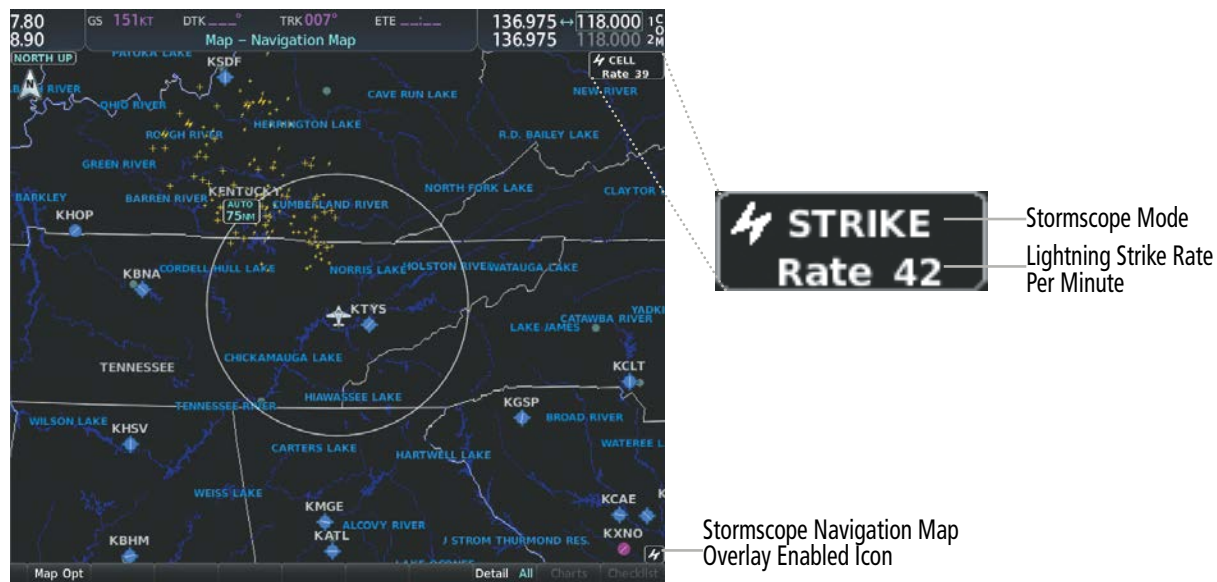


Figure 6-59 Navigation Map Page with Stormscope Lightning Data

If heading input is lost, strikes and/or cells must be cleared manually after the execution of each turn. This is to ensure the strike and/or cell positions are depicted accurately in relation to the nose of the aircraft.

Manually clearing Stormscope data on the Navigation Map:

- 1) Press the **MENU** Key.
- 2) Turn the **FMS** Knob to highlight 'Clear Stormscope® Lightning'.
- 3) Press the **ENT** Key.

Selecting a Stormscope range on the Navigation Map:

- 1) Press the **MENU** Key.
- 2) With 'Map Settings' highlighted, press the **ENT** Key.
- 3) Turn the **FMS** Knob to highlight the select the 'Weather' group, and press the **ENT** Key.
- 4) Turn the large **FMS** Knob to highlight the Stormscope maximum map display range distance.
- 5) Turn the small **FMS** Knob to select the Stormscope maximum map display range distance.
- 6) Press the **ENT** Key.
- 7) Push the **FMS** Knob to return to the 'Map - Navigation Map' Page.

To change the display range on the Navigation Map Page, turn the **Joystick** clockwise to increase the map range or counter-clockwise to decrease the map range.

6.3 TERRAIN DISPLAYS



WARNING: Do not use terrain avoidance displays as the sole source of information for maintaining separation from terrain and obstacles. Garmin obtains terrain and obstacle data from third party sources and cannot independently verify the accuracy of the information.



NOTE: Terrain data is not displayed when the aircraft is outside of the installed terrain database coverage area.



NOTE: Terrain and obstacle alerting is not available north of 89° North latitude and south of 89° South latitude. This is due to limitations present within the Terrain database and the system's ability to process the data representing the affected areas.



NOTE: Terrain and obstacle alerting requires the Terrain-SVT option included with Garmin SVT. No terrain or obstacle alerting occurs for the Terrain Proximity feature.

The terrain system increases situational awareness and aids in reducing controlled flight into terrain (CFIT) and obstacles.

One of the following terrain systems is installed on this aircraft:

- Terrain Proximity
- Terrain-SVT (included with the Garmin SVT option) is not installed; refer to the Flight Instruments section for more information about Garmin SVT.)

The installed terrain system provides color indications on map displays when terrain or obstacles are within a certain altitude threshold from the aircraft. Terrain-SVT furthermore provides advisory visual annunciations and voice alerts to indicate the presence of threatening terrain or obstacles relevant to the projected flight path. This alerting capability is **not** present in the Terrain Proximity feature. The terrain system requires the following for proper operation:

- Valid 3-D GPS position
- Valid terrain and obstacle databases

The terrain system uses terrain and obstacle information supplied by government sources. Terrain information is based on terrain elevation information in a database that may contain inaccuracies. Individual obstructions may be shown if available in the database. Garmin verifies the data to confirm accuracy of the content. However, the displayed information should never be understood as being all-inclusive and data may still contain inaccuracies.

The terrain system uses information provided from the GPS receiver to provide a horizontal position and altitude. GPS altitude is derived from satellite measurements. GPS altitude is then converted to the height above geodetic sea level (GSL), which is the height above mean sea level (MSL) calculated geometrically. The system uses GSL altitude to determine alerts for the Terrain-SVT system. GSL altitude accuracy is affected by satellite geometry, but is not subject to variations in pressure and temperature that normally affect pressure altitude sensors. GSL altitude does not require local altimeter settings to determine MSL altitude. It is a widely-used MSL altitude source. Therefore, GSL altitude provides a highly accurate and reliable MSL altitude source to calculate terrain and obstacle alerts.

The terrain and obstacle databases used by the terrain system are referenced to MSL. Using the GPS position and GSL altitude, terrain system displays a 2-D picture of the surrounding terrain and obstacles relative to the position and altitude of the aircraft. Furthermore, for the Terrain-SVT, the system uses the GPS position and GSL altitude to calculate and “predict” the aircraft’s flight path in relation to the surrounding terrain and obstacles. In this manner, the Terrain-SVT can provide advanced alerts of predicted dangerous terrain conditions.


Baro-corrected altitude (or indicated altitude) is derived by adjusting the altimeter setting for local atmospheric conditions. The most accurate baro-corrected altitude can be achieved by frequently updating the altimeter setting to the nearest reporting station along the flight path. However, because actual atmospheric conditions seldom match the standard conditions defined by the International Standard Atmosphere (ISA) model (where pressure, temperature, and lapse rates have fixed values), it is common for the baro-corrected altitude (as read from the altimeter) to differ from the GSL altitude. This variation results in the aircraft’s GSL altitude differing from the baro-corrected altitude.

RELATIVE TERRAIN SYMBOLOGY

The terrain system uses colors and symbols to represent terrain and obstacles (with heights greater than 200 feet above ground level, AGL) present in the databases relative to aircraft altitude. The system dynamically adjusts these colors as the aircraft altitude changes, and after takeoff and landing.

While the aircraft is on the ground, the system displays relative terrain 400 feet or more above the aircraft altitude using red, and terrain at less than 400 feet above aircraft altitude using black, as shown on the On-Ground Legend. When the aircraft is in the air, the system displays relative terrain information using red, yellow, green, and black, as shown on the In-Air Legend. As the aircraft transitions from on-ground to in-air, or from in-air to on-ground, the display of relative terrain momentarily fades into the corresponding colors. For Terrain-SVT system, if an alert occurs, the relative terrain colors transition to the In-Air Legend if in the On-Ground Legend was shown in order to provide the flight crew with the most information possible.

On-Ground Legend



In-Air Legend




Figure 6-60 Relative Terrain Legend

The following figure shows the relative terrain coloring for the Terrain Proximity system.

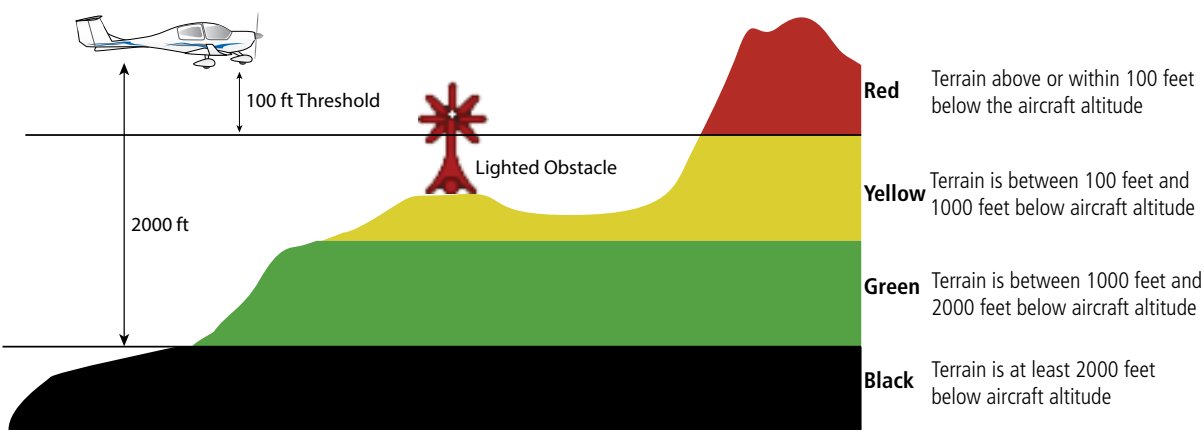


Figure 6-61 Terrain Altitude/Color Correlation for Terrain Proximity

The following figure shows relative terrain coloring for the Terrain-SVT and TAWS-B systems.

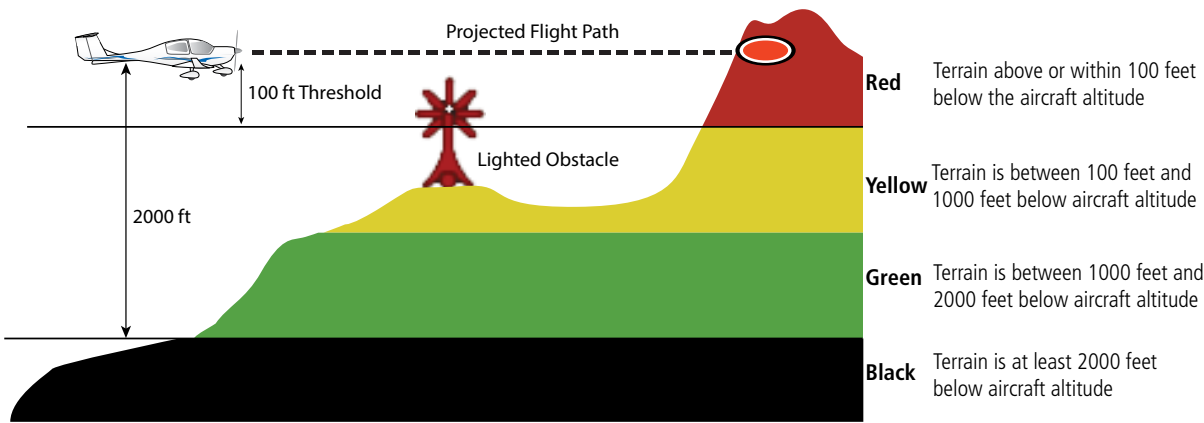


Figure 6-62 Terrain Altitude/Color Correlation for the Terrain-SVT System

The following tables show the relative obstacle coloring used by the terrain systems.

Unlighted Obstacle		Lighted Obstacle		Obstacle Location
< 1000' AGL	> 1000' AGL	< 1000' AGL	> 1000' AGL	
				Red obstacle is above or within 100 ft below the aircraft altitude
				Yellow obstacle is between 100 ft and 1000 ft below the aircraft altitude
				White obstacle is more than 1000 ft below aircraft altitude

Table 6-8 Relative Obstacle Symbols and Colors

Unlighted Wind Turbine Obstacle	Lighted Wind Turbine Obstacle	Wind Turbine Obstacle Location
		Red obstacle is above or within 100 ft below the aircraft altitude
		Yellow obstacle is between 100 ft and 1000 ft below the aircraft altitude
		White obstacle is more than 1000 ft below aircraft altitude

Table 6-9 Wind Turbine Obstacles and Colors

The Terrain-SVT system shows potential impacts areas for terrain and obstacles using yellow and red as shown in the following table.

Potential Impact Area Examples	Alert Type	Example Annunciation
 or 	Warning	
 or 	Caution	

Table 6-10 Terrain-SVT and TAWS-B Potential Impact Area with Annunciations

The Map - Terrain Proximity or Terrain-SVT Page is the principal map page for viewing terrain information. Terrain and obstacle information can be displayed on the following maps and pages:

- PFD Maps
- Navigation Map Page
- Terrain Proximity/Terrain-SVT Page
- Trip Planning Page
- Flight Plan Page

Displaying terrain and obstacle information (MFD maps other than the terrain page):

- 1) Press the **Map Opt** Softkey (for the PFD Inset Map, press the **Map/HSI** Softkey).
- 2) Press the **TER** Softkey to cycle through a terrain option with each press. The selected mode is displayed in cyan: Off, Topo, REL. Press the **TER** Softkey as needed until 'REL' is displayed on the softkey.

Displaying relative terrain information on PFD Inset Map or HSI Map

- 1) Press the **Map/HSI** Softkey.
- 2) Press the **Rel Ter** Softkey.

When relative terrain is selected on maps other than the terrain page, an icon to indicate the feature is enabled for display and a legend for the relative terrain colors are shown.

The Navigation Map Page Setup Menu provides a means in addition to the softkey for enabling/disabling display of terrain and obstacles. The setup menu also controls the map range settings above which terrain and obstacle data are decluttered from the display. If a map range larger than the map range setting is selected, the data is removed from the map.

Terrain information can be selected for display independently of obstacle data; however, obstacles recognized by Terrain Proximity as yellow or red are shown when terrain is selected for display and the map range is within the setting limit.

Maps besides the Terrain Proximity Page use settings based on those selected for the Navigation Map Page. The maximum display ranges for obstacles on each map are dependent on the range setting made for the Navigation Map.

Customizing terrain and obstacle display on the Navigation Map Page:

- 1) Select the Navigation Map Page.
- 2) Press the **MENU** Key.
- 3) With 'Map Settings' highlighted, press the **ENT** Key.
- 4) Turn the small **FMS** Knob to select the 'Map' Group and press the **ENT** Key.
- 5) Turn the large **FMS** Knob or press the **ENT** Key to scroll through product selections.
 - Terrain Display - Turns the display of relative ('REL') terrain data on or off and sets maximum range at which terrain is shown.
 - Point Obstacle— Turns the display of obstacle data on or off and sets maximum range at which obstacles are shown
- 6) Turn the small **FMS** Knob to scroll through options for each product (On/Off, range settings, etc.).
- 7) Press the **ENT** Key to select an option.
- 8) Push the **FMS** Knob or **CLR** Key to return to the 'Map - Navigation Map' Page with the changed settings.

Additional information about obstacles can be displayed by panning over the display on the map. The map panning feature is enabled by pressing the **Joystick**. The map range is adjusted by turning the **Joystick**. If the map range is adjusted while panning is enabled, the map is re-centered on the Map Pointer.



Figure 6-63 Terrain Information on the Navigation Map Page

TERRAIN PAGE

The 'Map - Terrain Proximity', or 'Map - Terrain-SVT' Page is specialized to show terrain, and obstacle in relation to the aircraft's current altitude, without clutter from the basemap. This page is the principal page for viewing terrain information. Aviation data (airports, VORs, and other NAVAIDs) can be enabled for reference.

For Terrain-SVT system only, this page also shows potential impact areas. If an obstacle and the projected flight path of the aircraft intersect, the display automatically adjusts to a map range if necessary to emphasize the display of the potential impact area.

Aircraft orientation on this map is always heading up unless there is no valid heading, in which case the orientation is track up. Map range is adjustable with the **Joystick** from 1 to 200 nm, as indicated by the map range rings (or arcs).

Displaying the terrain page:

- 1) Turn the large **FMS** Knob to select the Map Page Group.
- 2) Turn the small **FMS** Knob to select the 'Map - Terrain Proximity Page/Terrain-SVT' Page.

Showing/hiding aviation information on the terrain page:

- 1) Press the **MENU** Key.
- 2) Select 'Show Aviation Data' or 'Hide Aviation Data' (choice dependent on current state) and press the ENT Key.

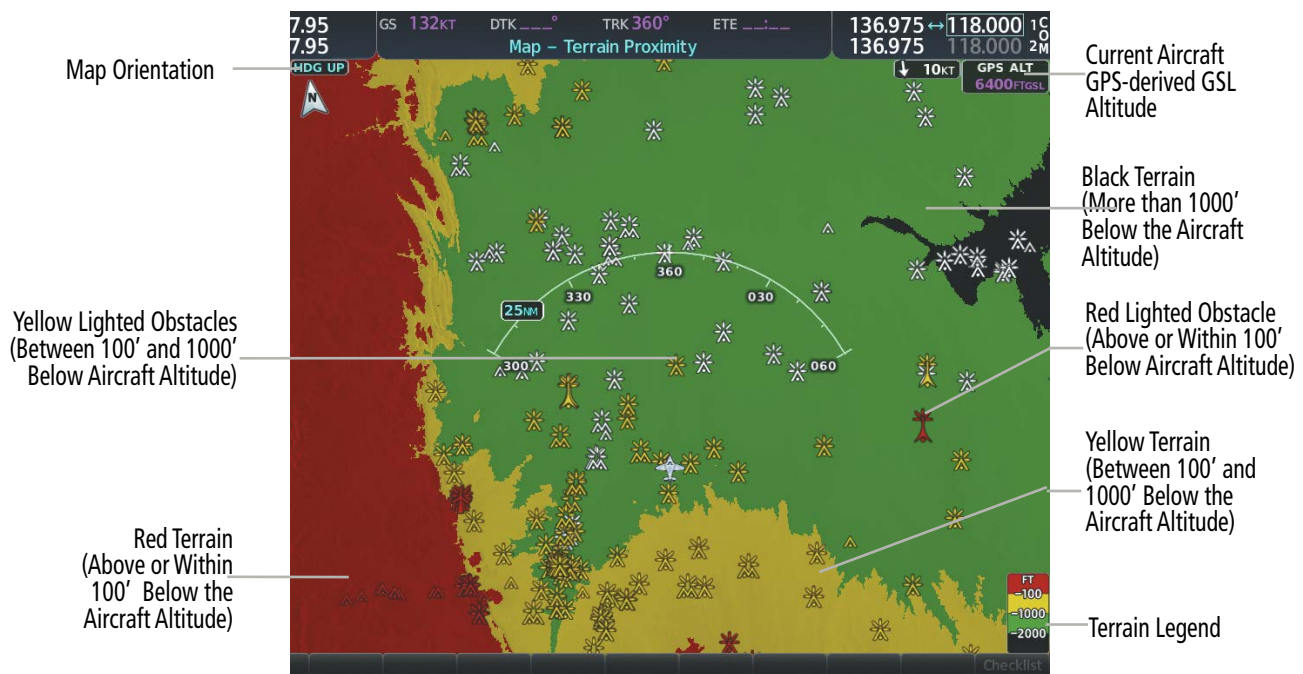


Figure 6-64 Terrain Proximity Page

TERRAIN-SVT ALERTING DISPLAYS

Alerts are issued when flight conditions meet parameters that are set within Terrain-SVT software algorithms. Terrain alerts typically employ a CAUTION or a WARNING alert severity level, or both. When an alert is issued, visual annunciations are displayed and voice alerts are simultaneously issued.

When an alert is issued, annunciations appear on the PFD and MFD. The terrain alert annunciation appears to the left of the Selected Altitude box on the PFD, and bottom left on the MFD on the Terrain-SVT Page. If the terrain page is not displayed at the time, a pop-up alert appears on the MFD. To acknowledge the pop-up alert:

- Press the **CLR** Key (returns to the currently viewed page), or
- Press the **ENT** Key (accesses the Terrain-SVT Page)

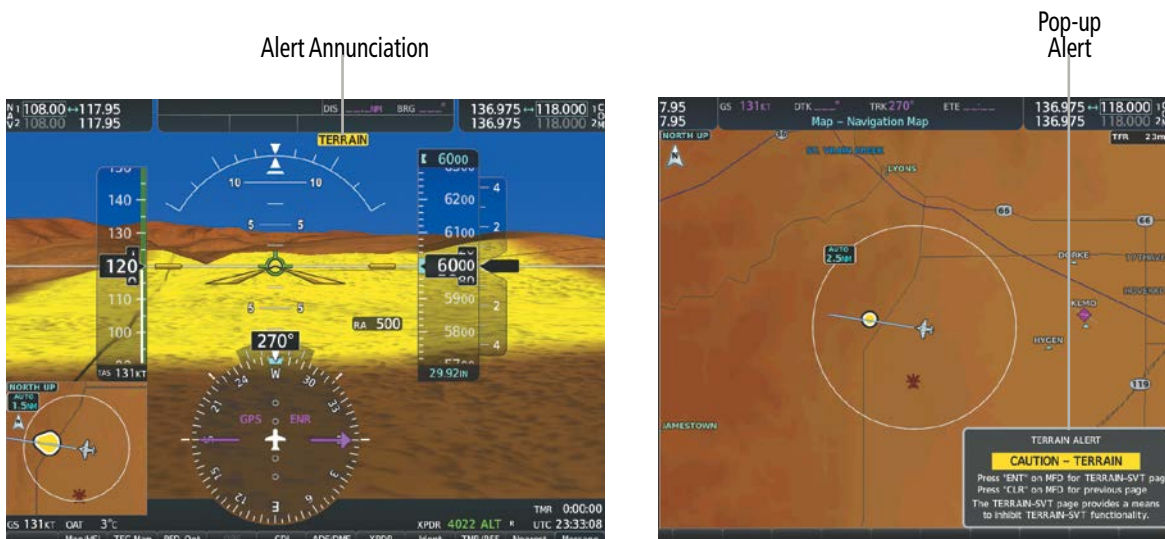


Figure 6-65 Terrain-SVT Alert Annunciations



**Figure 6-66 Navigation Map Page
(After Terrain-SVT Pop-up Alert Acknowledgment)**

The following table lists the possible Terrain-SVT alerts.

Alert Type	PFD/Terrain-SVT Annunciation	MFD Pop-Up Alert (except Terrain-SVT Page)	Voice Alert
Reduced Required Terrain Clearance Warning (RTC)	TERRAIN	WARNING - TERRAIN	"Warning; Terrain, Terrain"
Imminent Terrain Impact Warning (ITI)	TERRAIN	WARNING - TERRAIN	"Warning; Terrain, Terrain"
Reduced Required Obstacle Clearance Warning (ROC)	TERRAIN	WARNING - OBSTACLE	"Warning; Obstacle, Obstacle"
Imminent Obstacle Impact Warning (IOI)	TERRAIN	WARNING - OBSTACLE	"Warning; Obstacle, Obstacle"
Reduced Required Terrain Clearance Caution (RTC)	TERRAIN	CAUTION - TERRAIN	"Caution; Terrain, Terrain"
Imminent Terrain Impact Caution (ITI)	TERRAIN	CAUTION - TERRAIN	"Caution; Terrain, Terrain"
Reduced Required Obstacle Clearance Caution (ROC)	TERRAIN	CAUTION - OBSTACLE	"Caution; Obstacle, Obstacle"
Imminent Obstacle Impact Caution (IOI)	TERRAIN	CAUTION - OBSTACLE	"Caution; Obstacle, Obstacle"

Table 6-11 Terrain-SVT Alerts Summary

FORWARD LOOKING TERRAIN AVOIDANCE

The Forward Looking Terrain Avoidance (FLTA) feature of Terrain-SVT compares the projected flight path as derived from GPS data with terrain features and obstacles from the terrain and obstacle databases. The system issues FLTA alerts when the projected flight path conflicts with terrain or obstacles.

The projected flight path is a calculated area ahead of, to the sides, and below the aircraft. The size of the projected flight path varies based on factors including ground speed (the path ahead is larger when the ground speed is higher), whether the aircraft is level, turning, or descending, and the proximity to the nearest runway along the current track. As the aircraft approaches the runway, the projected flight path becomes narrower until the system automatically disables FLTA alerts or the pilot manually inhibits them.

There are two types of FLTA alerts, Reduced Required Terrain/Obstacle Clearance (RTC or ROC respectively) and Imminent Terrain/Obstacle Impact (ITI or IOI respectively).

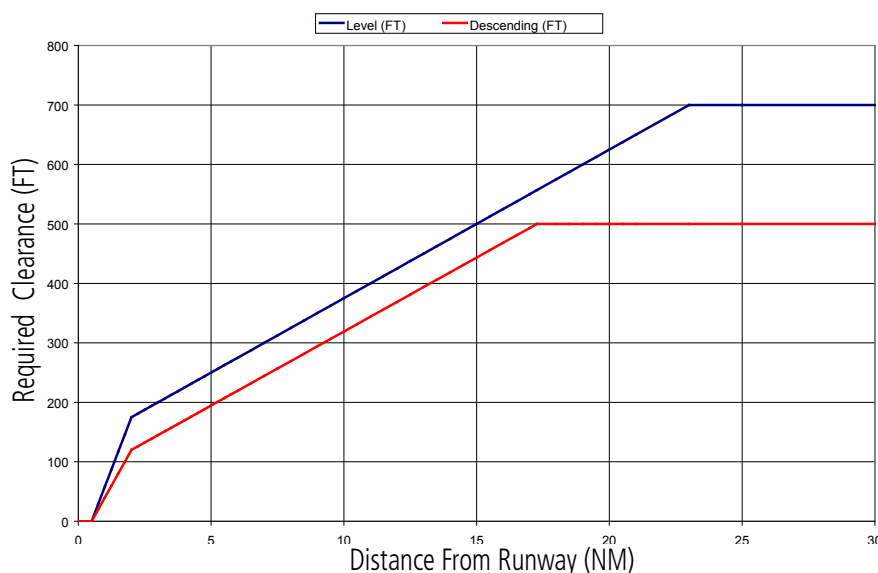


Figure 6-67 FLTA Alert Minimum Terrain and Obstacle Clearance Values

The system automatically disables FLTA alerts when the aircraft is less than 200 feet above the destination runway elevation while within 0.5 nm of the approach runway or the aircraft is between runway ends.

When Terrain-SVT FLTA alerts are manually inhibited, the annunciation is shown on the PFD and in the MFD for maps displaying relative terrain

Terrain-SVT System

TER INH

Figure 6-68 FLTA Alerting is Inhibited when Annunciation is displayed

SYSTEM STATUS

TERRAIN-SVT

During power-on, Terrain-SVT conducts a self-test of its visual annunciations and voice alerts. An voice alert is issued at test completion.

Terrain-SVT continually monitors several system-critical items such as database validity, hardware status, and GPS status. If the terrain/obstacle database is not available, the system issues the voice alert “*Terrain System Failure*” along with the ‘TER FAIL’ alert annunciation.

Terrain-SVT requires a 3-D GPS navigation solution along with specific vertical accuracy minimums. Should the navigation solution become degraded or if the aircraft is out of the database coverage area, the annunciation ‘TER N/A’ is generated in the annunciation window and on the Terrain-SVT Page. The voice alert “*Terrain System Not Available*” is generated. When sufficient GPS signal is returns and the aircraft is within the database coverage area, the voice alert “*Terrain System Available*” is generated.

Alert Type	PFD/Terrain-SVT Annunciation	Terrain-SVT Page Center Banner Annunciation	Voice Alert
System Test in Progress	TER TEST	TERRAIN TEST	None
System Test Pass	None	None	“Terrain System Test OK”
Terrain Alerting Inhibited	TER INH	None	None
No GPS position	TER N/A	NO GPS POSITION	“Terrain System Not Available” ¹
Excessively degraded GPS signal; or Out of database coverage area	TER N/A	None	“Terrain System Not Available” ¹
Terrain System Test Fail; Terrain or Obstacle database unavailable or invalid; Invalid software configuration; or System audio fault	TER FAIL	TERRAIN FAIL	“Terrain System Failure”
MFD Terrain or Obstacle database unavailable or invalid, and Terrain-SVT operating with PFD Terrain or Obstacle databases	None	TERRAIN DATABASE FAILURE	None

¹ “*Terrain System Available*” will be heard when sufficient GPS signal is received, or Terrain database coverage area re-entered.

Table 6-12 Terrain-SVT System Status Annunciations

6.4 TRAFFIC INFORMATION SERVICE (TIS)



WARNING: Do not rely solely upon the display of traffic information for collision avoidance maneuvering. The traffic display does not provide collision avoidance resolution advisories and does not under any circumstances or conditions relieve the pilot's responsibility to see and avoid other aircraft.



NOTE: TIS is available only when the aircraft is within the service volume of a TIS-capable terminal radar site. Aircraft without an operating transponder are invisible to both Traffic Advisory Systems (TAS), Traffic Alert and Collision Avoidance Systems (TCAS) and TIS. Aircraft without altitude reporting capability are shown without altitude separation data or climb descent indication.



NOTE: Mode S TIS is disabled if another traffic system such as TAS or Automatic Dependent Surveillance-Broadcast (ADS-B) is installed.

Traffic Information Service (TIS) is designed to help in detection and avoidance of other aircraft. TIS uses the Mode S transponder for the traffic data link. TIS receives traffic information from ground stations, and is updated every five seconds. The system displays up to eight traffic symbols within a 7.5-nm radius, from 3000 feet below to 3500 feet above the requesting aircraft. The system displays TIS traffic with the symbology shown in the following table.

TIS Symbol	Description
	Non-Threat Traffic
	Traffic Advisory (TA)
	Traffic Advisory Off Scale

Table 6-13 TIS Traffic Symbols

Traffic Advisories (TA) alert the crew to intruding aircraft. When traffic meets the advisory criteria for the TA, a solid amber circle symbol appears. A TA which is detected but is outside the range of the map on which traffic is displayed are indicated with a message in the lower left corner of the map.

TIS also provides a vector line showing the direction in which the traffic is moving, to the nearest 45°. Traffic information for which TIS is unable to determine the bearing (non-bearing traffic) is displayed in the center of the Traffic Map Page or in a banner at the lower left corner of maps other than the Traffic Map Page on which traffic can be displayed.

The altitude difference between the requesting aircraft and other intruder aircraft is displayed above/below the traffic symbol in hundreds of feet. If the other aircraft is above the requesting aircraft, the altitude separation appears above the traffic symbol; if below, the altitude separation appears below. Altitude trend is displayed as an up/down arrow (for speeds greater than 500 fpm in either direction) to the right of the target symbol. Traffic symbols for aircraft without altitude reporting capability appear without altitude separation or climb/descent information.

DISPLAYING TRAFFIC DATA

The 'Map - Traffic Map' Page is the principal map page for viewing traffic information. Traffic information can also be displayed on the following other maps for additional reference on the MFD when the traffic TIS is operating:

- PFD Maps
- Navigation Map Page
- Traffic Map Page
- Trip Planning Page
- Nearest Pages
- Active Flight Plan Page

Traffic information can also be displayed on the PFD when the Terrain-SVT option is installed and enabled. See the Additional Features Section for details.

Enabling/disabling traffic overlays (MFD navigation maps):

- 1) Press the **Map Opt** Softkey.
- 2) Press the **Traffic** Softkey. Traffic is now displayed on the navigation map.

When traffic is selected on maps other than the 'Map - Traffic Map' Page, an icon is shown to indicate the feature is enabled for display.



Figure 6-69 TIS Traffic on Navigation Map Page

The 'Map - Navigation Map' Page Setup Menu provides a means in addition to the softkey for enabling/disabling display of traffic. The setup menu also controls the map range settings above which traffic data (symbols and labels) are decluttered from the display. If a map range larger than the map range setting is selected, the data is removed from the map. Maps besides the Traffic Map Page use settings based on those selected for the Navigation Map Page.

Enabling/disabling traffic information on the PFD Inset Map or HSI Map:

- 1) On the PFD, press the **Map/HSI** Softkey.
- 2) Press the **Traffic** Softkey to enable/disable the display traffic information on the Inset Map or HSI Map.

Customizing traffic display on the Navigation Map Page:

- 1) Select the 'Map - Navigation Map' Page.
- 2) Press the **MENU** Key.
- 3) With 'Map Settings' highlighted, press the **ENT** Key.
- 4) Turn the small **FMS** Knob to select the 'Traffic' Group and press the **ENT** Key.
- 5) Turn the large **FMS** Knob or press the **ENT** Key to scroll through product selections.
 - Traffic – Turns the display of traffic data on or off
 - Traffic Mode – Selects the traffic mode for display; select from:
 - All Traffic - Displays all traffic
 - TA/PA - Traffic Alerts and Proximity Alerts.
 - TA Only - Displays Traffic Alerts only
 - Traffic Symbols – Selects the maximum range at which traffic symbols are shown
 - Traffic Labels – Selects the maximum range at which traffic labels are shown (with the option to turn off)
- 6) Turn the small **FMS** Knob to scroll through options for each product (On/Off, range settings, etc.).
- 7) Press the **ENT** Key to select an option.
- 8) Push the **FMS** Knob or **CLR** Key to return to the Navigation Map Page with the changed settings.

TRAFFIC MAP PAGE

The 'Map - Traffic Map' Page is specialized to show surrounding TIS traffic data in relation to the aircraft's current position and altitude, without clutter from the basemap. Aircraft orientation on this map is always heading up unless there is no valid heading. Map range is adjustable with the **Joystick** from 2 to 12 nm, as indicated by the map range rings.

The traffic mode is annunciated in the upper left corner of the 'Map - Traffic Map' Page. When the aircraft is on the ground, TIS automatically enters Standby Mode. Once the aircraft is airborne, TIS switches from Standby to Operating Mode and the system begins to display traffic information. Refer to the System Status discussion for more information.

Displaying traffic on the Traffic Map Page:

- 1) Turn the large **FMS** Knob to select the Map Page Group.
- 2) Turn the small **FMS** Knob to select the 'Map - Traffic Map' Page.
- 3) Confirm TIS is in Operating Mode:
 - Press the **TIS OPER** Softkey to begin displaying traffic.
 - Or:**
 - a) Press the **MENU** Key.
 - b) Select 'Operate Mode' (shown if TIS is in Standby Mode) and press the **ENT** Key.

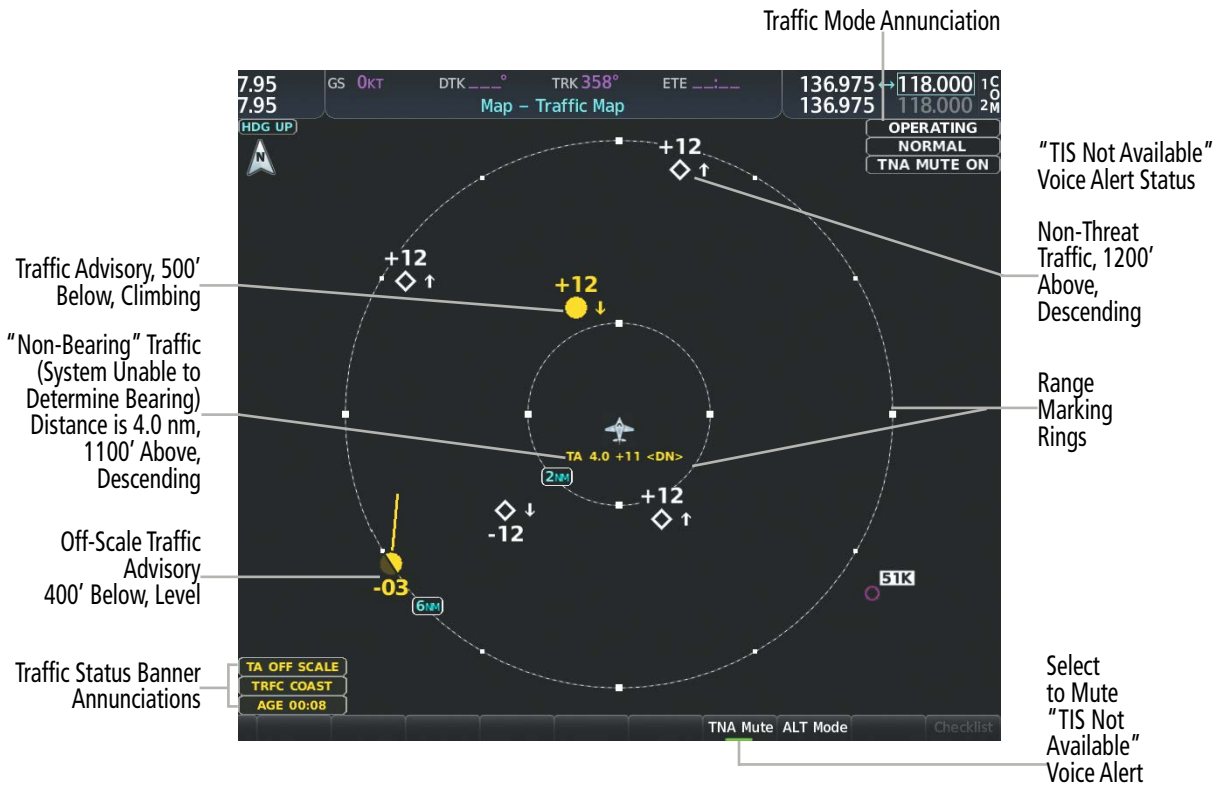


Figure 6-70 Traffic Map Page

TIS ALERTS

When the number of TAs on the 'Map - Traffic Map' Page increases from one scan to the next, the following occur:

- A single "Traffic" voice alert is generated.
- A 'TRAFFIC' Annunciation appears to the right of the airspeed tape, flashes for five seconds, and remains displayed until no TAs are detected in the area.
- The PFD Inset Map or HSI Map is automatically displayed with traffic.

To reduce the number of nuisance alerts due to proximate aircraft, the "Traffic" voice alert is generated only when the number of TAs increases. For example, when the first TA is displayed, a voice and visual annunciation are generated. As long as a single TA remains on the display, no additional voice alerts are generated. If a second TA appears on the display or if the number of TAs initially decreases and then subsequently increases, another voice alert is generated.



Figure 6-71 Traffic Annunciation (PFD)

A “TIS Not Available” (TNA) voice alert is generated when the TIS service becomes unavailable or is out of range. TIS may be unavailable in the radar coverage area due to the following:

- Radar site TIS Mode S sensor is not operational or is out of service
- Traffic or requesting aircraft is beyond the maximum range of the TIS-capable Mode S radar site.
- Traffic or requesting aircraft is above the radar site in the cone of silence and out of range of an adjacent site.
- Traffic or requesting aircraft is below radar coverage. In flat terrain, the coverage extends from about 3000 feet upward at 55 miles. Terrain and obstacles around the radar site can further decrease radar coverage in all directions.
- Traffic does not have an operating transponder.

The “TIS Not Available” (TNA) voice alert can be manually muted to reduce nuisance alerting. TNA muting status is shown in the upper right corner of the Traffic Map Page.

Muting the “TIS Not Available” voice alert:

- 1) Select the ‘Map - Traffic Map’ Page.
- 2) Press the **TNA Mute** Softkey. The status is displayed in the upper left corner of the Traffic Map Page.

Or:

- a) Press the **MENU** Key.
- b) Select “‘Not Available’ Mute On” (shown if TNA muting is currently off) and press the **ENT** Key.

SYSTEM STATUS

The system performs an automatic test of TIS during power-on. If TIS passes the test, TIS enters Standby Mode (on the ground) or Operating Mode (in the air). If TIS fails the power on test, an annunciation is shown in the center of the 'Map - Traffic Map' Page.

Traffic Map Page Center Banner Annunciation	Description
NO DATA	Data is not being received from the transponder ¹
DATA FAILED	Data is being received from the transponder, but a failure is detected in the data stream ¹
FAILED	The transponder has failed ¹
UNAVAILABLE	TIS is unavailable or out of range

¹ Contact a service center or Garmin dealer for corrective action

Table 6-14 TIS Failure Annunciations

The traffic mode is annunciated in the upper right corner of the Traffic Map Page. When the aircraft is on the ground, TIS automatically enters Standby Mode. If traffic is selected for display on another map while Standby Mode is selected, the traffic display enabled icon is crossed out (also the case whenever TIS has failed). Once the aircraft is airborne, TIS switches to Operating Mode and traffic information is displayed. The mode can be changed manually using softkeys or the page menu.

Traffic Map Mode Annunciation	Traffic Map Center Banner Annunciation	Traffic Overlay Status Icon (Navigation Maps)	Description
DATA FAILED	TRFC FAIL		Data is being received from the transponder, but a failure is detected in the data stream ¹
NO DATA	TRFC FAIL		Data is not being received from the transponder ¹
OPERATING	None		TIS is operating and is receiving traffic data from a data link.
OPERATING	UNAVAILABLE		TIS is operating, but the traffic service is currently unavailable or is out of reception range.
STANDBY	STANDBY		TIS is in Standby Mode.
UNIT FAILED	TRFC FAIL		The transponder has failed ¹

¹ Contact a service center or Garmin dealer for corrective action

Table 6-15 TIS Modes and Status Annunciations

Switching between TIS modes:

- 1) Select the 'Map - Traffic Map' Page.
- 2) Press the **Standby** or **Operate** Softkey to switch between modes. The mode is displayed in the upper right corner of the Traffic Map Page.

Or:

- a) Press the **MENU** Key.
- b) Select 'Operate Mode' or 'Standby Mode' (choice dependent on current state) and press the **ENT** Key.

The annunciations to indicate the status of traffic information appear in a banner at the lower left corner of maps on which traffic can be displayed, as shown in the following table.

Traffic Status Banner Annunciation	Description
TA OFF SCALE	A Traffic Advisory is outside the selected display range ¹ Annunciation is removed when traffic comes within the selected display range
TA X.X ± XX ↓	System cannot determine bearing of Traffic Advisory ² Annunciation indicates distance in nm, altitude separation in hundreds of feet, and altitude trend arrow (climbing/descending)
AGE MM:SS	Appears if traffic data is not refreshed within 6 seconds If after another 6 seconds data is not received, traffic is removed from the display The quality of displayed traffic information is reduced as the age increases
TRFC COAST	The displayed data is not current (6 to 12 seconds since last message) The quality of displayed traffic information is reduced when this message is displayed
TRFC RMVD	Traffic is removed because it is too old for coasting (12 to 60 seconds since last message) Traffic may exist within the selected display range, but it is not displayed
TRFC FAIL	Traffic data has failed
NO TRFC DATA	Traffic has not been detected
TRFC UNAVAIL	The traffic service is unavailable or out of range

¹ Shown as symbol on Traffic Map Page

² Shown in center of Traffic Map Page

Table 6-16 TIS Traffic Status Annunciations

6.5 AVIDYNE TAS600 TRAFFIC



WARNING: Do not rely solely upon the display of traffic information for collision avoidance maneuvering. The traffic display does not provide collision avoidance resolution advisories and does not under any circumstances or conditions relieve the pilot's responsibility to see and avoid other aircraft.



WARNING: Do not rely solely upon the display of traffic information to accurately depict all of the traffic information within range of the aircraft. Due to lack of equipment, poor signal reception, and/or inaccurate information from other aircraft, traffic may be present but not represented on the display.



NOTE: Pilots should be aware of traffic system limitations. Traffic systems require transponders of other aircraft to respond to system interrogations. If the transponders do not respond to interrogations due to phenomena such as antenna shading or marginal transponder performance, traffic may be displayed intermittently, or not at all. Aircraft without altitude reporting capability are shown without altitude separation data or climb descent indication. Pilots should remain vigilant for traffic at all times.



NOTE: Mode-S TIS is disabled when another traffic system is installed.



NOTE: Refer to the Avidyne TAS600 Series Pilot's Guide for a detailed discussion of the Avidyne TAS600 System.

The optional Avidyne TAS600 is a Traffic Advisory System (TAS). It enhances flight crew situational awareness by displaying traffic information for transponder-equipped aircraft. The system also provides visual annunciations and voice alerts to help the pilot visually acquire traffic.

No TAS surveillance is provided for aircraft without operating transponders.

TAS THEORY OF OPERATION

When the traffic system is in Operating Mode, the system directly interrogates the transponders of other aircraft in the vicinity. The traffic system uses this information to derive the distance, relative bearing, and if reported, the altitude and vertical trend for each aircraft within its surveillance range. The traffic system then calculates a closure rate to each intruder based on the projected Closest Point of Approach (CPA). If the closure rate meets the threat criteria for a Traffic Advisory (TA), the traffic system provides visual annunciations and voice alerts.

TAS SYMBOLOGY

If a Avidyne TAS600 is installed with a Garmin GTX 335 or GTX 345 transponder, the system uses the following symbols to represent traffic.

TAS Symbol	Description
	Non-Threat Traffic
	Proximity Advisory (PA)
	Traffic Advisory (TA)
	Traffic Advisory Off Scale

Table 6-17 TAS Symbol Description

Symbol	Description
	Traffic Advisory with directional information. Points in the direction of the intruder aircraft track.
	Traffic Advisory without directional information.
	Traffic Advisory out of the selected display range with directional information. Displayed at outer range ring at proper bearing.
	Traffic Advisory out of the selected display range without directional information. Displayed at outer range ring at proper bearing.
	Proximity Advisory with directional information. Points in the direction of the aircraft track.
	Proximity Advisory without directional information.
	Other Non-Threat traffic with directional information. Points in the direction of the intruder aircraft track.
	Other Non-Threat traffic without directional information.
	Traffic located on the ground with directional information. Points in the direction of the aircraft track. Ground traffic is only displayed when ADS-B is in Surface (SURF) Mode or own aircraft is on the ground.
	Ground traffic without directional information. Ground traffic is only displayed when ADS-B is in Surface (SURF) Mode or own aircraft is on the ground.
	Non-aircraft ground traffic with ADS-B directional information. Pointed end indicates direction of travel. Ground traffic is only displayed when ADS-B is in Surface (SURF) Mode or own aircraft is on the ground.
	Non-aircraft ground traffic without ADS-B directional information. Ground traffic is only displayed when ADS-B is in Surface (SURF) Mode or own aircraft is on the ground.

Table 6-18 ADS-B Traffic Symbolology with GTX 345 R

A Traffic Advisory (TA), displayed as a solid amber circle or circle enclosing an arrow, alerts the crew to a potentially hazardous intruding aircraft, if the closing rate, distance, and vertical separation meet TA criteria. A TA that is beyond the selected display range (off scale) is indicated by a half TA symbol at the edge of the screen at the relative bearing of the intruder.

A Proximity Advisory (PA), displayed as a solid white diamond or arrow, indicates the intruding aircraft is within ± 1200 feet and is within a 6 nm range, but is still not considered a TA threat.

Other, non-threat traffic, shown as an open white diamond or arrow, is displayed for traffic beyond six nautical miles that is neither a TA or PA.

Relative altitude, when available, is displayed above or below the corresponding intruder symbol in hundreds of feet. When this altitude is above own aircraft, it is preceded by a '+' symbol; a minus sign '-' indicates traffic is below own aircraft.

The system displays the altitude vertical trend as an up/down arrow (for speeds greater than 500 fpm in either direction) to the right of the intruder symbol.

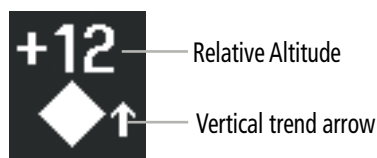


Figure 6-72 Intruder Altitude and Vertical Trend Arrow

TAS ALERTS



NOTE: If an optional Avidyne TAS600 is installed, refer to the Pilot's Guide from the manufacturer for information about voice alerts for that traffic system.

When the Avidyne TAS600 detects a new TA, the following occur:

- The system issues a single "Traffic!" voice alert, followed by additional voice information about the bearing, relative altitude, and approximate distance from the intruder that triggered the TA. For example, the announcement "Traffic! 12 o'clock, high, four miles," would indicate the traffic is in front of own aircraft, above own altitude, and approximately four nautical miles away.

Bearing	Relative Altitude	Approximate Distance (nm)
"One o'clock" through "Twelve o'clock" or "No Bearing"	"High", "Low", "Same Altitude" (if within 200 feet of own altitude), or "Altitude not available"	"Less than one mile", "One Mile" through "Ten Miles", or "More than ten miles"

Table 6-19 TAS TA Descriptive Voice Announcements

- A TRAFFIC Annunciation appears at the right of the airspeed on the PFD, flashes for five seconds, and remains displayed until no TAs are detected in the area.
- A PFD map is automatically displayed with TA traffic.
- If the bearing of TA traffic cannot be determined, a yellow text banner will be displayed in the center of the Traffic Map Page and in the lower-left of the PFD inset map instead of a TA symbol. The text will indicate "TA" followed by the distance, relative altitude, and vertical trend arrow for the TA traffic, if known.

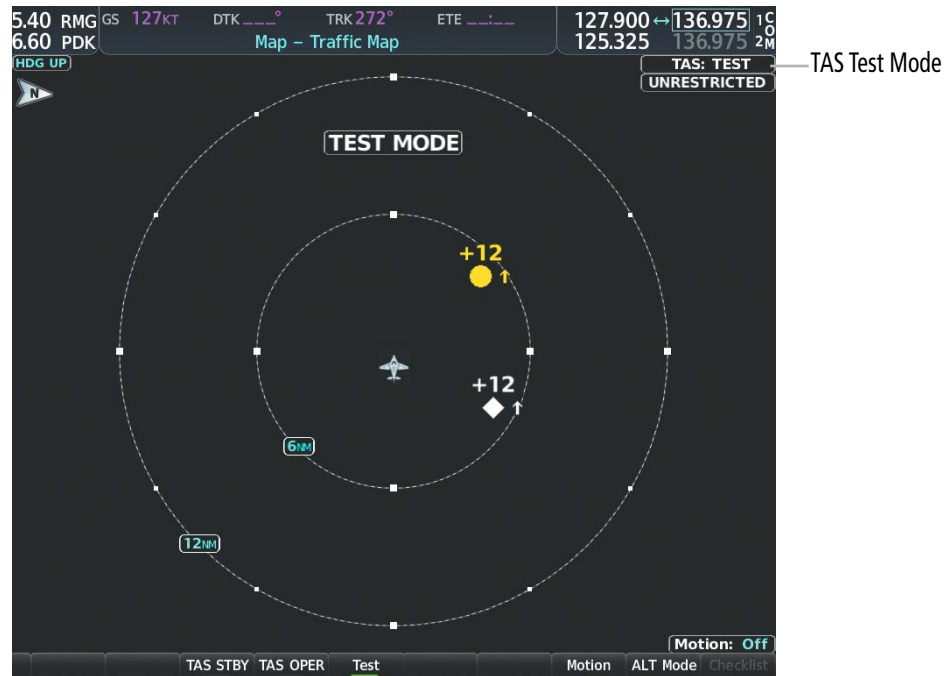


Figure 6-74 System Test in Progress with Test Pattern

OPERATION



NOTE: Refer to the Avidyne TAS600 Series Pilot's Guide for a detailed discussion of the Avidyne TAS600 system operation.

When power is initially supplied to the system while on the ground, the traffic system is in Standby Mode. The system must be in Operating Mode for traffic to be displayed and for TAs to be issued.

Changing traffic system modes on the Traffic Map Page:

- 1) Turn the large **FMS** Knob to select the Map Page Group.
- 2) Turn the small **FMS** Knob to select the 'Map - Traffic Map' Page.
- 3) Press the **Operate** or **TAS OPER** Softkey to begin displaying traffic. 'OPERATING' is displayed in the Traffic mode field.
- 4) Press the **Standby** or **TAS STBY** Softkey to place the system in the Standby mode. 'STANDBY' is displayed in the Traffic mode field.

Or:

- 1) With the 'Map - Traffic Map' Page displayed, press the **MENU** Key.
- 2) Turn the small **FMS** knob to highlight the desired mode.
- 3) Press the **ENT** Key.

TRAFFIC MAP PAGE

The 'Map - Traffic Map' Page shows surrounding traffic data in relation to the aircraft's current position and altitude, without basemap clutter. It is the principal map page for viewing traffic information. Aircraft orientation is always heading up unless there is no valid heading. The pilot can adjust the map range with the **Joystick**. A range indication appears on each range ring.

The system annunciates the traffic mode and altitude display mode in the upper right corner of the 'Map - Traffic Map' Page.

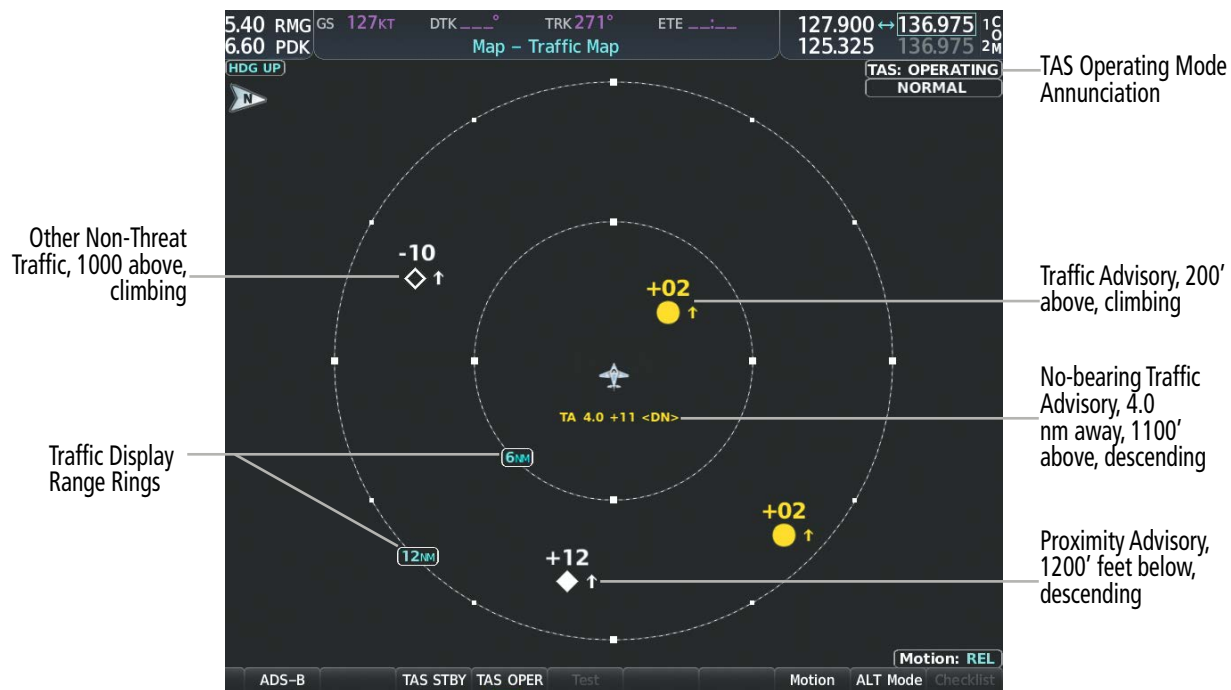


Figure 6-75 Traffic Map Page

ALTITUDE DISPLAY MODE

The pilot can select the volume of airspace in which Other Non-Threat and Proximity Advisory traffic is displayed. If traffic meets the criteria for a TA, it is also displayed even if it is outside of the selected volume of airspace.

Changing the altitude range:

- 1) On the 'Map - Traffic Map' Page, press the **ALT Mode** Softkey.
- 2) Select one of the following Softkeys:
 - **Above:** Displays Other Non-Threat and Proximity Advisory traffic from 9900 feet above the aircraft to 2700 feet below the aircraft. Typically used during climb phase of flight.
 - **Normal:** Displays Other Non-Threat and Proximity Advisory traffic from 2700 feet above the aircraft to 2700 feet below the aircraft. Typically used during enroute phase of flight.
 - **Below:** Displays Other Non-Threat and Proximity Advisory traffic from 2700 feet above the aircraft to 9900 feet below the aircraft. Typically used during descent phase of flight.
 - **UNREST** (unrestricted): All traffic is displayed from 9900 feet above and 9900 feet below the aircraft.
- 3) To return to the 'Map - Traffic Map' Page, select the **Back** Softkey.

Or:

- 1) Press the **MENU** Key.
- 2) Turn the small **FMS** Knob to select one of the following (see softkey description in the previous step 2):
 - Above
 - Normal
 - Below
 - Unrestricted
- 3) Press the **ENT** key.

TRAFFIC MAP PAGE DISPLAY RANGE

The display range on the 'Map - Traffic Map' Page can be changed at any time. Map range is adjustable with the **Joystick**, and rings on the map denote the ranges.

Changing the display range on the Traffic Map Page:

- 1) Turn the **Joystick**.
- 2) The following range options are available:
 - 750 ft (with optional ADS-B)
 - 750 ft and 1500 ft (with optional ADS-B)
 - 1500 ft and 0.5 nm (with optional ADS-B)
 - 0.5 nm and 1 nm (with optional ADS-B)
 - 1 nm and 2 nm (with optional ADS-B)
 - 2 nm
 - 2 and 6 nm
 - 6 and 12 nm
 - 12 and 24 nm
 - 24 and 40 nm

ADDITIONAL TRAFFIC DISPLAYS

The 'Map - Traffic Map' Page is the principal map page for viewing traffic information. Traffic information can also be displayed on the following other maps for additional reference on the MFD when the traffic unit is operating:

- » Navigation Map Page
- » Traffic Map Page
- » Trip Planning Page
- » Nearest Pages
- » Active Flight Plan Page

Enabling/disabling traffic information (MFD maps other than the Traffic Map Page):

- 1) Press the **Map Opt** Softkey.
- 2) Press the **Traffic** Softkey. Traffic is now displayed on the map.

When traffic is selected on maps other than the 'Map - Traffic Map' Page, the system shows a traffic status icon to indicate traffic is enabled for display as well as the altitude display mode (Above, Below, Normal, Unres).

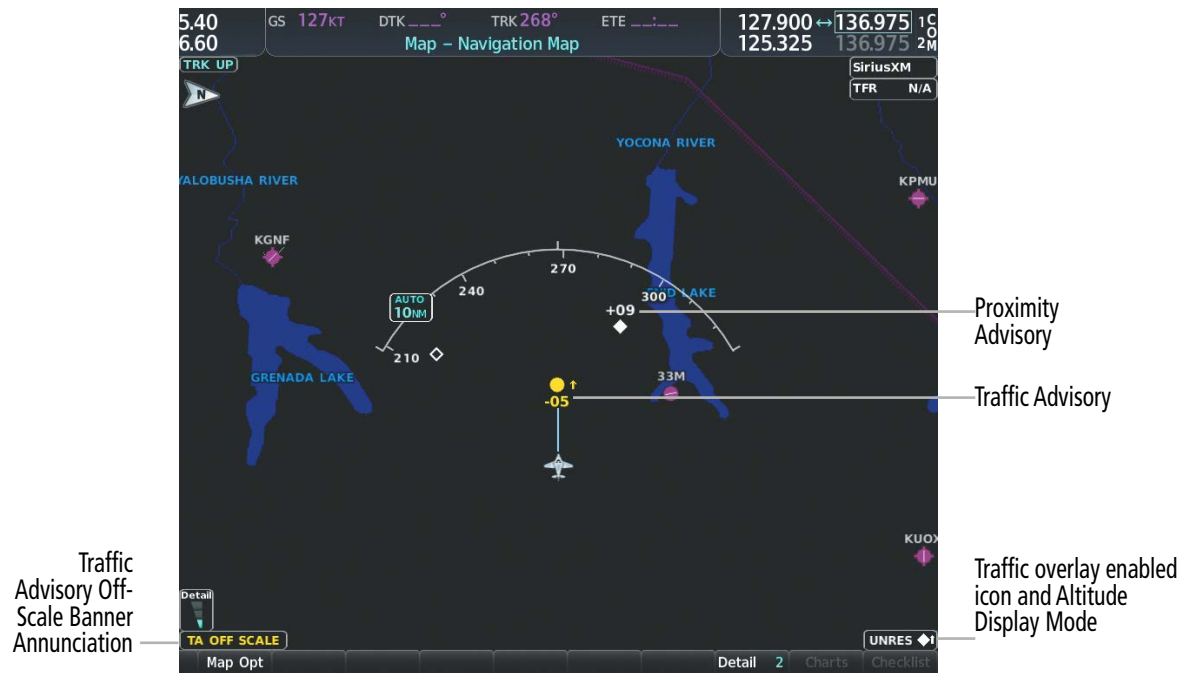


Figure 6-76 TAS Traffic on Navigation Map

Customizing the traffic display on the Navigation Map Page:

- 1) Select the 'Map - Navigation Map' Page.
- 2) Press the **MENU** Key.
- 3) With 'Map Settings' highlighted, press the **ENT** Key.
- 4) Turn the small **FMS** Knob to select the Traffic Group and press the **ENT** Key.
- 5) Turn the large **FMS** Knob or press the **ENT** Key to scroll through the selections.
 - Traffic – Turns the display of traffic data on or off
 - Traffic Mode – Selects the traffic mode for display; select from:
 - All Traffic - Displays all traffic
 - TA/PA - Displays only Traffic Advisories and Proximity Advisories
 - TA Only - Displays Traffic Advisories only
 - Traffic Symbols – Selects the maximum range at which traffic symbols are shown
 - Traffic Labels – Selects the maximum range at which traffic labels (relative altitude, vertical trend) are shown with the option to turn off

- 6) Turn the small **FMS** Knob to scroll through options (On/Off, range settings, etc.).
- 7) Press the **ENT** Key to select an option.
- 8) Push the **FMS** Knob or **CLR** Key to return to the 'Map - Navigation Map' Page.

The Navigation Map Page Setup Menu also controls the display of traffic. The setup menu controls the map range settings. Traffic data symbols and labels can be decluttered from the display. If a map range larger than the map range setting is selected, the data is removed from the map. Maps besides the Traffic Map Page use settings based on those selected for the Navigation Map Page.

A traffic-only inset map is available on the PFD by pressing the **TFC Map** Softkey. A traffic map appears on the PFD. This map resembles the Traffic Map Page, and presents a heading up format. Traffic information can also be overlaid on PFD navigation maps.

Enabling/disabling traffic overlay on PFD navigation maps:

- 1) With the Inset Map or HSI Map displayed, press the **Map/HSI** Softkey on the PFD.
- 2) Press the **Traffic** Softkey to enable/disable the display traffic information.

SYSTEM STATUS

The traffic mode is annunciated in the upper right corner of the 'Map - Traffic Map' Page.

Mode	Traffic Mode Annunciation (Traffic Map Page)	Traffic Display Status Icon (Other Maps)
Traffic System Test Initiated	TEST ('TEST MODE' shown in center of page)	
Operating	OPERATING	
Standby	STANDBY (also shown in white in center of page)	
Traffic System Failed ¹	FAIL	

¹ See Table 6-23 for additional failure annunciations

Table 6-20 TAS Traffic Modes

If the traffic unit fails, an annunciation as to the cause of the failure is shown in the center of the 'Map - Traffic Map' Page. During a failure condition, the Operating Mode cannot be selected.

Traffic Map Page Center Annunciation	Description
NO DATA	Data is not being received from the TAS unit
DATA FAILED	Data is being received from the TAS unit, but the unit is self-reporting a failure
FAILED	Incorrect data format received from the TAS unit

Table 6-21 TAS Failure Annunciations

The annunciations to indicate the status of traffic information appear in a banner at the lower left corner of maps on which traffic can be displayed.

Traffic Status Banner Annunciation	Description
TA OFF SCALE	A Traffic Advisory is outside the selected display range ¹ . Annunciation is removed when traffic comes within the selected display range.
TA X.X ± XX ↓	System cannot determine bearing of Traffic Advisory ² . Annunciation indicates distance in nm, altitude separation in hundreds of feet, and altitude trend arrow (climbing/descending).
TRFC FAIL	TAS unit has failed (unit is self-reporting a failure or sending incorrectly formatted data)
NO TRFC DATA	Data is not being received from the TAS unit

¹ Shown as symbol on Traffic Map Page

² Shown in center of Traffic Map Page

Table 6-22 TAS Traffic Status Annunciations

on the installed equipment. The 1090 MHz frequency portion of ADS-B is known as 1090 Extended Squitter (1090 ES). The 978 MHz portion of ADS-B is known as Universal Access Transceiver (UAT).

The optional Garmin GTX 345R transponder provides ADS-B Out functions using the 1090 ES data link. It also performs ADS-B In functions using the UAT data link. This includes the reception of Flight Information Services-Broadcast (FIS-B) data link weather service, provided when the aircraft is receiving data from a participating ground station; refer to the Data Link Weather section for more information about FIS-B Weather.

AUTOMATIC DEPENDENT SURVEILLANCE-REBROADCAST (ADS-R)

Because it is not required that ADS-B In capable aircraft be able to receive ADS-B data on both the 1090 MHz and 978 MHz data links, a method exists to get data from one data link to the other. ADS-R is the rebroadcast of ADS-B data by FAA ground stations, which provide this service by taking traffic data from one link and rebroadcasting it on the other. For example, if two aircraft are in the service volume for a ground station, and one is transmitting on 1090 MHz and the other is transmitting on 978 MHz, the ground station retransmits the data from each aircraft on the other link to ensure the two aircraft can “see” each other as traffic.

If another aircraft can only receive 978 MHz UAT information, it cannot directly ‘see’ another aircraft sending only 1090 ES information aircraft unless an ADS-R ground station in the vicinity rebroadcasts the 1090 ES data over the 978 MHz UAT frequency. This is also true for an aircraft when can only receive 1090 ES data; it would need an ADS-R ground station to ‘see’ another aircraft operating on the UAT frequency.

TRAFFIC INFORMATION SERVICE-BROADCAST (TIS-B)

TIS-B provides a link between the secondary surveillance radar (SSR)-based system ATC uses and the ADS-B-based system. When an ADS-B In or Out capable aircraft is within the service volume of an FAA ADS-B ground station, the ground station broadcasts a portion of the ATC radar data to the aircraft. This aircraft is then included in the list of aircraft being provided TIS-B service and is then considered a “TIS-B participant.”

TIS-B coverage is available when the aircraft is within ground station coverage, in SSR coverage, and the other aircraft is also in SSR coverage, and is transmitting its altitude.

The ground station provides ATC radar information for other aircraft within $\pm 3,500$ feet and 15 NM of the participant, to include altitude, position, ground speed, and ground track. TIS-B broadcasts occur once every three to thirteen seconds, depending on the characteristics of the ground station providing the TIS-B service.

The following table describes the aircraft that are observed by a GTX 345R-equipped aircraft according to the level of equipment installed in the other aircraft.

Other Aircraft Equipment	Viewable by GTX 345R Equipped Aircraft
1090ES Out Equipped	Yes
UAT Receive Only Capable	No
UAT Transmit Equipped	Yes
No Transponder, No ADS-B	No
Non ADS-B Equipped, but with Mode C or S Transponder	Yes ¹

¹ Only when in ADS-B ground station coverage and when the other aircraft is in ATC radar coverage.

Table 6-23 Aircraft Available for Viewing by an ADS-B Equipped Own Aircraft

ADS-B WITH TAS

When an optional Traffic Advisory System (TAS) is also installed and operating with the UAT, the UAT receives traffic from the active traffic system and attempts to match (or “correlate”) this traffic with ADS-B traffic the UAT is tracking. When a correlation is made, only the traffic with the most accurate information is displayed to the flight crew. Any traffic that is not correlated (i.e., only detected by one system but not the other) is also displayed for the flight crew. This correlation of traffic by the UAT improves the accuracy of the traffic displayed, while reducing the occurrence of the same aircraft being displayed twice.

 **NOTE:** In certain situations, a single aircraft may be depicted as two aircraft on the display if the system is unable to correlate the traffic. This may occur, for example, when operating on the edges of ATC radar coverage, or when using an optional active traffic system providing intermittent data. This may also occur if TIS-B traffic data does not closely match the traffic data from other sources, especially while the traffic tracked by ATC radar is turning.

 **NOTE:** The TAS system issues alerts for traffic it is tracking using TAS alerting criteria. The ADS-B system issues alerts for traffic it is tracking using the Conflict Situational Awareness & Alerting (CSA) criteria.

Either the TAS or the UAT unit can issue a traffic alert. If both systems determine an alert is necessary, and the traffic is correlated, only the TAS-generated alert is issued. If traffic is not correlated, and both systems determine an alert is necessary, the TAS-generated alert occurs first, followed by the UAT-generated alert.

CONFLICT SITUATIONAL AWARENESS & ALERTING (CSA)

Conflict Situational Awareness (CSA) is an alerting algorithm which provides ADS-B traffic alerting similar to the TAS system discussed previously.

When a TA occurs with this equipment, the system displays a ‘TRAFFIC’ annunciation and provides a voice alert for example “Traffic! Two O’clock, Low, Two Miles.”.

The own aircraft altitude above terrain determines the sensitivity of the CSA algorithm to minimize nuisance alerts. Height Above Terrain, and Geodetic Sea Level (GSL) altitude are used to adjust the sensitivity of the CSA algorithm in accordance with the following table:

Sensitivity Level	Height Above Terrain (HAT)	GPS Phase of Flight	Own Altitude (Feet)	Look-ahead time (sec)	Vertical Threshold for Alert (feet)	Protected Volume (NM)
4	Any	Any	Any	20	850	0.20
4	Any	Any	Any	20	850	0.20
4	Unavailable	Approach	Any	20	850	0.20
5	Any	Any	Any	25	850	0.20
5	>1000 <=2350	Any	Any	25	850	0.20
5	Unavailable	Terminal	Any	25	850	0.20
6	Unavailable or >2350	Not approach and not Terminal (including unavailable)	<=5000	30	850	0.35

Sensitivity Level	Height Above Terrain (HAT)	GPS Phase of Flight	Own Altitude (Feet)	Look-ahead time (sec)	Vertical Threshold for Alert (feet)	Protected Volume (NM)
7	Unavailable or >2350	Not approach and not Terminal (including unavailable)	>5000 <=10,000	40	850	0.55
8	Unavailable or >2350	Not approach and not Terminal (including unavailable)	>10,000 <=20,000	45	850	0.80
9	Unavailable or >2350	Not approach and not Terminal (including unavailable)	>20,000 <=42,000	48	850	1.10
10	Unavailable or >2350	Not approach and not Terminal (including unavailable)	> 42,000	48	1200	1.10

Table 6-24 CSA Alerting Thresholds for ADS-B Traffic

When the system detects a new Traffic Advisory (TA), the following occur:

- The system issues a single “Traffic!” voice alert, followed by additional voice information about the bearing, relative altitude, and approximate distance from the intruder that triggered the TA. For example, the announcement “Traffic! 12 o’clock, high, four miles,” would indicate the traffic is in front of own aircraft, above own altitude, and approximately four nautical miles away.

Bearing	Relative Altitude	Approximate Distance (nm)
“One o’clock” through “Twelve o’clock” or “No Bearing”	“High”, “Low”, “Same Altitude” (if within 200 feet of own altitude), or “Altitude not available”	“Zero miles”, “Less than one mile”, “One Mile” through “Ten Miles”, or “More than ten miles”

Table 6-25 TA Descriptive Voice Announcements

- A ‘TRAFFIC’ annunciation appears to the right of the Airspeed Indicator on the PFD, flashes for five seconds, and remains displayed until no TAs are detected in the area..
- If the PFD Inset Map or HSI Map was already displayed, the traffic is shown on the displayed map. Otherwise the Traffic Map is shown on the PFD.
- If the bearing of TA traffic cannot be determined, a yellow text banner will be displayed in the center of the Traffic Map and in the lower-left of the PFD inset map instead of a TA symbol. The text will indicate ‘TA’ followed by the distance, relative altitude, and vertical trend arrow for the TA traffic, if known.

A TA will be displayed for at least eight seconds, even if the condition(s) that initially triggered the TA are no longer a factor.



Figure 6-78 Traffic Annunciation (PFD)



NOTE: ADS-B traffic voice alerts are suppressed when below 500 feet.

AIRBORNE AND SURFACE APPLICATIONS

ADS-B traffic can help the pilot visually acquire traffic both in the air and on-the-ground. There are two ADS-B applications or modes: Airborne Situational Awareness (AIRB) and Surface Situational Awareness (SURF). The system automatically selects the appropriate application based on conditions.

The AIRB application is on when the aircraft is more than five NM and 1,500 feet above the nearest airport. When the AIRB application is active, the system only displays traffic which is airborne.

The SURF application is on when the aircraft is within five NM and less than 1,500 feet above field elevation. When the SURF application is on, the system displays airborne and on the ground traffic. At a Traffic Map Page range of one nm or less, the airport environment (including taxiways and runways) appears in addition to traffic. The airport displays are derived from the SafeTaxi database. Refer to the Additional Features section for more information about SafeTaxi displays.



NOTE: Do not rely on the solely on the traffic display to determine the runway alignment of traffic, especially when runways are in close proximity to each other.

Due to the varying precision of the data received via ADS-B, ADS-R, and TIS-B services, not all traffic symbols may be depicted on the traffic display. Because higher data precision is required for traffic to be displayed in the SURF environment, some traffic eligible for AIRB will not be displayed while SURF is on. Availability for AIRB and SURF is depicted on the Aux - ADS-B Status Page, discussed later in this section.



Figure 6-79 Traffic Map Page with SURF Mode On

TRAFFIC DESCRIPTION

The symbols used to display ADS-B traffic are shown in the following table.

Symbol	Description
	Traffic Advisory with directional information. Points in the direction of the intruder aircraft track.
	Traffic Advisory without directional information.
	Traffic Advisory out of the selected display range with directional information. Displayed at outer range ring at proper bearing.
	Traffic Advisory out of the selected display range without directional information. Displayed at outer range ring at proper bearing.
	Proximity Advisory with directional information. Points in the direction of the aircraft track.
	Proximity Advisory without directional information.
	Other Non-Threat traffic with directional information. Points in the direction of the intruder aircraft track.

Symbol	Description
	Other Non-Threat traffic without directional information.
	Traffic located on the ground with directional information. Points in the direction of the aircraft track. Ground traffic is only displayed when ADS-B is in Surface (SURF) Mode or own aircraft is on the ground.
	Ground traffic without directional information. Ground traffic is only displayed when ADS-B is in Surface (SURF) Mode or own aircraft is on the ground.
	Non-aircraft ground traffic with ADS-B directional information. Pointed end indicates direction of travel. Ground traffic is only displayed when ADS-B is in Surface (SURF) Mode or own aircraft is on the ground.
	Non-aircraft ground traffic without ADS-B directional information. Ground traffic is only displayed when ADS-B is in Surface (SURF) Mode or own aircraft is on the ground.

Table 6-26 ADS-B Traffic Symbology

OPERATION

TRAFFIC MAP PAGE

The 'Map - Traffic Map' Page shows surrounding traffic data in relation to the aircraft's current position and altitude, without basemap clutter. Aircraft orientation is always heading up unless there is no valid heading. Map range is adjustable with the **Joystick**, as indicated by the map range rings.

The traffic mode and altitude display mode are annunciated in the upper right corner of the page.



Figure 6-80 Traffic Map Page

Enabling/disabling the display of ADS-B traffic:

- 1) Select the 'Map - Traffic Map' Page.
 - 2) Press the **ADS-B** Softkey.
- Or:**
- a) Press the **MENU** Key and turn the small **FMS** Knob to highlight 'ADS-B On' or 'ADS-B Off'.
 - b) Press the **ENT** Key.

Testing the display of ADS-B traffic:

- 1) Select the 'Map - Traffic Map' Page.
 - 2) If necessary, turn the Joystick to select a map range of 2 and 6 nm to ensure full test pattern display.
 - 3) Ensure the **ADS-B** Softkey is disabled.
 - 4) If the optional TAS is installed, ensure the **TAS STBY** Softkey is enabled.
 - 5) Press the **Test** Softkey.
- Or:**
- a) Press the **MENU** Key.
 - b) Turn the small **FMS** Knob to highlight 'Test Mode'.
 - c) Press the **ENT** Key.

A test pattern of traffic symbols appears during the test, and a 'TRAFFIC' annunciation appears on the PFD. At the conclusion of the test, the system issues the voice alert "Traffic System Test". If the test pattern is displayed and the voice alert is heard, the system has passed the test.



Figure 6-81 System Test in Progress with Test Pattern

The pilot can select the volume of airspace in which Other Non-Threat and Proximity traffic is displayed. TAs occurring outside of these limits will always be shown.

Changing the altitude range:

- 1) On the 'Map - Traffic Map' Page, press the **ALT Mode** Softkey.
 - 2) Press one of the following softkeys:
 - **Above:** Displays Other Non-Threat and proximity traffic from 9000 feet above the aircraft to 2700 feet below the aircraft. Typically used during climb phase of flight.
 - **Normal:** Displays Other Non-Threat and proximity traffic from 2700 feet above the aircraft to 2700 feet below the aircraft. Typically used during enroute phase of flight.
 - **Below:** Displays Other Non-Threat and proximity traffic from 2700 feet above the aircraft to 9000 feet below the aircraft. Typically used during descent phase of flight.
 - **UNREST** (unrestricted): All traffic is displayed from 9900 feet above and 9900 feet below the aircraft.
 - 3) To return to the 'Map - Traffic Map' Page, press the **Back** Softkey.
- Or:**
- 1) Press the **MENU** Key.
 - 2) Turn the small **FMS** Knob to highlight one of the following options (see softkey description in the previous step 2):
 - Above
 - Normal
 - Below
 - Unrestricted
 - 3) Press the **ENT** Key.

DISPLAYING MOTION VECTORS

When Absolute Motion Vectors are selected, the vectors extending from the traffic symbols depict the traffic's reported track and speed over the ground. When Relative Motion Vectors are selected, the vectors extending from the traffic symbols display how the traffic is moving relative to own aircraft. These vectors are calculated using the traffic's track and ground speed and own aircraft's track and ground speed. These two values are combined to depict where the traffic is moving purely with respect to own aircraft, and provide a forecast of where the traffic will be, relative to own aircraft, in the near future.

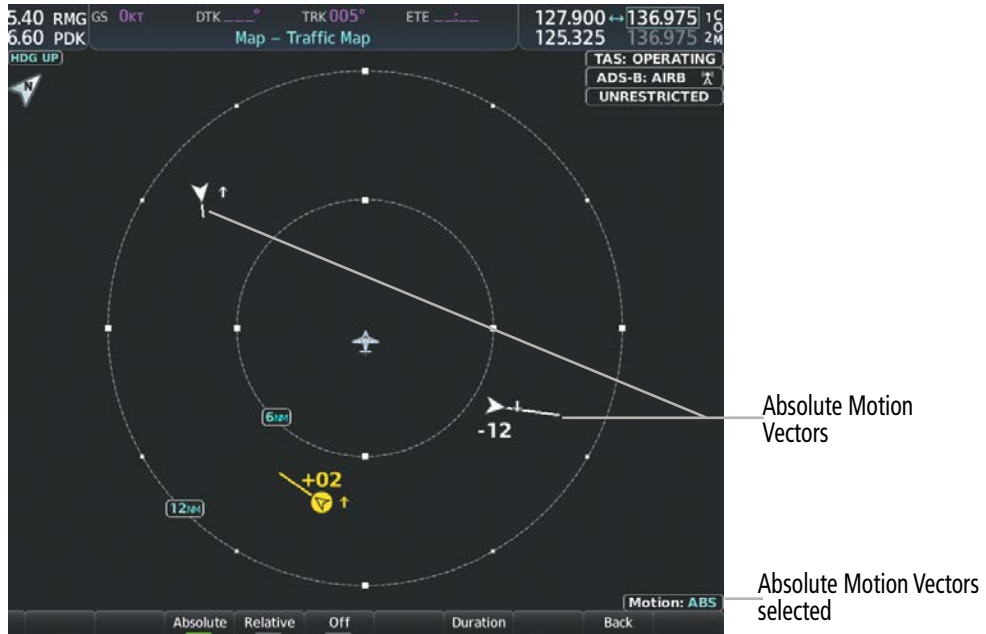


Figure 6-82 Traffic Map Page with Absolute Motion Vectors Enabled



Figure 6-83 Traffic Map Page with Relative Motion Vectors Enabled

Enabling/disabling the Motion Vector display:

- 1) Press the 'Map -Traffic Map' Page.
- 2) Press the **Motion** Softkey.
- 3) Select one of the following softkeys:
 - **Absolute:** Displays the motion vector pointing in the absolute direction.
 - **Relative:** Displays the motion vector relative to own aircraft
 - **Off:** Disables the display of the motion vector.

Or:

- 1) Select the 'Map -Traffic Map' Page.
- 2) Press the **MENU** Key.
- 3) Turn the small **FMS** Knob to highlight 'Relative Motion', 'Absolute Motion' or 'Motion Vector Off'.
- 4) Press the **ENT** Key.

Adjusting the duration for the Motion Vector projected time:

- 1) Select the 'Map - Traffic Map' Page.
- 2) Press the **Motion** Softkey.
- 3) Press the **Duration** Softkey.
- 4) Press a softkey for the desired duration (**30 SEC, 1 MIN, 2 MIN, 5 MIN**).
- 5) When finished, press the **Back** Softkey to return to the 'Map - Traffic Map' Page.

DISPLAYING ADDITIONAL TRAFFIC INFORMATION

The 'Map - Traffic Map' Page can display additional information for a selected aircraft symbol. This may include the aircraft tail number/Flight ID, type of aircraft (e.g., glider, small/medium/large aircraft, service vehicle, unmanned airborne vehicle (UAV), course, track, groundspeed), and other information.

Showing additional traffic information:

- 1) Select the 'Map - Traffic Map' Page.
- 2) Push the **FMS** Knob. A cyan border appears on the first selected traffic symbol. Additional information appears in a window in the lower-left corner of the 'Map - Traffic Map' Page.
- 3) To select a different aircraft symbol, turn the **FMS** Knob to move the cyan border until another symbol is selected.
- 4) When finished, push the **FMS** Knob again to disable the traffic selection.

TRAFFIC MAP PAGE DISPLAY RANGE

The display range on the 'Map - Traffic Map' Page can be changed at any time. Map range is adjustable with the **Joystick**, as indicated by the map range rings.

Changing the display range on the Traffic Map Page:

- 1) Turn the **Joystick**.
- 2) The following range options are available:
 - 750 feet
 - 750 feet and 1500 feet
 - 1500 feet and 0.5 nm
 - 0.5 and 1 nm
 - 1 and 2 nm
 - 2 and 6 nm
 - 6 and 12 nm
 - 12 and 24 nm
 - 24 and 40 nm



NOTE: ADS-B traffic can be displayed as an overlay to navigation maps and IFR/VFR Charts. Refer to the previous TAS discussions for information about these additional traffic displays.

ADS-B SYSTEM STATUS

The traffic mode is annunciated in the upper right corner of the 'Map - Traffic Map' Page.

ADS-B Mode	Traffic Mode Annunciation (Traffic Map Page)	Traffic Map Page Center Banner Annunciation	Traffic Display Status Icon (Other Maps)
ADS-B System Test Initiated	ADS-B: TEST	TEST MODE	
ADS-B Operating in Airborne Mode	ADS-B: AIRB	None	
ADS-B Operating in Surface Mode	ADS-B: SURF	None	
ADS-B Traffic Off	ADS-B: OFF	ADS-B TRFC OFF	
ADS-B Traffic Not Available	ADS-B: N/A	ADS-B TRFC N/A	
ADS-B Failed ¹	ADS-B: FAIL	ADS-B TRFC FAIL	

¹ See Table 6-28 for additional failure annunciations

Table 6-27 ADS-B Modes



NOTE: If the optional TAS fails, the display of ADS-B traffic (ADS-B In) also fails, unless a GTX 345R transponder is installed. In this case, if the TAS fails, the display of ADS-B traffic continues even if the TAS has failed.

If the traffic unit fails, an annunciation as to the cause of the failure is shown in the center of the 'Map - Traffic Map' Page. During a failure condition, the Operating Mode cannot be selected.

Traffic Map Page Center Annunciation	Description
NO DATA	Data is not being received from the traffic unit
DATA FAILED	Data is being received from the traffic unit, but the unit is self-reporting a failure
FAILED	Incorrect data format received from the traffic unit

Table 6-28 ADS-B Traffic Failure Annunciations

The annunciations to indicate the status of traffic information appear in a banner at the lower left corner of maps on which traffic can be displayed.

Traffic Status Banner Annunciation	Description
TA OFF SCALE	A Traffic Advisory is outside the selected display range ¹ . Annunciation is removed when traffic comes within the selected display range.
TA X.X ± XX ↓	System cannot determine bearing of Traffic Advisory ² . Annunciation indicates distance in nm, altitude separation in hundreds of feet, and altitude trend arrow (climbing/descending).
TRFC FAIL	Traffic unit has failed (unit is self-reporting a failure or sending incorrectly formatted data)
NO TRFC DATA	Data is not being received from the traffic unit

¹ Shown as symbol on Traffic Map Page

² Shown in center of Traffic Map Page

Table 6-29 ADS-B Traffic Status Annunciations

Additional information about the status of ADS-B traffic products is available on the 'Aux - ADS-B Status' Page.

Viewing ADS-B Traffic Status:

- 1) Turn the large **FMS** Knob to select the Aux Page Group.
- 2) Turn the small **FMS** Knob to select the 'Aux - ADS-B Status' Page.



Figure 6-84 Viewing ADS-B Traffic Status on ADS-B Status Page

ADS-B Status Page Item	Status Message	Description
Traffic Application Status: Airborne (AIRB), Surface (SURF), Airborne Alerts (CSA)	On	Traffic application is currently on. Required input data is available, and it meets performance requirements.
	Available to Run	Traffic application is not currently active, but application is ready to run when condition(s) determine the application should be active. Required input data is available, and it meets performance requirements.
	Not Available	Traffic application is not available. Required input data is available, but it does not meet performance requirements.
	Fault	Traffic application is not available. Required input data is not available or the application has failed.
	Not Configured	Traffic application is not available, because it has not been configured. If this annunciation persists, the system should be serviced.
	-----	Traffic application status is invalid or unknown.
TIS-B/ADS-R Coverage	Available	The system is receiving the ADS-R coverage from an FAA ground station.
	Not Available	The system is not receiving the ADS-R coverage from an FAA ground station.
	-----	ADS-R coverage is invalid or unknown.
GPS Status: GPS Source	External #1	The system is using the #1 GPS receiver for the GPS position source.
	External #2	The system is using the #2 GPS receiver for the GPS position source.
	-----	The GPS source is invalid or unknown.
Ground Uplink Status: Last Uplink	Number of minutes, or '-----'	Displays the number of minutes since the last uplink from a ground station occurred. If no uplink has been received, or the status is invalid, dashes appear instead of the number of minutes.

Table 6-30 Aux-ADS-B Status Page Messages for ADS-B Traffic

The 'Traffic Map' Page displays a white antenna icon to indicate the successful reception of ADS-B traffic services from a ground station. A white-X over this icon indicates reception of ADS-B services is unavailable.

ADS-B Ground Station Reception Status	'Traffic Map' Pane Icon
Receiving ADS-B traffic services from a ground station	
Not receiving ADS-B traffic services from a ground station	

Table 6-31 ADS-B Modes

SYSTEM OVERVIEW
FLIGHT INSTRUMENTS
EIS
AUDIO & CNS
FLIGHT MANAGEMENT
HAZARD AVOIDANCE
AFCS
ADDITIONAL FEATURES
APPENDICES
INDEX

Blank Page

SECTION 7 AUTOMATIC FLIGHT CONTROL SYSTEM

7.1 AFCS OVERVIEW



NOTE: The current version of the pertinent flight manual always supersedes the information in this Pilot's Guide.



NOTE: A failure of the primary (#1) Integrated Avionics Unit (IAU) results in loss of the Flight Director. Any IAU failure results in loss of the autopilot and manual electric trim.

The Garmin AFCS is a digital Automatic Flight Control System (AFCS), fully integrated within the avionics architecture. The System Overview section provides a block diagram to support this system description.

The Garmin AFCS can be divided into these main operating functions:

- **Flight Director (FD)** — Flight Director operation takes place within the primary (#1) IAU. Flight Director commands are displayed on the PFD. The Flight Director provides:
 - Command Bars showing pitch/roll guidance.
 - Pitch/roll mode selection and processing.
 - Autopilot communication.
- **Autopilot (AP)** — Autopilot operation occurs within the pitch, roll, and pitch trim servo and provides servo monitoring and automatic flight control in response to Flight Director steering commands, AHRS attitude and rate information, and airspeed.
- **Manual Electric Trim (MET)** — The pitch trim servo provides manual electric trim capability when the autopilot is not engaged.

7.2 AFCS CONTROLS

AFCS CONTROLLER

The following dedicated AFCS keys are located on the bezel of the MFD:

- ① **AP** Key Engages/disengages the autopilot
- ② **FD** Key Activates/deactivates the flight director only
 - Pressing once turns on the flight director in the default pitch and roll modes.
 - Pressing again deactivates the flight director and removes the command bars. If the autopilot is engaged, the key is disabled.
- ③ **NAV** Key Selects/deselects Navigation Mode
- ④ **ALT** Key Selects/deselects Altitude Hold Mode
- ⑤ **VS** Key Selects/deselects Vertical Speed Mode
- ⑥ **FLC** Key Selects/deselects Flight Level Change Mode
- ⑦ **HDG** Key Selects/deselects Heading Select Mode
- ⑧ **APR** Key Selects/deselects Approach Mode
- ⑨ **VNV** Key Selects/deselects Vertical Path Tracking Mode for Vertical Navigation flight control
- ⑩ **NOSE UP** Key Control the mode reference in Pitch Hold, Vertical Speed, and Flight Level Change modes
NOSE DN Key

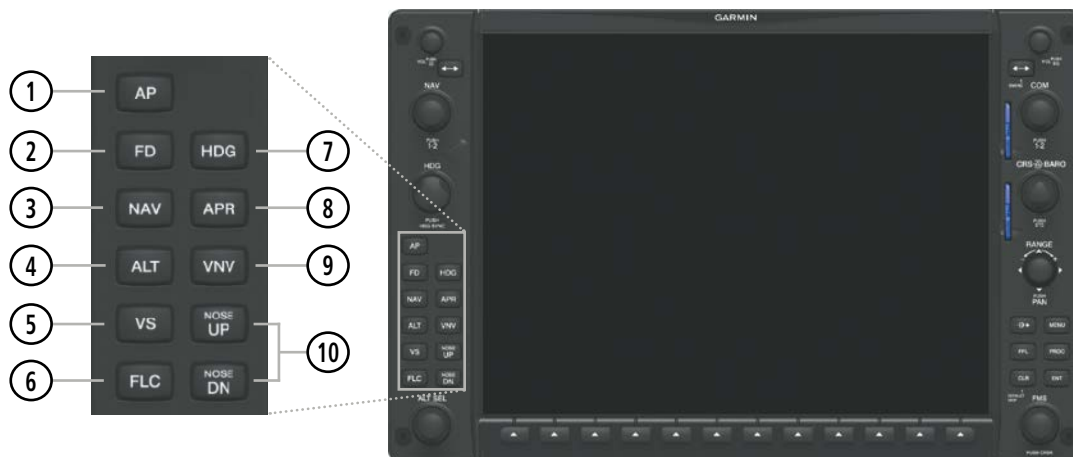


Figure 7-1 GDU 1054 Dedicated AFCS Controls

ADDITIONAL AFCS CONTROLS

The following AFCS controls are located in the cockpit separately from the MFD:

AP DISC Switch (Autopilot Disconnect)	Disengages the autopilot and interrupts pitch trim operation - This switch may be used to mute the aural autopilot disconnect alert. - The AP DISC Switch is located on each control stick.
CWS Button (Control Wheel Steering)	While pressed, allows manual control of the aircraft while the autopilot is engaged and synchronizes the Flight Director's Command Bars with the current aircraft pitch (if not in Glideslope Mode) and roll (if in Roll Hold Mode) - Upon release of the CWS Button, the Flight Director may establish new reference points, depending on the current pitch and roll modes. CWS operation details are discussed in the Flight Director Modes section. - The CWS Button is located on the top of the left control stick.
GO AROUND Button	Disengages the autopilot and selects Flight Director Takeoff (on ground) or Go Around (in air) Mode - If an approach procedure is loaded this switch also activates the missed approach when the selected navigation source is GPS or when the navigation source is VOR/LOC and a valid frequency has been tuned. - The GO AROUND Button is located on the left hand throttle.
AP TRIM Switch (Autopilot Trim)	Used to command manual electric trim (MET) - This composite switch is split into left and right sides. The left switch is the ARM contact and the right switch controls the DN (forward) and UP (rearward) contacts. The AP TRIM ARM switch can be used to disengage the autopilot and to acknowledge an autopilot disconnect alert and mute the associated aural tone. - Manual trim commands are generated only when both sides of the switch are operated simultaneously. If either side of the switch is active separately for more than three seconds, MET function is disabled and 'PTRM' is displayed as the AFCS Status Annunciation on the PFD. The function remains disabled until both sides of the switch are inactivated. - The AP TRIM Switch is located on the left control stick.

7.3 FLIGHT DIRECTOR OPERATION

The Flight Director function provides pitch and roll commands to the AFCS and displays them on the PFD. With the Flight Director activated, the aircraft can be hand-flown to follow the path shown by the Command Bars. Maximum commanded pitch ($-15^{\circ}/+16^{\circ}$) and roll (22°) angles, vertical acceleration, and roll rate are limited to established values. The Flight Director also provides commands to the autopilot.

ACTIVATING THE FLIGHT DIRECTOR

An initial press of a key listed in following table (when the Flight Director is not active) activates the Flight Director in the listed modes. The Flight Director may be turned off and the Command Bars removed from the display by pressing the **FD** Key again. The **FD** Key is disabled when the autopilot is engaged.

Control Pressed	Modes Selected			
	Lateral		Vertical	
FD Key	Roll Hold (default)	ROL	Pitch Hold (default)	PIT
AP Key	Roll Hold (default)	ROL	Pitch Hold (default)	PIT
CWS Button	Roll Hold (default)	ROL	Pitch Hold (default)	PIT
GO AROUND Button	Takeoff (on ground) Go Around (in air)	TO GA	Takeoff (on ground) Go Around (in air)	TO GA
ALT Key	Roll Hold (default)	ROL	Altitude Hold	ALT
VS Key	Roll Hold (default)	ROL	Vertical Speed	VS
VNV Key	Roll Hold (default)	ROL	Vertical Path Tracking ¹	VPTH
NAV Key	Navigation ²	GPS VOR LOC	Pitch Hold (default)	PIT
APR Key	Approach ²	GPS VOR LOC	Pitch Hold (default)	PIT GP GS
HDG Key	Heading Select	HDG	Pitch Hold (default)	PIT

¹ A valid VNV Flight Plan must be entered before **VNV** Key press activates the flight director.

² The selected navigation receiver must have a valid VOR or LOC signal or active GPS course before **NAV** or **APR** Key press activates the flight director.

Table 7-1 Flight Director Activation

AFCS STATUS BOX

Flight Director mode annunciations are displayed on the PFD when the Flight Director is active. Autopilot status is displayed in the center of the AFCS Status Box. Lateral Flight Director modes are displayed on the left and Vertical Modes on the right. Armed modes are annunciated in white and active in green.

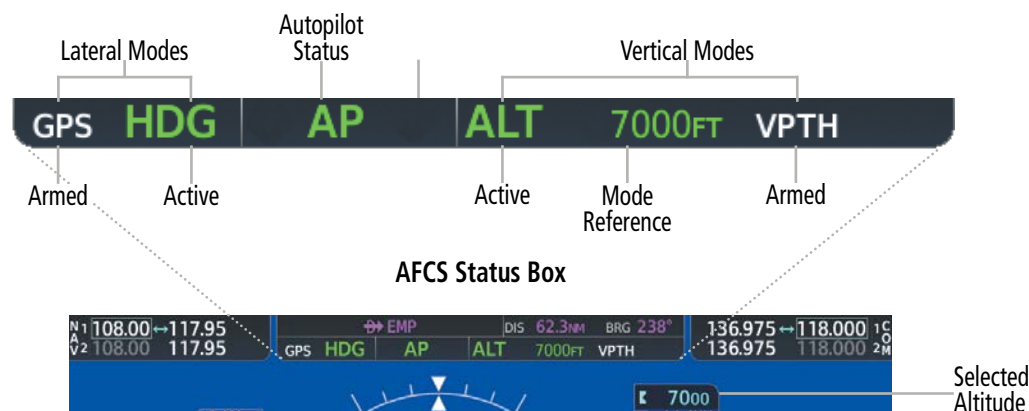


Figure 7-2 PFD AFCS Display

FLIGHT DIRECTOR MODES

Flight Director modes are normally selected independently for the pitch and roll axes. Unless otherwise specified, all mode keys are alternate action (i.e., press on, press off). In the absence of specific mode selection, the Flight Director reverts to the default pitch and/or roll mode(s).

Armed modes are annunciated in white and active in green in the AFCS Status Box. Under normal operation, when the control for the active Flight Director mode is pressed, the Flight Director reverts to the default mode(s) for the axis(es). Automatic transition from armed to active mode is indicated by the white armed mode annunciation moving to the green active mode field and flashing for 10 seconds.

If the information required to compute a Flight Director mode becomes invalid or unavailable, the Flight Director automatically reverts to the default mode for that axis. A flashing yellow mode annunciation and annunciator light indicate loss of sensor (ADC) or navigation data (VOR, LOC, GPS, VNV, SBAS) required to compute commands. When such a loss occurs, the system automatically begins to roll the wings level (enters Roll Hold Mode) or maintain the pitch angle (enters Pitch Hold Mode), depending on the affected axis. The flashing annunciation stops when the affected mode key is pressed or another mode for the axis is selected. If after 10 seconds no action is taken, the flashing annunciation stops.



Figure 7-3 Loss of GPS Signal

The flight director is automatically disabled if the attitude information required to compute the default flight director modes becomes invalid or unavailable.

COMMAND BARS

Upon activation of the Flight Director, Command Bars are displayed on the PFD as a single magenta cue. The Command Bars move together vertically to indicate pitch commands and bank left or right to indicate roll commands. The Command Bars do not override the aircraft symbol.

If the attitude information sent to the Flight Director becomes invalid or unavailable, the Command Bars are removed from the display. The Flight Director Command Bars also disappear if either pitch exceeds $+30^{\circ}/-20^{\circ}$ or bank exceeds 65° .

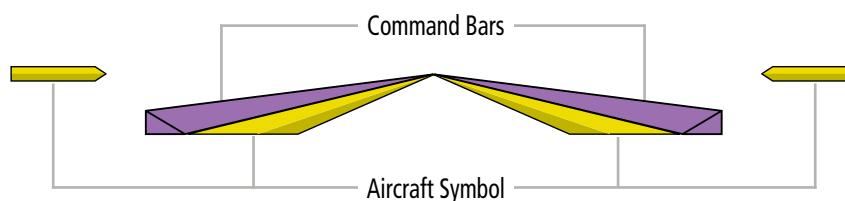


Figure 7-4 Single-cue Command Bars

7.4 AFCS MODES

The AFCS is capable of operating in a variety of independent Lateral Modes, Vertical Modes and Combination of both the Lateral and Vertical Modes.

VERTICAL MODES

The following table lists the vertical modes with their corresponding controls and annunciations. The mode reference is displayed next to the active mode annunciation for Altitude Hold, Vertical Speed, and Flight Level Change modes. The **NOSE UP/DN** Keys can be used to change the vertical mode reference while operating under Pitch Hold, Vertical Speed, or Flight Level Change Mode.

Vertical Mode	Description	Control	Annunciation	Reference Range	Reference Change Increment
Pitch Hold	Holds the current aircraft pitch attitude; may be used to climb/descend to the Selected Altitude	(default)	PIT	-15° to +16°	0.5°
Selected Altitude Capture	Captures the Selected Altitude	¹	ALTS		
Altitude Hold	Holds the current Altitude Reference	ALT Key	ALT	nnnnn FT	
Vertical Speed	Maintains the current aircraft vertical speed; may be used to climb/descend to the Selected Altitude	VS Key	VS	nnnn FPM	-3000 to +1500 fpm 100 fpm
Flight Level Change	Maintains the current aircraft airspeed while the aircraft is climbing/descending to the Selected Altitude	FLC Key	FLC	nnn KT	90 to 185 kt 1 kt

¹ *ALTS is armed automatically when PIT, VS, FLC, TO, or GA active, and under VPTH when Selected Altitude is to be captured instead of VNV Target Altitude*

Table 7-2 Flight Director Vertical Modes

PITCH HOLD MODE (PIT)

When the flight director is activated (the **FD** Key is pressed), Pitch Hold Mode is selected by default. Pitch Hold Mode is indicated as the active vertical mode by the 'PIT' annunciation. This mode may be used for climb or descent to the Selected Altitude (shown above the Altimeter), since Selected Altitude Capture Mode is automatically armed when Pitch Hold Mode is activated.

In Pitch Hold Mode, the flight director maintains a constant pitch attitude, the pitch reference. The pitch reference is set to the aircraft pitch attitude at the moment of mode selection. If the aircraft pitch attitude exceeds the flight director pitch command limitations, the flight director commands a pitch angle equal to the nose-up/down limit.

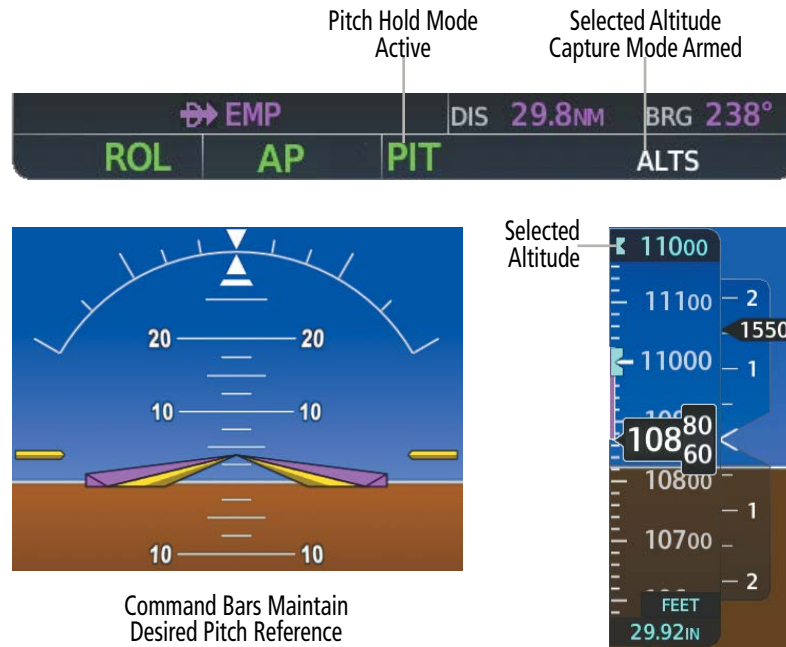


Figure 7-5 Pitch Hold Mode

CHANGING THE PITCH REFERENCE

When operating in Pitch Hold Mode, the pitch reference can be adjusted by:

- Using the **NOSE UP/DN** Keys
- Pressing the **CWS** Button, hand-flying the aircraft to establish a new pitch reference, then releasing the **CWS** Button

SELECTED ALTITUDE CAPTURE MODE (ALTS)

Selected Altitude Capture Mode is automatically armed with activation of the following modes:

- » Pitch Hold
- » Vertical Speed
- » Flight Level Change
- » Takeoff/Go Around (if the Selected Altitude is at least 400 feet above the current aircraft altitude)
- » Vertical Path Tracking (if the Selected Altitude is to be captured instead of the VNV Target Altitude)

The white 'ALTS' annunciation indicates Selected Altitude Capture Mode is armed (see previous figure for example). The **ALT SEL** Knob is used to set the Selected Altitude (shown above the Altimeter) until Selected Altitude Capture Mode becomes active.

As the aircraft nears the Selected Altitude, the flight director automatically transitions to Selected Altitude Capture Mode with Altitude Hold Mode armed (next figure). This automatic transition is indicated by the green 'ALTS' annunciation flashing for up to 10 seconds and the appearance of the white 'ALT' annunciation. The Selected Altitude is shown as the Altitude Reference beside the 'ALTS' annunciation.

At 50 feet from the Selected Altitude, the flight director automatically transitions from Selected Altitude Capture to Altitude Hold Mode and holds the Selected Altitude (shown as the Altitude Reference). As Altitude Hold Mode becomes active, the white 'ALT' annunciation moves to the active vertical mode field and flashes green for 10 seconds to indicate the automatic transition.

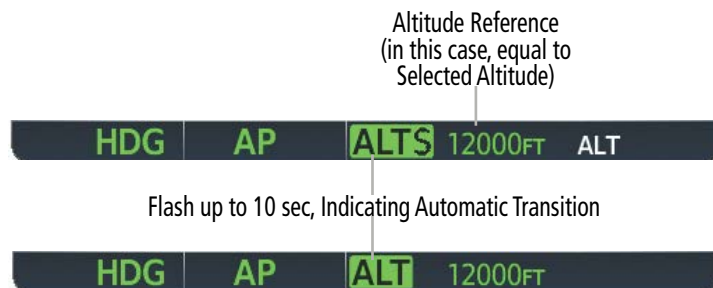


Figure 7-6 Automatic Mode Transitions During Altitude Capture

CHANGING THE SELECTED ALTITUDE



NOTE: Pressing the **CWS** Button while in Selected Altitude Capture Mode does not cancel the mode.

Use of the **ALT SEL** Knob to change the Selected Altitude while Selected Altitude Capture Mode is active causes the flight director to revert to Pitch Hold Mode with Selected Altitude Capture Mode armed for the new Selected Altitude.

ALTITUDE HOLD MODE (ALT)

Altitude Hold Mode can be activated by pressing the **ALT** Key; the flight director maintains the current aircraft altitude (to the nearest 10 feet) as the Altitude Reference. The flight director's Altitude Reference, shown in the AFCS Status Box, is independent of the Selected Altitude, displayed above the Altimeter. Altitude Hold Mode active is indicated by a green 'ALT' annunciation in the AFCS Status Box.

Altitude Hold Mode is automatically armed when the flight director is in Selected Altitude Capture Mode. Selected Altitude Capture Mode automatically transitions to Altitude Hold Mode when the altitude error is less than 50 feet. In this case, the Selected Altitude becomes the flight director's Altitude Reference.

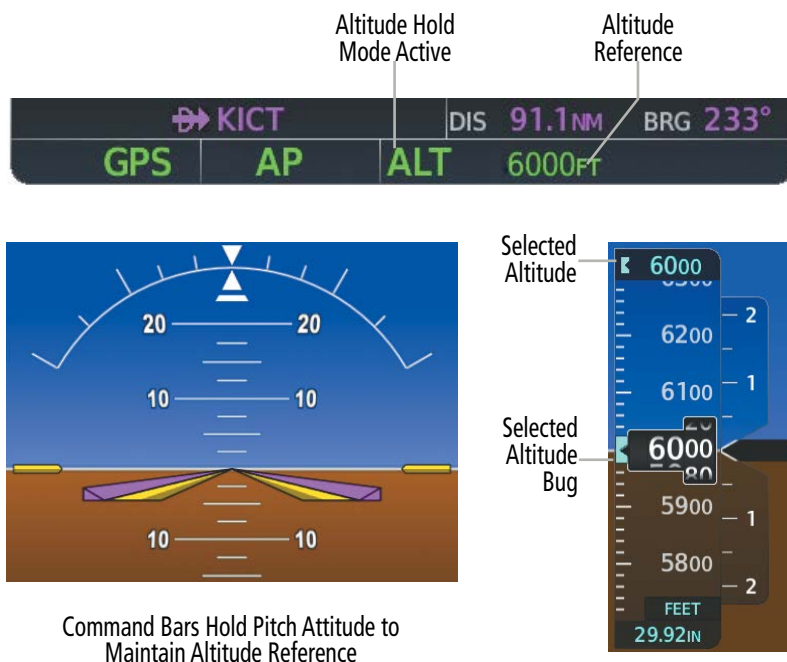


Figure 7-7 Altitude Hold Mode

CHANGING THE ALTITUDE REFERENCE



NOTE: Turning the **ALT SEL** Knob while in Altitude Hold Mode changes the Selected Altitude, but not the flight director's Altitude Reference, and does not cancel the mode.

With the **CWS** Button depressed, the aircraft can be hand-flown to a new Altitude Reference. When the **CWS** Button is released at the desired altitude, the new altitude is established as the Altitude Reference.

VERTICAL SPEED MODE (VS)

In Vertical Speed Mode, the flight director acquires and maintains a Vertical Speed Reference. Current aircraft vertical speed (to the nearest 100 fpm) becomes the Vertical Speed Reference at the moment of Vertical Speed Mode activation. This mode may be used for climb or descent to the Selected Altitude (shown above the Altimeter) since Selected Altitude Capture Mode is automatically armed when Vertical Speed Mode is selected.

When Vertical Speed Mode is activated by pressing the **VS** Key, 'VS' is annunciated in green in the AFCS Status Box along with the Vertical Speed Reference. The Vertical Speed Reference is also displayed above the Vertical Speed Indicator. A Vertical Speed Reference Bug corresponding to the Vertical Speed Reference is shown on the indicator.

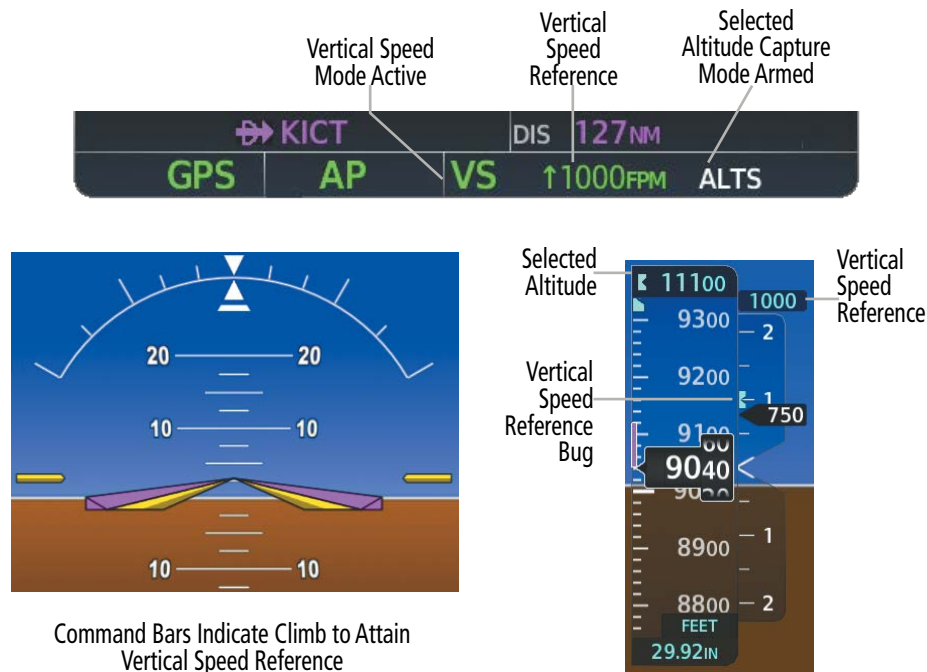


Figure 7-8 Vertical Speed Mode

CHANGING THE VERTICAL SPEED REFERENCE

The Vertical Speed Reference (shown both in the AFCS Status Box and above the Vertical Speed Indicator) may be changed by:

- Using the **NOSE UP/NOSE DN** Keys
- Pressing the **CWS** Button, hand-flying the aircraft to attain a new Vertical Speed Reference, then releasing the **CWS** Button



NOTE: If the Selected Altitude is reached during CWS maneuvering, the Altitude Reference is not changed. To adjust the Altitude Reference in this case, the **CWS** Button must be pressed again after the Selected Altitude is reached.

FLIGHT LEVEL CHANGE MODE (FLC)



NOTE: The Selected Altitude should be set before selecting Flight Level Change Mode.

Flight Level Change Mode is selected by pressing the **FLC** Key. This mode acquires and maintains the Airspeed Reference while climbing or descending to the Selected Altitude (shown above the Altimeter). When Flight Level Change Mode is active, the flight director continuously monitors Selected Altitude, airspeed, and altitude.

The Airspeed Reference is set to the current airspeed upon mode activation. Flight Level Change Mode is indicated by a green 'FLC' annunciation beside the Airspeed Reference in the AFCS Status Box. The Airspeed Reference is also displayed directly above the Airspeed Indicator, along with a bug corresponding to the Airspeed Reference along the tape.

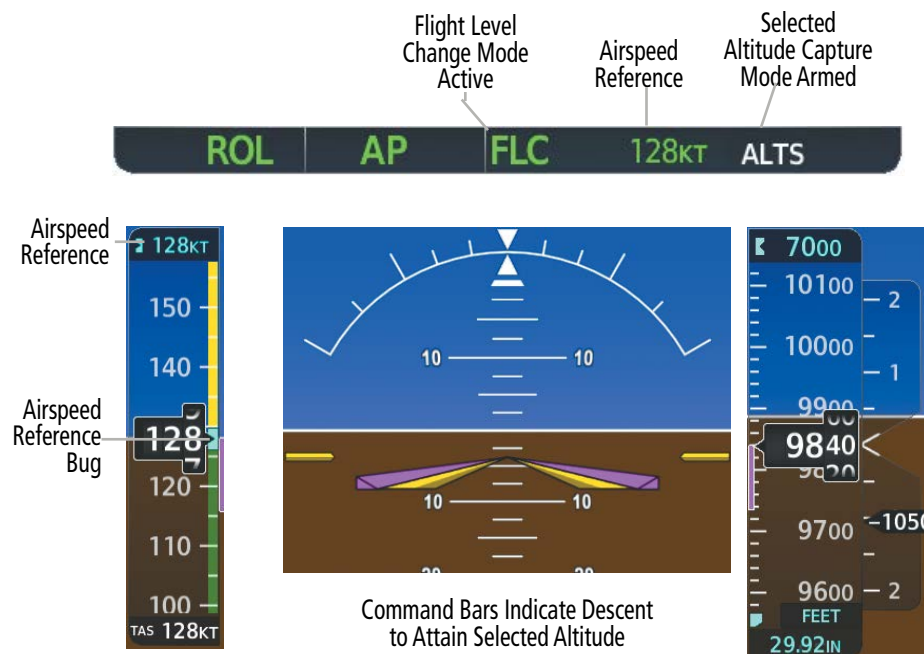


Figure 7-9 Flight Level Change Mode

Engine power must be adjusted to allow the autopilot to fly the aircraft at a pitch attitude corresponding to the desired flight profile (climb or descent) while maintaining the Airspeed Reference. The flight director maintains the current altitude until either engine power or the Airspeed Reference are adjusted and does not allow the aircraft to climb or descend away from the Selected Altitude.

CHANGING THE AIRSPEED REFERENCE

The Airspeed Reference (shown in both the AFCS Status Box and above the Airspeed Indicator) may be adjusted by:

- Using the **NOSE UP/NOSE DN** Keys
- Pressing the **CWS** Button, hand-flying the aircraft to attain a new Airspeed Reference, then releasing the **CWS** Button

NOTE: If the Selected Altitude is reached during CWS maneuvering, the Airspeed Reference is not changed. To adjust the Airspeed Reference in this case, the **CWS** Button must be pressed again after the Selected Altitude is reached.

LATERAL MODES

The following table relates each Garmin AFCS lateral mode to its respective control and annunciation. Refer to the combination modes section for information regarding Takeoff and Go Around modes.

Lateral Mode	Description	Control	Annunciation	Maximum Roll Command Limit
Roll Hold	Holds the current aircraft roll attitude or rolls the wings level, depending on the commanded bank angle	(default)	ROL	25°
Heading Select	Captures and tracks the Selected Heading	HDG Key	HDG	25°
Navigation, GPS	Captures and tracks the selected navigation source (GPS, VOR, LOC)	NAV Key	GPS	25°
Navigation, VOR Enroute Arm/Capture/Track			VOR	25° Capture 10° Track
Navigation, LOC Capture/Track (No Glideslope)			LOC	25° Capture 10° Track

Table 7-3 Flight Director Lateral Modes

The **CWS** Button does not change lateral references for Heading Select or Navigation Mode. The autopilot guides the aircraft back to the Selected Heading/Course upon release of the **CWS** Button.

ROLL HOLD MODE (ROL)

NOTE: If Roll Hold Mode is activated as a result of a mode reversion, the flight director rolls the wings level.

When the flight director is activated or switched, Roll Hold Mode is selected by default. This mode is annunciated as ‘ROL’ in the AFCS Status Box. The current aircraft bank angle is held, subject to the bank angle condition.



Figure 7-10 Roll Hold Mode Annunciation

Bank Angle	Flight Director Response
< 6°	Rolls wings level
6 to 25°	Maintains current aircraft roll attitude
> 25°	Limits bank to 25°

Table 7-4 Roll Hold Mode Responses

CHANGING THE ROLL REFERENCE

The roll reference can be changed by pressing the **CWS** Button, establishing the desired bank angle, then releasing the **CWS** Button.

HEADING SELECT MODE (HDG)

Heading Select Mode is activated by pressing the **HDG** Key. Heading Select Mode acquires and maintains the Selected Heading. The Selected Heading is shown by a cyan bug on the HSI and in the box to the upper left of the HSI.

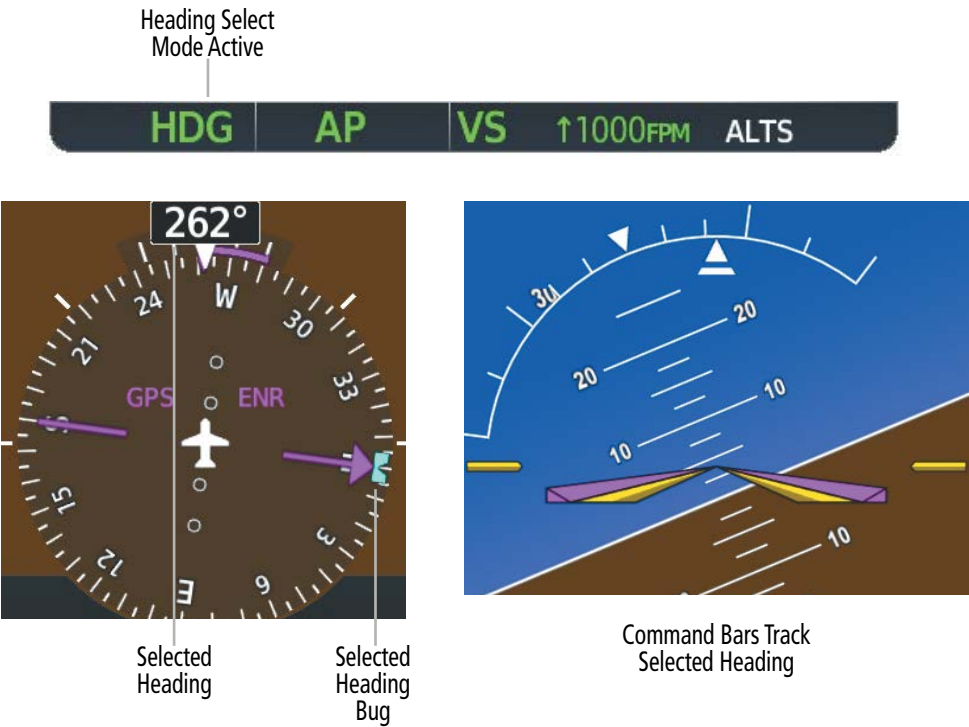


Figure 7-11 Heading Select Mode

CHANGING THE SELECTED HEADING



NOTE: Pressing the **HDG** Knob synchronizes the Selected Heading to the current heading.

The Selected Heading is adjusted using the **HDG** Knob. Pressing the **CWS** Button and hand-flying the aircraft does not change the Selected Heading. The autopilot guides the aircraft back to the Selected Heading upon release of the **CWS** Button.

Turns are commanded in the same direction as Selected Heading Bug movement, even if the bug is turned more than 180° from the present heading (e.g., a 270° turn to the right). However, Selected Heading changes of more than 330° at a time result in turn reversals.

NAVIGATION MODES (GPS, VOR, LOC)



NOTE: The selected navigation receiver must have a valid VOR or LOC signal or active GPS course for the flight director to enter Navigation Mode.

Pressing the **NAV** Key selects Navigation Mode. Navigation Mode acquires and tracks the selected navigation source (GPS, VOR, LOC). The flight director follows GPS roll steering commands when GPS is the selected navigation source. When the navigation source is VOR or LOC, the flight director creates roll steering commands from the Selected Course and deviation. Navigation Mode can also be used to fly non-precision GPS and LOC approaches where vertical guidance is not required.

If the Course Deviation Indicator (CDI) shows greater than one dot when the **NAV** Key is pressed, the selected mode is armed. If the CDI shows less than one dot, Navigation Mode is automatically captured when the **NAV** Key is pressed. The armed annunciation appears in white to the left of the active lateral mode.



Figure 7-12 GPS Navigation Mode Armed

When the CDI has automatically switched from GPS to LOC during a LOC/ILS approach, GPS Navigation Mode remains active, providing GPS steering guidance until the localizer signal is captured. LOC Navigation Mode is armed automatically when the navigation source switch takes place if the **APR** Key is not pressed prior to the automatic source switch.

If Navigation Mode is active and either of the following occur, the flight director reverts to Roll Hold Mode (wings rolled level):

- » Different VOR tuned while in VOR Navigation Mode (VOR Navigation Mode reverts to armed)
- » Navigation source manually switched (with the **CDI** Softkey)
- » During a LOC/ILS approach, the FAF is crossed while in GPS Navigation Mode after the automatic navigation source switch from GPS to LOC

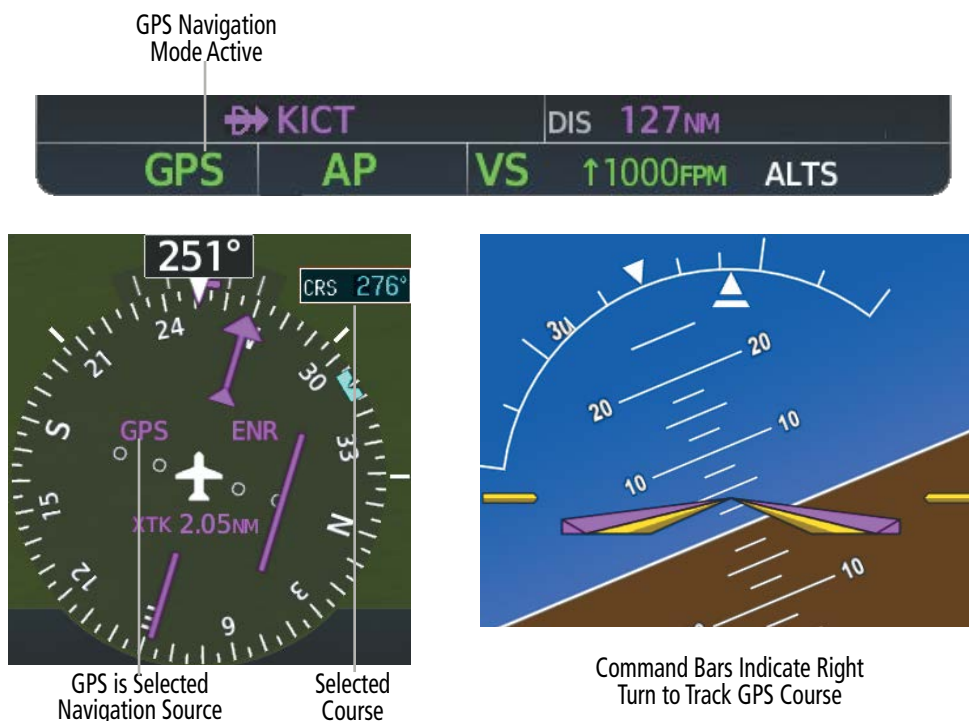


Figure 7-13 Navigation Mode

CHANGING THE SELECTED COURSE

If the navigation source is VOR or localizer or OBS Mode has been enabled when using GPS, the Selected Course is controlled using the **CRS** Knob. Pressing the **CWS** Button and hand-flying the aircraft does not change the Selected Course while in Navigation Mode. The autopilot guides the aircraft back to the Selected Course (or GPS flight plan) when the **CWS** Button is released.

COMBINATION MODES

The following table lists the modes that operating by using both Vertical and Lateral Modes with their corresponding controls and annunciations.

Mode	Description	Control	Annunciation	Maximum Roll Command Limit	Reference Range
Vertical Navigation Modes					
Vertical Path Tracking	Captures and tracks descent legs of an active vertical profile	VNV Key	VPTH		
VNV Target Altitude Capture	Captures the Vertical Navigation (VNV) Target Altitude	1	ALTV		
Approach Modes					
VOR Approach Arm/Capture/Track	Captures and tracks the VOR navigation source	APR Key	VAPP	25°	
GPS Approach Arm/Capture/Track	Captures and tracks the GPS navigation source		GPS	25°	
Glidepath	Captures and tracks the SBAS glidepath on approach		GP		
LOC Approach Arm/Capture/Track (Glideslope Mode automatically armed)	Captures and tracks the LOC navigation source		LOC	25°	
Glideslope	Captures and tracks the ILS glideslope on approach		GS		
Additional Modes					
Takeoff	Commands a constant pitch angle and wings level on the ground in preparation for takeoff	GO AROUND Button	TO		6°
Go Around ²	Commands a constant pitch angle and wings level in the air		GA		6°

¹ ALTV is armed automatically under VPTH when VNV Target Altitude is to be captured instead of Selected Altitude.

² Go Around Mode disengages the autopilot unless a compatible lift computer is installed.

Table 7-5 Flight Director Combination Modes

VERTICAL NAVIGATION MODES

 **NOTE:** VNV is disabled when parallel track or Dead Reckoning Mode is active.

 **NOTE:** The Selected Altitude takes precedence over any other vertical constraints.

Vertical Navigation (VNV) flight control is available for enroute/terminal cruise and descent operations any time that VNV flight planning is available. Refer to the GPS Navigation Section for more information on VNV flight plans. Conditions for availability include, but are not limited to:

- » The selected navigation source is GPS.
- » A VNV flight plan (with at least one altitude-constrained waypoint) or vertical direct-to is active.
- » VNV is enabled (**VNV** Softkey pressed on the MFD).
- » Crosstrack error is valid and within certain limits.
- » Desired/actual track are valid or track angle error is within certain limits.
- » The VNV Target Altitude of the active waypoint is no more than 250 ft above the current aircraft altitude.

The flight director may be armed for VNV at any time, but no target altitudes are captured during a climb. The Command Bars provide vertical profile guidance based on specified altitudes (entered manually or loaded from the database) at waypoints in the active flight plan or vertical direct-to. The appropriate VNV flight control modes are sequenced by the flight director to follow the path defined by the vertical profile. Upon reaching the last waypoint in the VNV flight plan, the flight director transitions to Altitude Hold Mode and cancels any armed VNV modes.

VERTICAL PATH TRACKING MODE (VPTH)

 **NOTE:** If another vertical mode key is pressed while Vertical Path Tracking Mode is selected, Vertical Path Tracking Mode reverts to armed.

 **NOTE:** Pressing the **CWS** Button while Vertical Path Tracking Mode is active does not cancel the mode. The autopilot guides the aircraft back to the descent path upon release of the **CWS** Button.

When a vertical profile (VNV flight plan) is active and the **VNV** Key is pressed, Vertical Path Tracking Mode is armed in preparation for descent path capture. ‘VPTH’ (or ‘V’ when Glidepath or Glideslope Mode is concurrently armed) is annunciated in white in addition to previously armed modes. If applicable, the appropriate altitude capture mode is armed for capture of the next VNV Target Altitude (ALTV) or the Selected Altitude (ALTS), whichever is greater.




Figure 7-14 Vertical Path Tracking Armed Annunciations

Prior to descent path interception, the Selected Altitude must be set below the current aircraft altitude by at least 75 feet. For the flight director to transition from Altitude Hold to Vertical Path Tracking Mode, acknowledgment is required within five minutes of descent path interception by:

- Pressing the **VNV** Key
- Adjusting the Selected Altitude

If acknowledgment is not received within one minute of descent path interception, the white 'VPTH' annunciation starts to flash. Flashing continues until acknowledged or the descent path is intercepted. If the descent is not confirmed by the time of interception, Vertical Path Tracking Mode remains armed and the descent is not captured.

In conjunction with the "TOD [top of descent] within 1 minute" annunciation in the Navigation Status Box and the "Vertical track" voice message, VNV indications (VNV Target Altitude, vertical deviation, and vertical speed required) appear on the PFD in magenta.

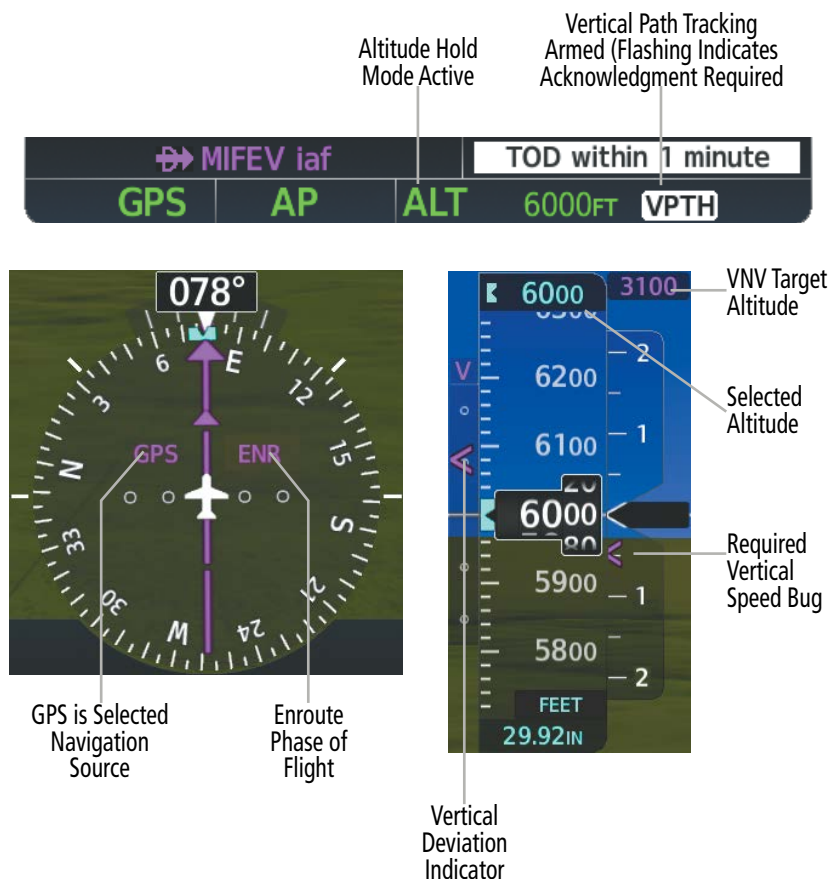


Figure 7-15 Vertical Path Capture

When a descent leg is captured (i.e., vertical deviation becomes valid), Vertical Path Tracking becomes active and tracks the descent profile (next figure). An altitude capture mode ('ALTS' or 'ALTV') is armed as appropriate.

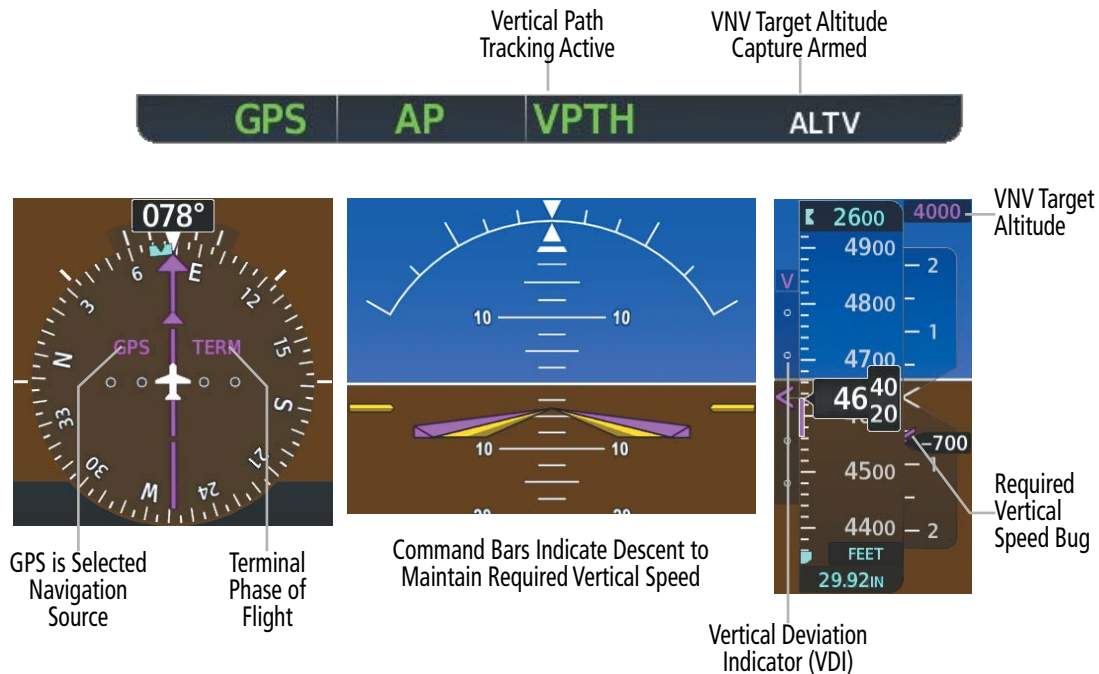


Figure 7-16 Vertical Path Tracking Mode

If the altimeter barometric setting is adjusted while Vertical Path Tracking is active, the flight director increases/decreases the descent rate by up to 500 fpm to re-establish the aircraft on the descent path (without commanding a climb). Adjusting the altimeter barometric setting creates discontinuities in VNV vertical deviation, moving the descent path. For large adjustments, it may take several minutes for the aircraft to re-establish on the descent path. If the change is made while nearing a waypoint with a VNV Target Altitude, the aircraft may not re-establish on the descent path in time to meet the vertical constraint.

Automatic Reversion to Pitch Hold Mode

Several situations can occur while Vertical Path Tracking Mode is active which cause the flight director to revert to Pitch Hold Mode:

- ➔ Vertical deviation exceeds 200 feet during an overspeed condition.
- ➔ Vertical deviation experiences a discontinuity that both exceeds 200 feet in magnitude and results in the vertical deviation exceeding 200 feet in magnitude. Such discontinuities are usually caused by flight plan changes that affect the vertical profile.
- ➔ Vertical deviation becomes invalid (the Vertical Deviation Indicator is removed from the PFD).
- ➔ A display enters Reversionary Mode (this does not apply to an active vertical direct-to).

Unless VNV is disabled, Vertical Path Tracking Mode and the appropriate altitude capture mode become armed following the reversion to Pitch Hold Mode to allow for possible profile recapture.

Non-Path Descents

Pitch Hold, Vertical Speed, and Flight Level Change modes can also be used to fly non-path descents while VNV flight control is selected. If the **VS** or **FLC** Key is pressed while Vertical Path Tracking Mode is selected, Vertical Path Tracking Mode reverts to armed along with the appropriate altitude capture mode to allow profile re-capture.



Figure 7-17 Flight Level Change VNV Non-Path Descent

To prevent immediate profile re-capture, the following must be satisfied:

- ➔ At least 10 seconds have passed since the non-path transition was initiated
- ➔ Vertical deviation from the profile has exceeded 250 feet, but is now less than 200 feet

Pressing the **VNV** Key twice re-arms Vertical Path Tracking for immediate profile re-capture.

VNV TARGET ALTITUDE CAPTURE MODE (ALTV)



NOTE: Armed VNV Target Altitude Capture and Selected Altitude Capture modes are mutually exclusive. However, Selected Altitude Capture Mode is armed implicitly (not annunciated) whenever VNV Target Altitude Capture Mode is armed.

VNV Target Altitude Capture is analogous to Selected Altitude Capture Mode and is armed automatically after the **VNV** Key is pressed and the next VNV Target Altitude is to be intercepted before the Selected Altitude. The annunciation 'ALTV' indicates the VNV Target Altitude is to be captured. VNV Target Altitudes are shown in the active flight plan or vertical direct-to, and can be entered manually or loaded from a database (see the GPS Navigation Section for details). At the same time as "TOD within 1 minute" is annunciated in the Navigation Status Box, the active VNV Target Altitude is displayed above the Vertical Speed Indicator.

As the aircraft nears the VNV Target Altitude, the flight director automatically transitions to VNV Target Altitude Capture Mode with Altitude Hold Mode armed. This automatic transition is indicated by the green 'ALTV' annunciation flashing for up to 10 seconds and the appearance of the white 'ALT' annunciation. The VNV Target Altitude is shown as the Altitude Reference beside the 'ALTV' annunciation and remains displayed above the Vertical Speed Indicator. The Required Vertical Speed Indication (RVSI) is removed once VNV Target Altitude Capture Mode becomes active.

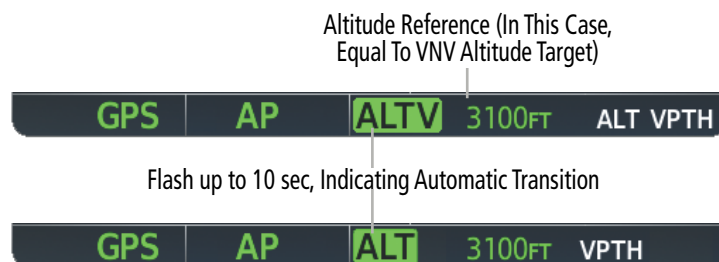


Figure 7-18 Automatic Mode Transitions During Altitude Capture

At 50 feet from the VNV Target Altitude, the flight director automatically transitions from VNV Target Altitude Capture to Altitude Hold Mode and tracks the level leg. As Altitude Hold Mode becomes active, the white 'ALT' annunciation moves to the active vertical mode field and flashes green for 10 seconds to indicate the automatic transition. The flight director automatically arms Vertical Path Tracking, allowing upcoming descent legs to be captured and subsequently tracked.

Changing the VNV Target Altitude



NOTE: Pressing the **CWS** Button while in VNV Target Altitude Capture Mode does not cancel the mode.

Changing the current VNV Target Altitude while VNV Target Altitude Capture Mode is active causes the flight director to revert to Pitch Hold Mode. Vertical Path Tracking and the appropriate altitude capture mode are armed in preparation to capture the new VNV Target Altitude or the Selected Altitude, depending on which altitude is to be intercepted first.

VNV target altitudes can be changed while editing the active flight plan (see the Flight Management Section for details).

APPROACH MODES



WARNING: Do not rely on the autopilot to level the aircraft at the MDA/DH when flying an approach with vertical guidance. The autopilot will not level the aircraft at the MDA/DH even if the MDA/DH is set in the altitude preselect.



NOTE: The selected navigation receiver must have a valid VOR or LOC signal or active GPS course for the flight director to enter Approach Mode.

Approach Mode is activated when the **APR** Key is pressed. Approach Mode acquires and tracks the selected navigation source (GPS, VOR, or LOC), depending on loaded approach. This mode uses the selected navigation receiver deviation and desired course inputs to fly the approach. Pressing the **APR** Key when the CDI is greater than one dot arms the selected approach mode (annunciated in white to the left of the active lateral mode). If the CDI is less the 1 dot, the selected approach is automatically captured when the **APR** Key is pressed.

VOR APPROACH MODE (VAPP)

VOR Approach Mode provides greater sensitivity for signal tracking than VOR Navigation Mode.

Selecting VOR Approach Mode:

- 1) Ensure a valid VOR frequency is tuned.
- 2) Ensure that VOR is the selected navigation source (use the **CDI** Softkey to cycle through navigation sources if necessary).
- 3) Press the **APR** Key.

GPS APPROACH MODE

When GPS Approach Mode is armed, Glidepath Mode is also armed (if a glidepath is available). GPS Approach Mode can be utilized to fly non-precision and precision approaches.

Selecting GPS Approach Mode:

- 1) Ensure a GPS approach is loaded into the active flight plan. The active waypoint must be part of the flight plan (cannot be a direct-to a waypoint not in the flight plan).
- 2) Ensure that GPS is the selected navigation source (use the **CDI** Softkey to cycle through navigation sources if necessary).
- 3) Press the **APR** Key.



Figure 7-19 GPS Approach Mode Active

GLIDEPATH MODE (GP)



NOTE: Some RNAV (GPS) approaches provide a vertical descent angle as an aid in flying a stabilized approach. These approaches are NOT considered Approaches with Vertical Guidance (APV). Approaches that are annunciated on the HSI as 'LNAV+V' or 'LP+V' should be flown in compliance with any stepdown altitude constraints and to an MDA, until visual reference with the landing environment is established, even though vertical glidepath (GP) information may be provided.



WARNING: When flying an LNAV approach (with vertical descent angle) with the autopilot coupled, the aircraft will not level off at the MDA even if the MDA is set in the altitude preselect.

Glidepath Mode is used to track the SBAS-based glidepath. When Glidepath Mode is armed, 'GP' is annunciated in white in the AFCS Status Box.

Selecting Glidepath Mode:

- 1) Ensure a GPS approach is loaded into the active flight plan. The active waypoint must be part of the flight plan (cannot be a direct-to a waypoint not in the flight plan).
- 2) Ensure that GPS is the selected navigation source (use the **CDI** Softkey to cycle through navigation sources if necessary).
- 3) Press the **APR** Key.



Figure 7-20 Glidepath Mode Armed

Upon reaching the glidepath, the flight director transitions to Glidepath Mode and begins to capture and track the glidepath.

Once the following conditions have been met, the glidepath can be captured:

- A GPS approach providing vertical guidance (LNAV/VNAV, LNAV+V, LPV, LP+V) is loaded into the active flight plan.
- The active waypoint is at or after the final approach fix (FAF).
- Vertical deviation is valid.
- The CDI is at less than full-scale deviation
- Automatic sequencing of waypoints has not been suspended (no 'SUSP' annunciation on the HSI)



NOTE: Pressing the **CWS** Button while Glidepath Mode is active does not cancel the mode. The autopilot guides the aircraft back to the glidepath upon release of the **CWS** Button.

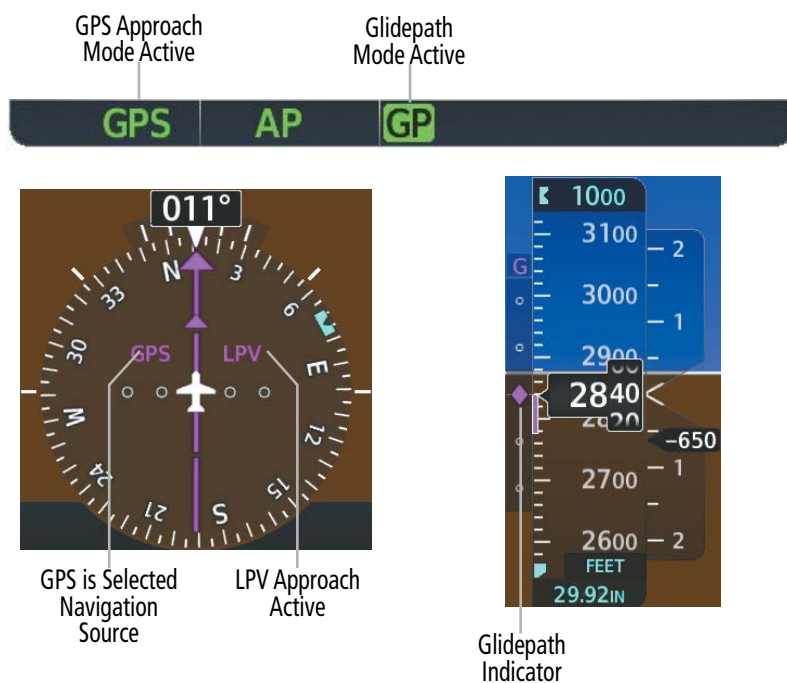


Figure 7-21 Glidepath Mode

LOCALIZER APPROACH MODE (LOC)

LOC Approach Mode allows the autopilot to fly a Localizer Approach (i.e., without a glideslope) or an ILS Approach (i.e., with a glideslope). When LOC Approach Mode is armed, Glideslope Mode is also armed automatically. LOC captures are inhibited if the difference between aircraft heading and localizer course exceeds 105°.

LOC Approach Mode also allows the autopilot to fly a Backcourse Approach, capturing and tracking a localizer signal in the backcourse direction. When making a Backcourse Approach, set the Selected Course to the localizer front course.



NOTE: When making a Backcourse Approach, set the Selected Course to the localizer front course.

Selecting LOC Approach Mode:

- 1) Ensure a valid localizer frequency is tuned.
- 2) Ensure that LOC is the selected navigation source (use the **CDI** Softkey to cycle through navigation sources if necessary).
- 3) Press the **APR** Key.

Or:

- 1) Ensure that GPS is the selected navigation source (use the **CDI** Softkey to cycle through navigation sources if necessary).
- 2) Ensure a LOC/ILS approach is loaded into the active flight plan.
- 3) Ensure the corresponding LOC frequency is tuned.
- 4) Press the **APR** Key.

**Figure 7-22 LOC Mode Armed**

If the following occurs, the flight director reverts to Roll Hold Mode (wings rolled level):

- Approach Mode is active and a Vectors-To-Final is activated
- Approach Mode is active and Navigation source is manually switched
- During a LOC/ILS approach, GPS Navigation Mode is active and the FAF is crossed after the automatic navigation source switch from GPS to LOC

Changing the Selected Course

If the navigation source is VOR or LOC or OBS Mode has been enabled when using GPS, the Selected Course is controlled using the **CRS** Knob.

Pressing the **CWS** Button and hand-flying the aircraft does not change the Selected Course while in Approach Mode. The autopilot guides the aircraft back to the Selected Course (or GPS flight plan) when the **CWS** Button is released.

GLIDESLOPE MODE (GS)

Glideslope Mode is available for LOC/ILS approaches to capture and track the glideslope. When Glideslope Mode is armed (annunciated as 'GS' in white), LOC Approach Mode is armed as the lateral flight director mode.

Selecting Glideslope Mode:

- 1) Ensure a valid localizer frequency is tuned.
- 2) Ensure that LOC is the selected navigation source (use the **CDI** Softkey to cycle through navigation sources if necessary).
- 3) Press the **APR** Key.

Or:

- 1) Ensure that GPS is the selected navigation source (use the **CDI** Softkey to cycle through navigation sources if necessary).
- 2) Ensure a LOC/ILS approach is loaded into the active flight plan.
- 3) Ensure the corresponding LOC frequency is tuned.
- 4) Press the **APR** Key.

Once LOC is the navigation source, the localizer and glideslope can be captured. Upon reaching the glideslope, the flight director transitions to Glideslope Mode and begins to capture and track the glideslope.

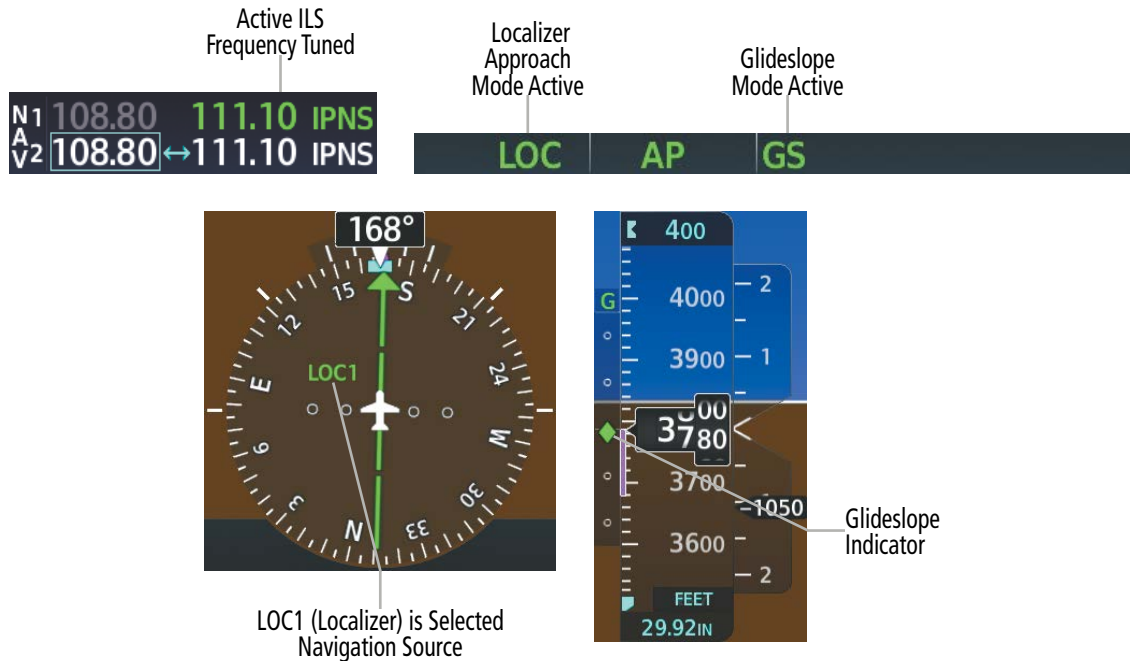


Figure 7-23 Glideslope Mode



NOTE: Pressing the **CWS** Button while Glideslope Mode is active does not cancel the mode. The autopilot guides the aircraft back to the glideslope upon release of the **CWS** Button.

INTERCEPTING AND FLYING A DME ARC

The AFCS will intercept and track a DME arc that is part of the active flight plan provided that GPS Navigation Mode is engaged, GPS is the active navigation source on the CDI, and the DME arc segment is the active flight plan leg. It is important to note that automatic navigation of DME arcs is based on GPS. Thus, even if the **APR** key is pressed and LOC or VOR Approach Mode is armed prior to reaching the Initial Approach Fix (IAF), Approach Mode will not activate until the arc segment is completed.

If the pilot decides to intercept the arc at a location other than the published IAF (i.e. ATC provides vectors to intercept the arc) and subsequently selects Heading Mode or Roll Mode, the AFCS will not automatically intercept or track the arc unless the pilot activates the arc leg of the flight plan and arms GPS Navigation Mode. The AFCS will not intercept and fly a DME arc before reaching an IAF that defines the beginning of the arc segment. Likewise, if at any point while established on the DME arc the pilot deselects GPS Navigation Mode, the AFCS will no longer track the arc.

TAKEOFF (TO) AND GO AROUND (GA) MODES

Takeoff and Go Around modes are coupled pitch and roll modes and are annunciated as both the vertical and lateral modes when active. In these modes, the flight director commands a constant set pitch attitude and wings level. The **GO AROUND** Button is used to select both modes. The mode entered by the flight director depends on whether the aircraft is on the ground.

Takeoff Mode provides an attitude reference during rotation and takeoff. This mode can be selected only while on the ground by pushing the **GO AROUND** Button. The flight director Command Bars assume a wings-level, pitch-up attitude.

Pressing the **GO AROUND** Button while in the air activates the flight director in wings level, pitch-up attitudes, allowing the execution of a missed approach or a go around.

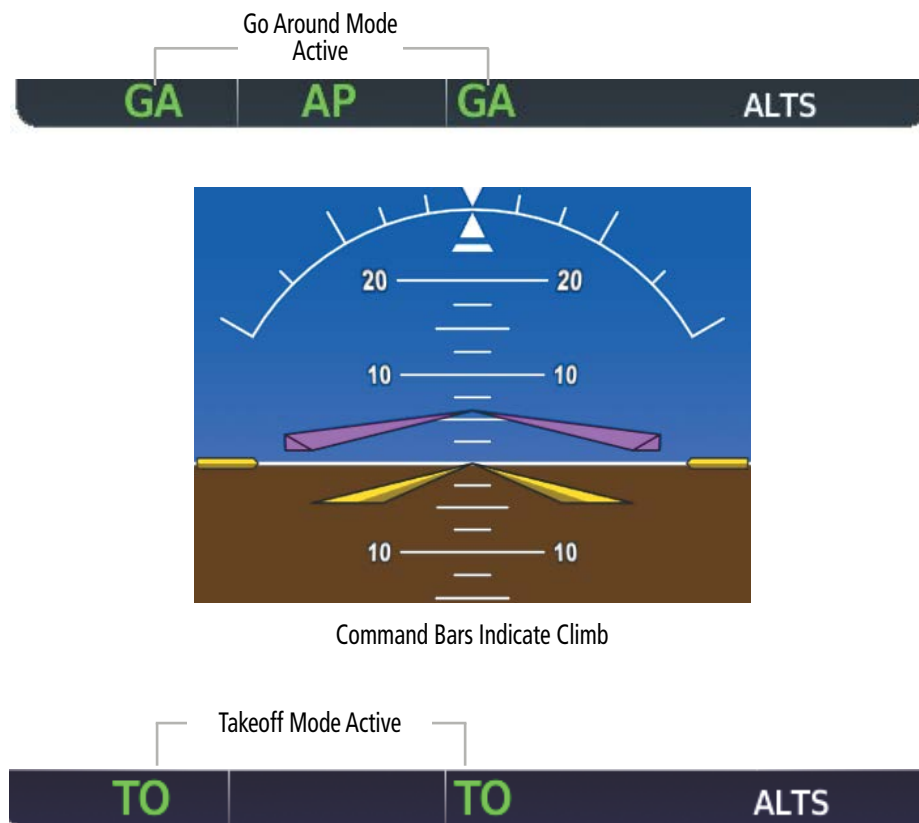


Figure 7-24 Takeoff and Go Around Modes

7.5 AUTOPILOT OPERATION



NOTE: Refer to the current pertinent flight manual for specific instructions regarding emergency procedures.

The autopilot operate flight control surface servos to provide automatic flight control. The autopilot controls the aircraft pitch and roll attitudes following commands received from the Flight Director. Pitch autotrim provides trim commands to the pitch trim servo to relieve any sustained effort required by the pitch servo.

FLIGHT CONTROL

Pitch and roll commands are provided to the servos, based on the active Flight Director modes. Servo motor control limits the maximum servo speed and torque. The servo mounts are equipped with slip-clutches set to certain values. This allows the servos to be overridden in case of an emergency.

PITCH AXIS AND PITCH TRIM

The autopilot pitch axis uses pitch rate to stabilize the aircraft pitch attitude during upsets and Flight Director maneuvers. Flight Director pitch commands are rate and attitude-limited, combined with pitch damper control, and sent to the pitch servo motor. The pitch servo measures the output effort (torque) and provides this signal to the pitch trim servo. The pitch trim servo commands the motor to reduce the average pitch servo effort.

When the autopilot is not engaged, the pitch trim servo may be used to provide manual electric trim. This allows the aircraft to be trimmed using a control stick switch rather than the trim wheel. Manual trim commands are generated only when both halves of the **MEPT** Switch are operated simultaneously. Trim speeds are scheduled with airspeed to provide more consistent response.

ROLL AXIS

The autopilot roll axis uses roll rate to stabilize aircraft roll attitude during upsets and Flight Director maneuvers. The Flight Director roll commands are rate- and attitude-limited, combined with roll damper control, and sent to the roll servo motor.

ENGAGEMENT



NOTE: Autopilot engagement/disengagement is not equivalent to servo engagement/disengagement. Use the **CWS** Button to disengage the pitch and roll servos while the autopilot remains active.

When the **AP** Key is pressed, the autopilot and flight director (if not already active) are activated and the annunciator lights on the AFCS controller for the autopilot is illuminated. The flight director engages in Pitch and Roll Hold Modes when initially activated.



Figure 7-25 Autopilot Engaged

Autopilot status is displayed in the center of the AFCS Status Box. Engagement is indicated by green 'AP' annunciation.

CONTROL WHEEL STEERING

During autopilot operation, the aircraft may be hand-flown without disengaging the autopilot. Pressing and holding the **CWS** Button disengages the pitch and roll servos from the flight control surfaces and allows the aircraft to be hand-flown. At the same time, the flight director is synchronized to the aircraft attitude during the maneuver.

The 'AP' annunciation is temporarily replaced by 'CWS' in white for the duration of CWS maneuvers.



Figure 7-26 CWS Annunciation

In most scenarios, releasing the **CWS** Button reengages the autopilot with a new reference. Refer to flight director mode descriptions for specific CWS behavior in each mode.

DISENGAGEMENT

The autopilot is manually disengaged by pushing the **AP DISC** Switch, **AP TRIM** ARM Switch, or the **AP** Key on the MFD. Manual disengagement is indicated by a five-second flashing yellow 'AP' annunciation and a two-second autopilot disconnect aural alert. After manual disengagement, the autopilot disconnect aural alert may be cancelled by pushing the **AP TRIM** ARM or **AP DISC** Switch (**AP DISC** Switch also cancels the flashing 'AP' annunciation).



Figure 7-27 Manual Autopilot Disengagement

Automatic autopilot disengagement is indicated by a flashing red and white 'AP' annunciation and by the autopilot disconnect aural alert, which continue until acknowledged by pushing the **AP DISC** or **AP TRIM** ARM Switch. Automatic autopilot disengagement occurs due to:

- System failure
- Invalid sensor data
- Stall warning
- Inability to compute default flight director modes (FD also disengages automatically)

7.6 AFCS ANNUNCIATIONS AND ALERTS

AFCS ALERTS

Alert Condition	Annunciation	Description
Aileron Mistrim Right	AIL→	Roll servo providing sustained force in the indicated direction
Aileron Mistrim Left	←AIL	
Elevator Mistrim Down	↓ELE	Pitch servo providing sustained force in the indicated direction. May indicate a failure of the pitch trim servo or trim system.
Elevator Mistrim Up	↑ELE	
Pitch Trim Failure (or Stuck AP TRIM Switch)	PTRM	If AP engaged, take control of the aircraft and disengage AP If AP disengaged, move AP TRIM switches separately to unstick
Roll Failure	ROLL	Roll axis control failure; AP inoperative
Pitch Failure	PTCH	Pitch axis control failure; AP inoperative
System Failure	AFCS	AP and MEPT are unavailable; FD may still be available
Preflight Test	PFT	Performing preflight system test; aural alert sounds at completion Do not press the AP DISC Switch during servo power-up and preflight system tests. Doing so may cause the preflight system test to fail or never to start. Cycle power to the servos if this occurs.
	PFT	Preflight system test failed; aural alert sounds at failure

Table 7-6 AFCS Alerts

OVERSPEED PROTECTION



NOTE: Overspeed protection is not active in ALT, GS or GP modes.

While Pitch Hold, Vertical Speed, Flight Level Change, Vertical Path Tracking, or an altitude capture mode is active, airspeed is monitored by the flight director. Overspeed protection is provided to limit the flight director's pitch command in situations where the flight director cannot acquire and maintain the mode reference for the selected vertical mode without exceeding Vne.

When Overspeed Protection is active, the Airspeed Reference appears in a box above the Airspeed Indicator, flashing a yellow 'MAXSPD' annunciation. Engine power should be reduced and/or the pitch reference adjusted to slow the aircraft. The annunciation disappears when the overspeed condition is resolved.

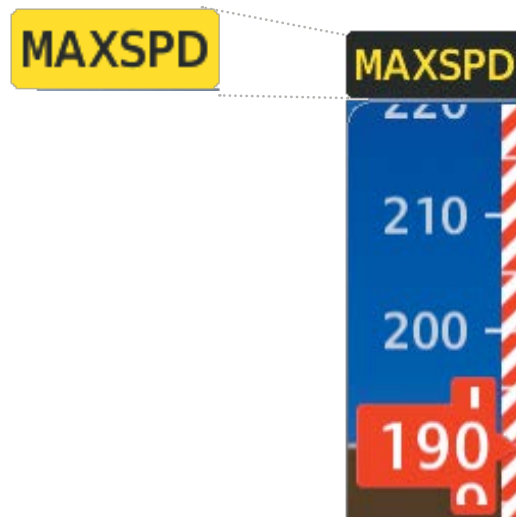


Figure 7-28 Overspeed Annunciation

7.7 ABNORMAL OPERATION

SUSPECTED AUTOPILOT MALFUNCTION



NOTE: Consult the aircraft documentation for the location of circuit breakers as well as specifics that may supplement or amplify this procedure.

Mitigating suspected autopilot failure or trim failure:

- 1) Firmly grasp the control wheel.
- 2) Press and hold the **AP DISC** Switch. The autopilot will disconnect and power is removed from the trim motor. Power is also removed from all primary servo motors and engaged solenoids. Note the visual and aural alerting indicating autopilot disconnect.
- 3) Retrim the aircraft as needed. Substantial trim adjustment may be needed.
- 4) Pull the appropriate circuit breaker(s) to electrically isolate the servo and solenoid components.
- 5) Release the **AP DISC** Switch.

OVERPOWERING AUTOPILOT SERVOS

In the context of this discussion, “overpowering” refers to any pressure or force applied to the pitch controls when the autopilot is engaged. A small amount of pressure or force on the pitch controls can cause the autopilot automatic trim to run to an out-of-trim condition. Therefore, any application of pressure or force to the controls should be avoided when the autopilot is engaged.

Overpowering the autopilot during flight will cause the autopilot’s automatic trim to run, resulting in an out-of-trim condition or cause the trim to hit the stop if the action is prolonged. In this case, larger than anticipated control forces are required after the autopilot is disengaged.

Checking autopilot servos during the preflight check:

- 1) Check for proper autopilot operation and ensure the autopilot can be overpowered.
- 2) Note the forces required to overpower the autopilot servo clutches.

SYSTEM
OVERVIEW

FLIGHT
INSTRUMENTS

EIS

AUDIO & CNS

FLIGHT
MANAGEMENT

HAZARD
AVOIDANCE

AFCS

ADDITIONAL
FEATURES

APPENDICES

INDEX

Blank Page

SECTION 8 ADDITIONAL FEATURES

8.1 OVERVIEW



NOTE: Regardless of the availability of SafeTaxi®, ChartView, or FliteCharts, it may be necessary to carry another source of charts on-board the aircraft.

Additional features of the Integrated Avionics System include the following:

- SafeTaxi® Diagrams
- Electronic Charts (Optional)
 - ChartView
 - FliteCharts®
 - IFR/VFR Charts
- AOPA™ or AC-U-KWIK Airport Directory
- SiriusXM® Satellite Radio (Optional)
- Flight Data Logging
- Satellite Telephone and SMS Text Messaging (Optional)
- Connex® (Optional)
- Autonomi™
 - Electronic Stability and Protection (Optional)
- Electronic Checklists
- Database Management

SafeTaxi diagrams provide detailed taxiway, runway, and ramp information at more than 1300 airports in the United States. By decreasing range on an airport that has a SafeTaxi diagram available, a close up view of the airport layout can be seen.

Optional electronic charts offer the convenience of rapid access to essential information. ChartView provides Jeppesen on-board electronic terminal procedures charts. FliteCharts provide AeroNav Services on-board electronic terminal procedures charts. And IFR/VFR Charts provide electronic low altitude IFR charts, high altitude IFR charts, and VFR charts for navigation.

The Airport Directory feature offers detailed information for a selected airport, such as available services, hours of operation, and lodging options.

The optional SiriusXM Satellite Radio entertainment audio feature of the GDL® 69A SXM Datalink Receiver handles more than 170 channels of music, news, and sports. SiriusXM Satellite Radio offers more entertainment choices and longer range coverage than commercial broadcast stations.

The Flight Data Logging feature automatically stores critical flight and engine data on an SD™ data card. Approximately 1,000 flight hours can be recorded for each 1GB of available space on the card.

Iridium Satellite Telephone Services and SMS Text Messaging is an optional subscription service offered through Garmin Connex® and Iridium Satellite LLC.

The optional Connex® feature allows for setting up the installed optional Flight Stream device for a Bluetooth connection between the system and a mobile device running the Garmin Pilot™ application.

Autonomi™ is a family of Autonomous Safety-Enhancing Technology solutions designed to help make flying safer. The Autonomi product that is optional for the Diamond DA40NG is Electronic Stability and Protection (ESP™), a feature intended to discourage aircraft operation outside the normal flight envelope.

Electronic checklists allow a pilot to quickly find the proper procedure for a particular phase of flight.

The database management feature provides a comprehensive means to view and manage all databases installed on the system.

8.2 SAFETAXI



WARNING: Always refer to current aeronautical charts and NOTAMs for verification of displayed aeronautical information. Displayed aeronautical data may not incorporate the latest NOTAM information.

SafeTaxi is an enhanced feature that gives greater map detail when viewing airports at close range. The maximum map ranges for enhanced detail are pilot configurable. When viewing at ranges close enough to show the airport detail, the map reveals taxiways with identifying letters/numbers, airport Hot Spots, and airport landmarks including ramps, buildings, control towers, and other prominent features. Resolution is greater at lower map ranges. When the MFD display is within the SafeTaxi ranges, the airplane symbol on the airport provides enhanced position awareness.

Designated Hot Spots are recognized at airports with many intersecting taxiways and runways, and/or complex ramp areas. Airport Hot Spots are outlined to caution pilots of areas on an airport surface where positional awareness confusion or runway incursions happen most often. Hot Spots are defined with a magenta circle or outline around the region of possible confusion.

During ground operations the aircraft's position is displayed in reference to taxiways, runways, and airport features. In the following example, the aircraft is on Taxiway Echo approaching an Airport Hot Spot on KNCI airport. When panning over the airport, features such as runway holding lines and taxiways are shown at the cursor.



Figure 8-1 SafeTaxi on the 'Map - Navigation Map' Page

The **Detail** Softkey (declutter) label advances to Detail All, Detail 3, Detail 2 and Detail 1 each time the softkey is selected for easy recognition of decluttering level. Pressing the **Detail All** Softkey removes the taxiway markings and airport feature labels. Pressing the **Detail 3** Softkey removes VOR station ID, the VOR symbol, and intersection names if within the airport plan view. Pressing the **Detail 2** Softkey removes the airport runway layout, unless the airport in view is part of an active route structure. Pressing the **Detail 1** Softkey cycles back to the original map detail. Refer to Map Declutter Levels in the Flight Management Section.

Any map page that displays the navigation view can also show the SafeTaxi airport layout within the maximum configured range. The following is a list of pages where the SafeTaxi feature can be seen:

- PFD Maps
- 'Map - Navigation Map' Page
- 'Map - Weather Datalink (CNXT)' Page
- 'All 'WPT' pages (except 'WPT - VRP Information' Page)
- 'Aux - Trip Planning' Page
- All 'NRST' pages
- 'FPL - Active Flight Plan' Page
- 'FPL - Flight Plan Catalog' Page

Configuring SafeTaxi range:

- 1) While viewing the 'Map-Navigation Map' Page, press the **MENU** Key to display the 'Page Menu.'
- 2) Turn the large **FMS** Knob to highlight the 'Map Settings' Menu Option and press the **ENT** Key.

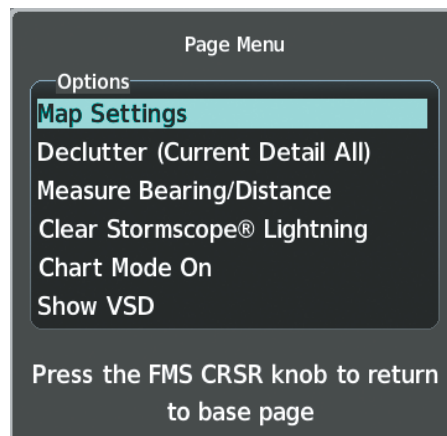


Figure 8-2 'Page Menu,' Map Settings Option

- 3) Turn the **FMS** Knob to select the 'Aviation' Group and press the **ENT** Key.
- 4) Turn the large **FMS** Knob to scroll through the 'Aviation' Group options to SafeTaxi.
- 5) Turn the small **FMS** Knob to display the range of distances.
- 6) Turn either **FMS** Knob to select the desired distance for maximum SafeTaxi display range.
- 7) Press the **ENT** Key to complete the selection.
- 8) Push the **FMS** Knob to return to the 'Map-Navigation Map' Page.

SYSTEM OVERVIEW
FLIGHT INSTRUMENTS
EIS
AUDIO & CNS
FLIGHT MANAGEMENT
HAZARD AVOIDANCE
AFCS
ADDITIONAL FEATURES
APPENDICES
INDEX

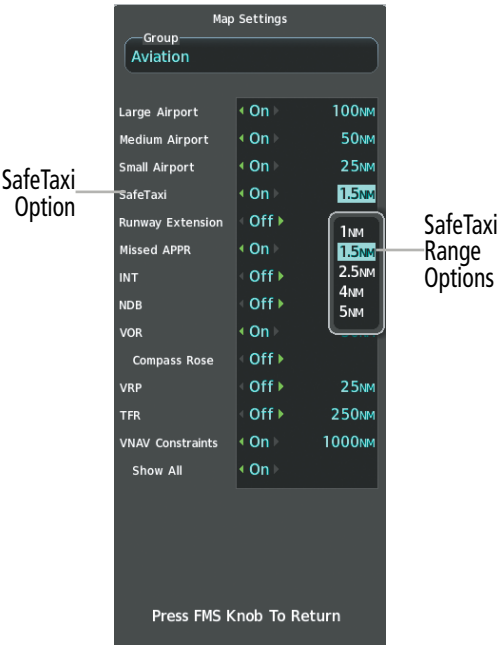


Figure 8-3 SafeTaxi 'Map Settings'

8.3 ELECTRONIC CHARTS (OPTIONAL)



WARNING: Always refer to current aeronautical charts and NOTAMs for verification of displayed aeronautical information. Displayed aeronautical data may not incorporate the latest NOTAM information.



WARNING: Do not rely on the displayed minimum safe altitude (MSAs) as the sole source of obstacle and terrain avoidance information. Always refer to current aeronautical charts for appropriate minimum clearance altitudes.



NOTE: Electronic aeronautical charts displayed on this system have been shown to meet the guidance in AC 120-76D as a Type B Electronic Flight Bag (EFB) for FliteCharts and ChartView. The accuracy of the charts is subject to the chart data provider. Own-ship position on airport surface charts cannot be guaranteed to meet the accuracy specified in AC 120-76D. Possible additional requirements may make a secondary source of aeronautical charts, such as traditional paper charts or an additional electronic display, necessary on the aircraft and available to the pilot. If the secondary source of aeronautical charts is a Portable Electronic Device (PED), its use must be consistent with the guidance in AC 120-76D.



NOTE: The pilot/operator must have access to database alerts and consider their impact on the intended aircraft operation. The database alerts can be viewed at flygarmin.com by selecting 'Aviation Database Alerts.'



NOTE: Do not rely solely upon datalink services to provide Temporary Flight Restriction (TFR) information. Always confirm TFR information through official sources such as Flight Service Stations or Air Traffic Control.

Electronic charts that resemble the paper versions of AeroNav Services terminal procedures charts (FliteCharts) and Jeppesen terminal procedures charts (ChartView) can be displayed on the MFD. When the databases for both chart types are purchased and loaded in the system, the desired charts brand, or source, can be selected for viewing. The active chart source for a particular chart is shown in the upper right of the chart pane after 'Source'.

Selecting preferred charts source:

- 1) While viewing a chart press the **MENU** Softkey to display the 'Page Menu' Options.
- 2) Turn the large **FMS** Knob to highlight 'Chart Setup' and press the **ENT** Key.
- 3) Turn the large **FMS** Knob to move to the 'Preferred Charts Source' option.
- 4) Turn the small **FMS** Knob to choose between the available options (ChartView or FliteCharts) and press the **ENT** Key.


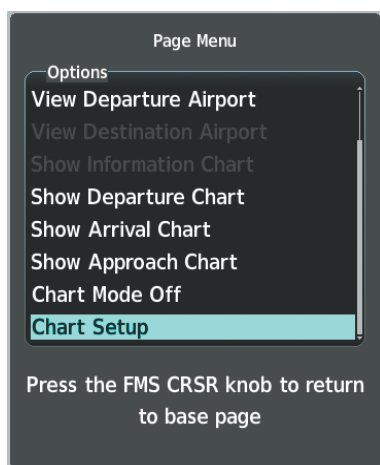


Chart Setup Option

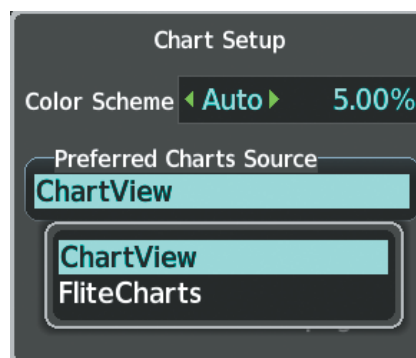

Preferred Charts Source Option

Figure 8-4 Preferred Charts Source

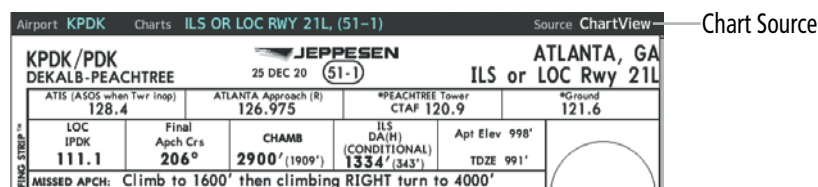


Figure 8-5 Chart Source

CHARTVIEW

ChartView charts resemble the paper version of Jeppesen terminal procedures charts. The charts are displayed in full color with high-resolution.

The geo-referenced aircraft position is indicated by an aircraft symbol displayed on the chart when the aircraft's current position is within the boundaries of the chart. Inset boxes are not considered within the chart boundaries. Therefore, when the aircraft symbol reaches a chart boundary line, or inset box, the aircraft symbol is removed from the display.

The following figure shows examples of an inset box and off-scale areas. Note, the grey shading of the off-scale areas is for illustrative purposes only and will not appear on the published chart. These off-scale areas appear on the chart to convey supplemental information. However, the depicted geographical position of this information, as it relates to the chart planview, is not the actual geographic position. Therefore, when the aircraft symbol appears within one of these areas, the aircraft position indicated is relative to the chart planview, not to the off-scale area.



NOTE: Do not maneuver the aircraft based solely upon the geo-referenced aircraft symbol.

The ChartView database subscription is available from Jeppesen, Inc. Available data includes:

- Arrivals (STAR)
- Departure Procedures (DP)
- Approaches
- Airport Diagrams
- NOTAMs

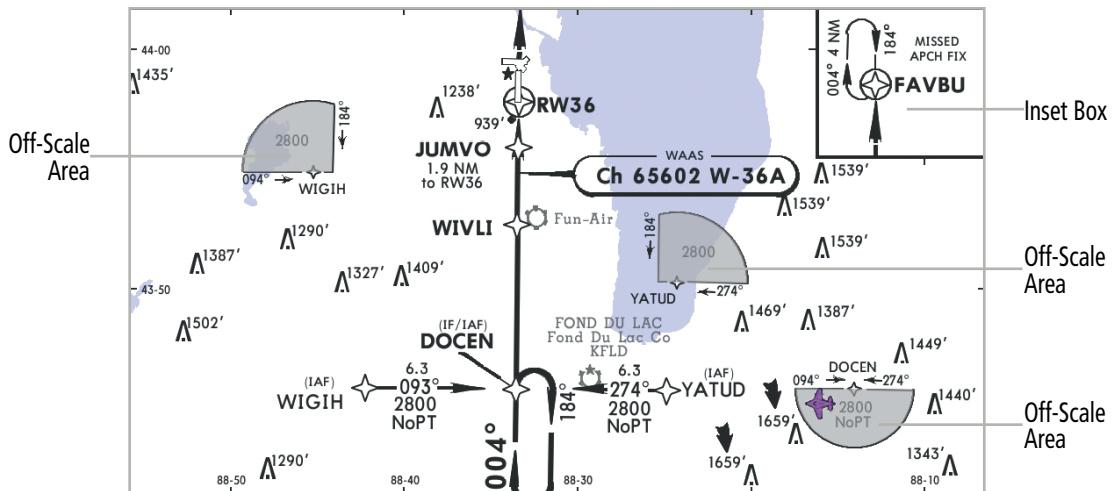


Figure 8-6 Sample Chart Indicating Off-Scale Areas

CHARTVIEW SOFTKEYS



NOTE: A subdued softkey label indicates the function is disabled.

ChartView functions are displayed on different levels of softkeys. While on the 'Map - Navigation Map' Page, 'WPT - Airport Information' Page, 'FPL - Active Flight Plan' Page, or 'NRST - Nearest Airport' Page, pressing the **Charts** Softkey displays the available terminal chart and advances to the chart selection level of softkeys. The softkeys available depend on the page selected.

- » Pressing the **CHRT Opt** Softkey displays the next level of softkeys: the chart options level (see below).
- » Pressing the **Show Map** Softkey returns you to the previous screen.
- » Pressing the **Info** Softkey displays the Airport Diagram.
- » Pressing the **DP** Softkey displays the Departure Procedure Chart if available.
- » Pressing the **STAR** Softkey displays the Standard Terminal Arrival Chart if available.
- » Pressing the **APR** Softkey displays the approach chart for the airport if available.
- » Pressing the **WX** Softkey shows the airport weather frequency information, and includes weather data such as METAR and TAF from the SiriusXM Datalink Receiver, when available. Weather information is available only when a SiriusXM Datalink Receiver is installed and the SiriusXM Weather subscription is current.
- » Recent NOTAMs applicable to the current ChartView cycle are included in the ChartView database. Pressing the **NOTAM** Softkey shows the local NOTAM information for selected airports, when available. When NOTAMs are not available, the **NOTAM** Softkey label appears subdued and is disabled. The **NOTAM** Softkey may appear on the 'WPT - Airport Information' Page and all of the chart page selections. Pressing the **NOTAM** Softkey again removes the NOTAMs information.



NOTE: Only NOTAMs applicable to specific information conveyed on the displayed Jeppesen chart are available when the **NOTAM** Softkey is pressed. There may be other NOTAMs available pertaining to the flight that may not be displayed. Contact Jeppesen for more information regarding Jeppesen database published NOTAMs.

- » Pressing the **Go Back** Softkey reverts to the top level softkeys and previous page.
- » For further information on the **Checklist** Softkey, see the Electronic Checklist Section.

CHART OPTIONS

While viewing the CHRT Opt Softkeys, after 45 seconds of softkey inactivity, the system reverts to the chart selection softkeys. The following describes the sublevel softkeys:

- Pressing the **ROT CCW** Softkey rotates the displayed chart counter clockwise in 90 degree increments.
- Pressing the **ROT CW** Softkey rotates the displayed chart clockwise in 90 degree increments.
- Pressing the **All** Softkey shows the complete approach chart on the screen.
- Pressing the **Header** Softkey shows the header view (approach chart briefing strip) on the screen.
- Pressing the **Plan** Softkey shows the approach chart two dimensional plan view.
- Pressing the **Profile** Softkey displays the approach chart descent profile strip.
- Pressing the **Minimums** Softkey displays the minimum descent altitude/visibility strip at the bottom of the approach chart.
- If the chart scale has been adjusted to view a small area of the chart, pressing the **Fit WDT** Softkey changes the chart size to fit the available screen width.
 - ➔ Pressing the **Full SCN** Softkey alternates between removing and replacing the data window to the right.
- Pressing the **Back** Softkey returns you to the previously selected level.

TERMINAL PROCEDURES CHARTS

Viewing terminal procedures charts:

While viewing the 'Map - Navigation Map' Page, 'WPT - Airport Information' Page, 'FPL - Active Flight Plan' Page, or 'NRST - Nearest Airports' Page, press the **Charts** Softkey.

Or:

- 1) While viewing the 'Map - Navigation Map' Page, 'WPT - Airport Information' Page, 'FPL - Active Flight Plan' Page, or 'NRST - Nearest Airports' Page, press the **MENU** Key to display the Page Menu.
- 2) Turn the large **FMS** Knob to scroll through the 'Options' Menu to 'Chart Mode On' or 'Charts', as appropriate, and press the **ENT** Key.

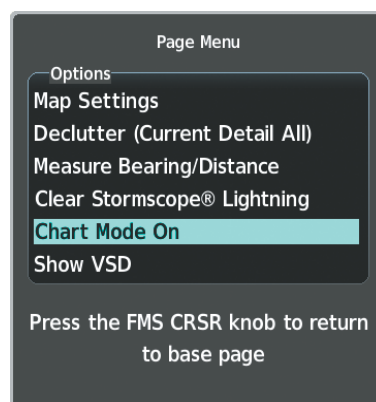


Figure 8-7 Select 'Chart Mode On' from 'Map - Navigation Map' Page Menu

When no terminal procedure chart is available, the banner 'No Available Charts' appears on the screen. The banner does not refer to the ChartView subscription, but rather the availability of a particular airport chart selection or procedure for a selected airport.

No Available Charts

Figure 8-8 'No Available Charts' Banner

If there is a problem in rendering the data (e.g., a data error or a failure of an individual chart), the banner 'Unable to Display Chart' is then displayed.

Unable To Display Chart

Figure 8-9 'Unable To Display Chart' Banner

When a chart is not available by pressing the **Charts** Softkey or selecting a 'Page Menu' Option, charts may be obtained for other airports from the 'WPT' Pages or 'Flight Plan' Pages.

If a chart is available for the destination airport, or the airport selected in the active flight plan, the chart appears on the screen. When no flight plan is active, or when not flying to a direct-to destination, pressing the **Charts** Softkey displays the chart for the nearest airport, if available.

The airport runway diagram is usually displayed on the 'WPT - Airport Chart' page after the **Info** Softkey is pressed. Where no runway diagram exists, but Take Off Minimums or Alternate Minimums are available, that page appears. If 'WPT - Airport Information' Pages are unavailable, the Approach Chart for the airport is shown.

Selecting an approach chart:

- 1) While viewing the 'Map - Navigation Map' Page, 'WPT - Airport Information' Page, 'FPL - Active Flight Plan' Page, or 'NRST - Nearest Airports' Page, press the **Charts** Softkey.
- 2) Press the **APR** Softkey if not already selected.
- 3) Push the **FMS** Knob to activate the cursor.
- 4) Turn the large **FMS** Knob to select either the 'Airport' Identifier Box or the 'Charts' Box.
- 5) Turn the small and large **FMS** Knob to enter the desired airport identifier and press the **ENT** Key to complete the airport selection.
- 6) Turn the small **FMS** Knob to show the approach chart selection choices.
- 7) Scroll through the available charts and press the **ENT** Key to complete the chart selection.

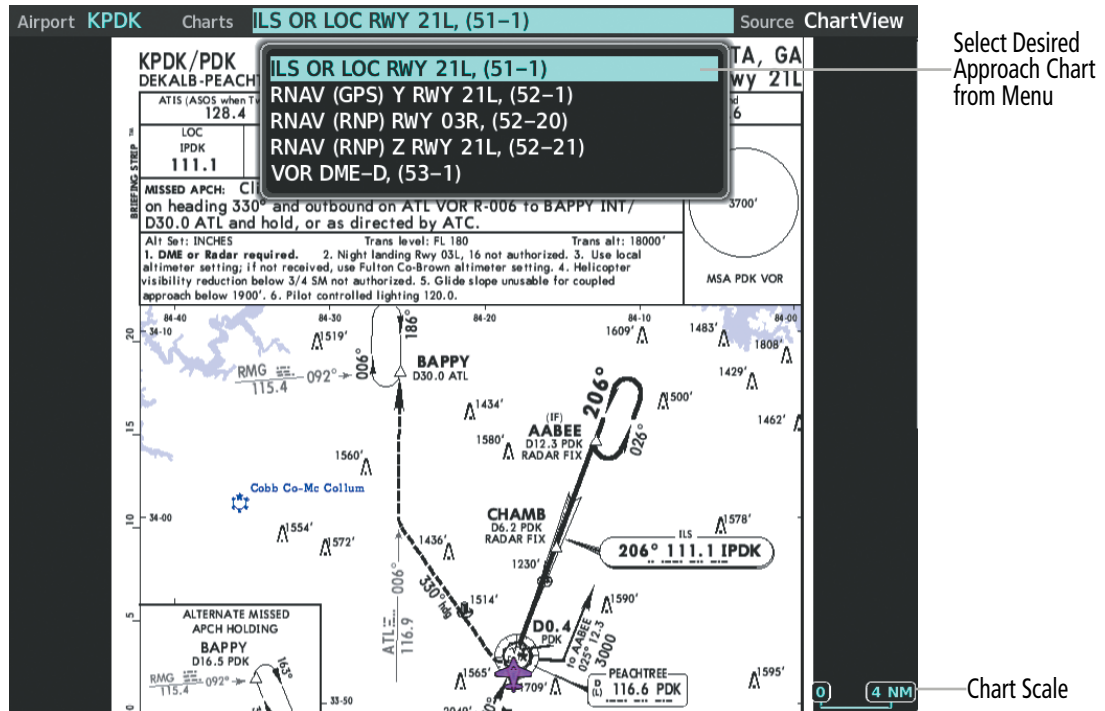


Figure 8-10 Approach Chart Selection

While the 'Charts' Box is selected using the **FMS** Knob, the system softkeys are blank. Once the desired chart is selected, the chart scale can be changed and the chart page can be scrolled using the **Joystick**. Pressing the **Joystick** centers the chart on the screen.

Pressing the **Charts** Softkey switches between the ChartView diagram and the previously selected page.

Selecting full screen on or off:

- 1) While viewing a terminal chart press the **MENU** Key to display the 'Page Menu' Options.

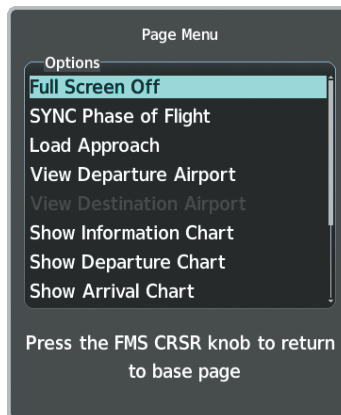


Figure 8-11 Full Screen On/Off Selection

- 2) Turn the large **FMS** Knob to highlight the 'Full Screen On' or 'Full Screen Off' option and press the **ENT** Key.

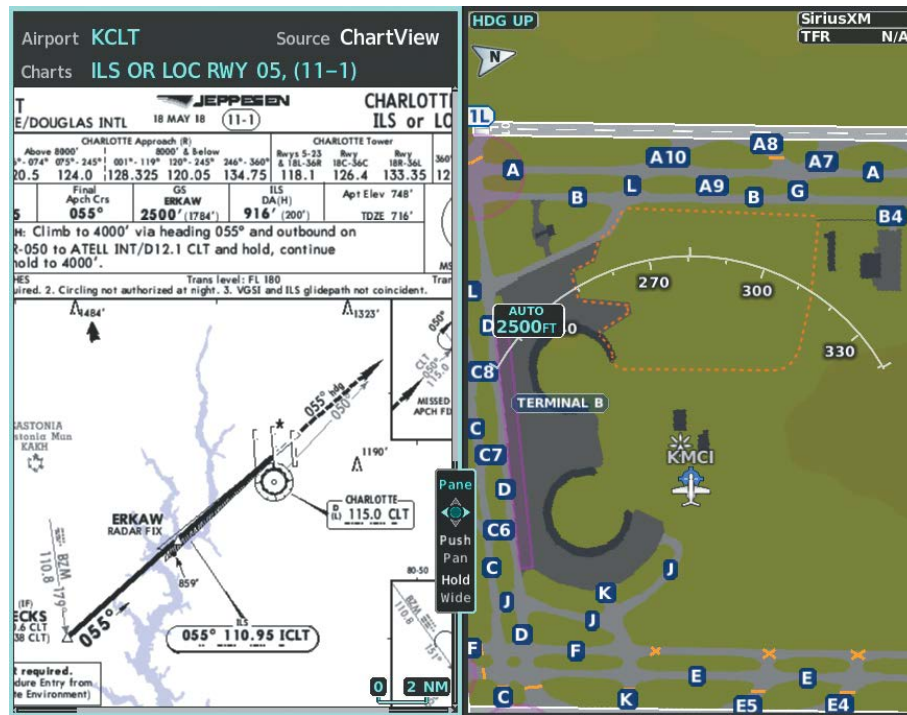


Figure 8-12 Split Screen View

The full screen view can be turned back on by following the previous steps and selecting 'Full Screen On' Option.

Selecting additional information:

- 1) From the 'WPT - Airport Information' Page, press the **Chart** Softkey to view the 'WPT - Airport Chart' Page.
- 2) Push the **FMS** Knob to activate the cursor.
- 3) Turn the large **FMS** Knob to scroll through the 'Airport', 'Info', 'Runways', or 'Frequencies' boxes as desired.
- 4) To change the airport for which additional information is sought, in the 'Airport' Box use the small and large **FMS** knobs to change either the airport identifier, name, or location. Press the **ENT** Key to complete the selection.
- 5) If multiple airport charts are available (e.g., CLASS B AIRSPACE, LOW VIS TAXI ROUTES, etc.) in the 'Info' Box use the small **FMS** Knob to access and scroll through the list. Press the **ENT** Key to complete the selection.
- 6) To change the runway for which additional information is sought, in the 'Runways' Box use the small **FMS** Knob to scroll through the runways.
- 7) In the 'Frequencies' Box use either **FMS** Knob to scroll through and highlight selections. Press the **ENT** Key to get additional information for any highlighted frequency source shown in cyan (e.g., GROUND or TOWER). Press the **ENT** Key to load or transfer any highlighted COM or NAV frequency.
- 8) Push the **FMS** Knob again to deactivate the cursor.
- 9) Press the **Info 1** Softkey to display Airport Directory information if desired. Press the **Info 2** Softkey to return.

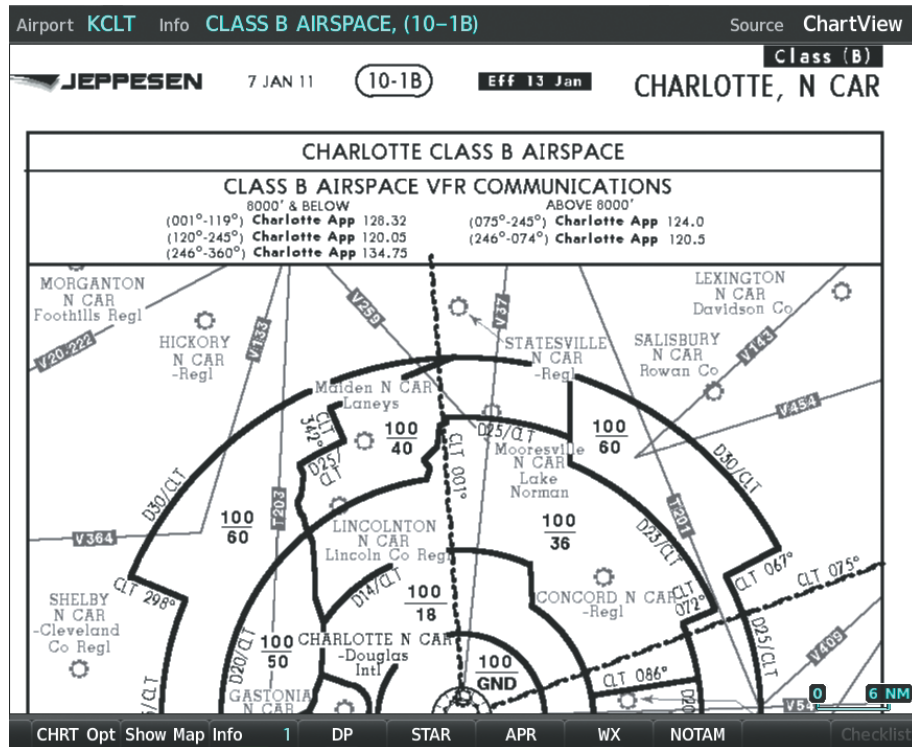


Figure 8-13 Class B Airspace Chart Selected from 'Info' Box

DAY/NIGHT VIEW

ChartView can be displayed on a white or black background for day or night viewing. The day view offers a better presentation in a bright environment. The night view gives a better presentation for viewing in a dark environment. When the Chart Setup Box is selected the MFD softkeys are blank.

Selecting day, night, or automatic view:

- 1) While viewing a terminal chart press the **MENU** Key to display the 'Page Menu' Options.
- 2) Turn the large **FMS** Knob to highlight the 'Charts Setup' menu option and press the **ENT** Key.

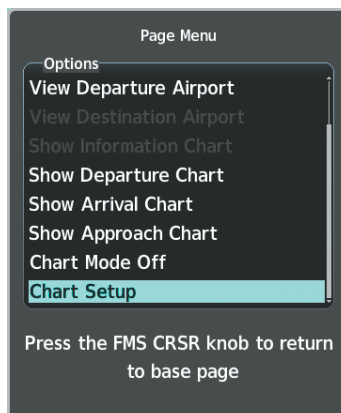


Figure 8-14 Page Menu Chart Setup

- 3) Turn the large **FMS** Knob to move to the 'Color Scheme' Option.
- 4) Turn the small **FMS** Knob to choose between 'Day,' 'Auto,' and 'Night' Options.
- 5) If Auto Mode is selected, turn the large **FMS** Knob to select the percentage field. Use the small **FMS** Knob to change the percentage value. The percentage value is the day/night crossover point based on the percentage of backlighting intensity. For example, if the value is set to 15%, the day/night display changes when the display backlight reaches 15% of full brightness.

The display must be changed in order for the new setting to become active. This may be accomplished by selecting another page or changing the display range.

- 6) Push the **FMS** Knob when finished to remove the 'Chart Setup' Menu.

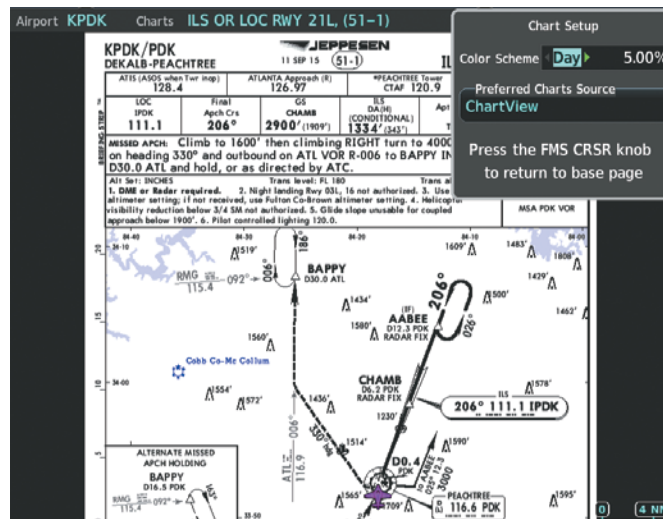


Figure 8-15 Approach Chart, Day View

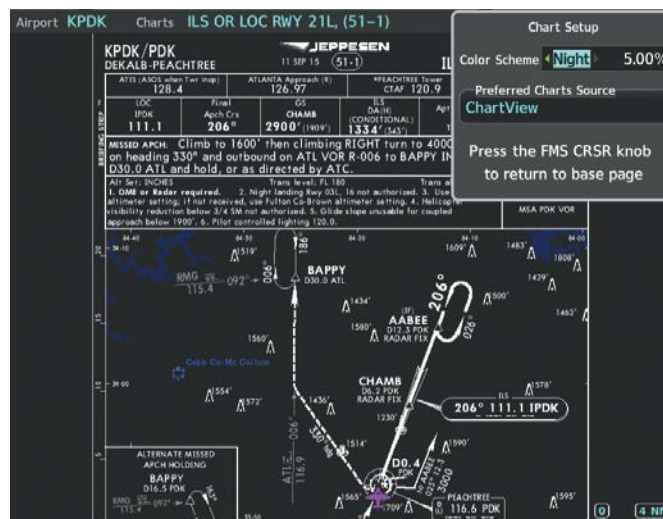


Figure 8-16 Approach Chart, Night View

FLITECHARTS

FliteCharts resemble the paper version of AeroNav Services terminal procedures charts. The charts are displayed with high-resolution and in color for applicable charts.

The geo-referenced aircraft position is indicated by an aircraft symbol displayed on the chart when the aircraft's current position is within the boundaries of the chart. Inset boxes are not considered within the chart boundaries. Therefore, when the aircraft symbol reaches a chart boundary line, or inset box, the aircraft symbol is removed from the display.

If the chart is not to scale the aircraft symbol will not be displayed and instead of the Chart Scale Box there will be a 'NOT TO SCALE' banner and an 'Aircraft Not Shown' Icon.

Not all charts are geo-referenced. These charts will display an 'Aircraft Not Shown' icon.



Figure 8-17 'Not to Scale' Banner and 'Aircraft Now Shown' Icon

The following figure shows examples of an inset box and off-scale areas. Note, the grey shading of the off-scale areas is for illustrative purposes only and will not appear on the published chart. These off-scale areas appear on the chart to convey supplemental information. However, the depicted geographical position of this information, as it relates to the chart planview, is not the actual geographic position. Therefore, when the aircraft symbol appears within one of these areas, the aircraft position indicated is relative to the chart planview, not to the off-scale area.

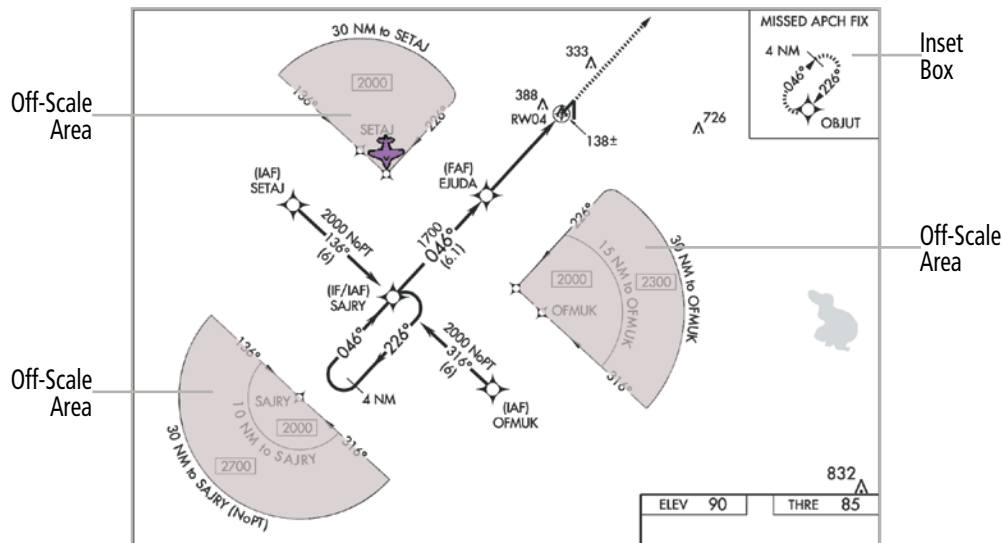


Figure 8-18 Sample Chart Indicating Off-Scale Areas



NOTE: Do not maneuver the aircraft based solely upon the geo-referenced aircraft symbol.

The FliteCharts database subscription is available from Garmin. Available data includes the following:

- Arrivals (STAR)
- Departure Procedures (DP)
- Approaches (APR)
- Airport Diagrams (Info)
- NOTAMs

FLITECHARTS SOFTKEYS

FliteCharts functions are displayed on three levels of softkeys. While on the 'Map - Navigation Map' Page, 'WPT - Airport Information' Page, 'FPL - Active Flight Plan' Page, or 'NRST - Nearest Airport' Page, pressing the **Charts** Softkey displays the available terminal chart and advances to the chart selection level of softkeys.

- » Pressing the **CHRT Opt** Softkey displays the next level of softkeys: the chart options level (see below).
- » Pressing the **Show Map** Softkey returns you to the previous screen.
- » Pressing the **Info** Softkey displays the Airport Diagram.
- » Pressing the **DP** Softkey displays the Departure Procedure Chart if available.
- » Pressing the **STAR** Softkey displays the Standard Terminal Arrival Chart if available.
- » Pressing the **APR** Softkey displays the approach chart for the airport if available.
- » Pressing the **WX** Softkey shows the airport weather frequency information, and includes weather data such as METAR and TAF from the SiriusXM Datalink Receiver, when available. Weather information is available only when a SiriusXM Datalink Receiver is installed and the SiriusXM Weather subscription is current.
- » Pressing the **Go Back** Softkey reverts to the top level softkeys and previous page.
- » For further information on the **Checklist** Softkey, see the Electronic Checklist Section.

NOTAMs are not available with FliteCharts. The NOTAM Softkey label appears subdued and is disabled.

CHART OPTIONS

While viewing the **CHRT Opt** softkeys, after 45 seconds of softkey inactivity, the system reverts to the chart selection softkeys. The following describes the sublevel softkeys:

- Pressing the **ROT CCW** Softkey rotates the chart counterclockwise.
- Pressing the **ROT CW** Softkey rotates the chart clockwise.
- Pressing the **Fit WDTN** Softkey fits the width of the chart in the display viewing area.
- Pressing the **Full SCN** Softkey alternates between removing and replacing the data window to the right.
- Pressing the **Back** Softkey reverts to the top level softkeys and previous page.

TERMINAL PROCEDURES CHARTS

Viewing terminal procedures charts:

While viewing the 'Map - Navigation Map' Page, 'WPT - Airport Information' Page, 'FPL - Active Flight Plan' Page, or 'NRST - Nearest Airports' Page, press the **Charts** Softkey.

Or:

- 1) While viewing the 'Map - Navigation Map' Page, 'WPT - Airport Information' Page, 'FPL - Active Flight Plan' Page, or 'NRST - Nearest Airports' Page, press the **MENU** Key to display the Page Menu.
- 2) Turn the large **FMS** Knob to scroll through the 'Options' Menu to 'Chart Mode On' or 'Charts', as appropriate, and press the **ENT** Key.

When no terminal procedure chart is available, the banner 'No Available Charts' appears on the screen. The 'No Available Charts' Banner does not refer to the FliteCharts subscription, but rather the availability of a particular airport chart selection or procedure for a selected airport.

No Available Charts

Figure 8-19 'No Available Charts' Banner

If there is a problem in rendering the data (i.e., a data error or a failure of an individual chart), the banner 'Unable to Display Chart' is then displayed.

Unable To Display Chart

Figure 8-20 'Unable To Display Chart' Banner

When a chart is not available by pressing the **Charts** Softkey or selecting a 'Page Menu' Option, charts may be obtained for other airports from the 'WPT' pages or 'Flight Plan' pages.

If a chart is available for the destination airport or the airport selected in the active flight plan, the chart appears on the screen. When no flight plan is active, or when not flying to a direct-to destination, pressing the **Charts** Softkey displays the chart for the nearest airport, if available.

The airport runway diagram is usually displayed on the 'WPT - Airport Information' Page after the **Info** Softkey is pressed. Where no runway diagram exists, but 'Take Off Minimums' or 'Alternate Minimums' are available, that page appears. If 'WPT - Airport Information' pages are unavailable, the approach chart for the airport is shown.

Selecting an approach chart:

- 1) While viewing the 'Map - Navigation Map' Page, 'WPT - Airport Information' Page, 'FPL - Active Flight Plan' Page, or 'NRST - Nearest Airports' Page, press the **Charts** Softkey.
- 2) Press the **APR** Softkey if not already selected.
- 3) Push the **FMS** Knob to activate the cursor.
- 4) Turn the large **FMS** Knob to select either the 'Airport' Identifier Box or the 'Charts' Box.
- 5) Turn the small and large **FMS** Knob to enter the desired airport identifier and press the **ENT** Key to complete the airport selection.
- 6) Turn the small **FMS** Knob to show the approach chart selection choices.
- 7) Scroll through the available charts and press the **ENT** Key to complete the chart selection.

While the 'Charts' Box is selected using the **FMS** Knob, the system softkeys are blank. Once the desired chart is selected, the chart scale can be changed and the chart can be panned using the **Joystick**. Pressing the **Joystick** centers the chart on the screen.

The aircraft symbol is shown on the chart only if the chart is to scale and the aircraft position is within the boundaries of the chart. The aircraft symbol is not displayed when the 'Aircraft Not Shown' Icon appears. If the Chart Scale Box displays a banner 'NOT TO SCALE,' the aircraft symbol is not shown. The 'Aircraft Not Shown' Icon may appear at certain times, even if the chart is displayed to scale.

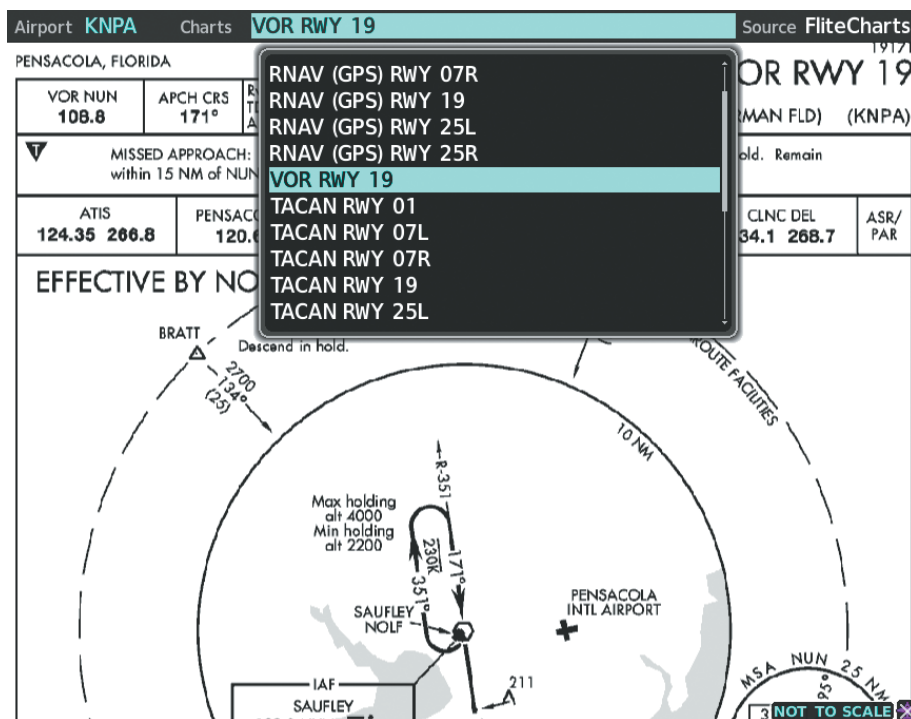


Figure 8-21 FliteChart, Chart Selection

Pressing the **Charts** Softkey switches between the FliteCharts diagram and the previously selected page.

Pressing the **Info** Softkey returns to the airport diagram when the view is on a different chart. If the displayed chart is the airport diagram, the **Info** Softkey has no effect.

Selecting full screen on or off:

- 1) While viewing a terminal chart press the **MENU** Key to display the 'Page Menu' Options.

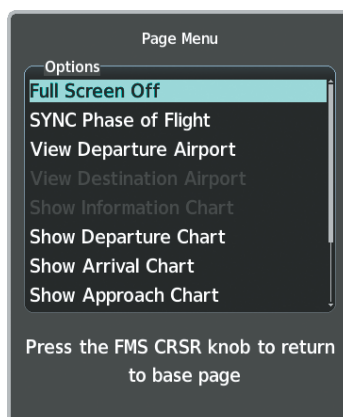


Figure 8-22 Full Screen On or Off

- 2) Turn the large **FMS** Knob to highlight the 'Full Screen Off' Option and press the **ENT** Key.

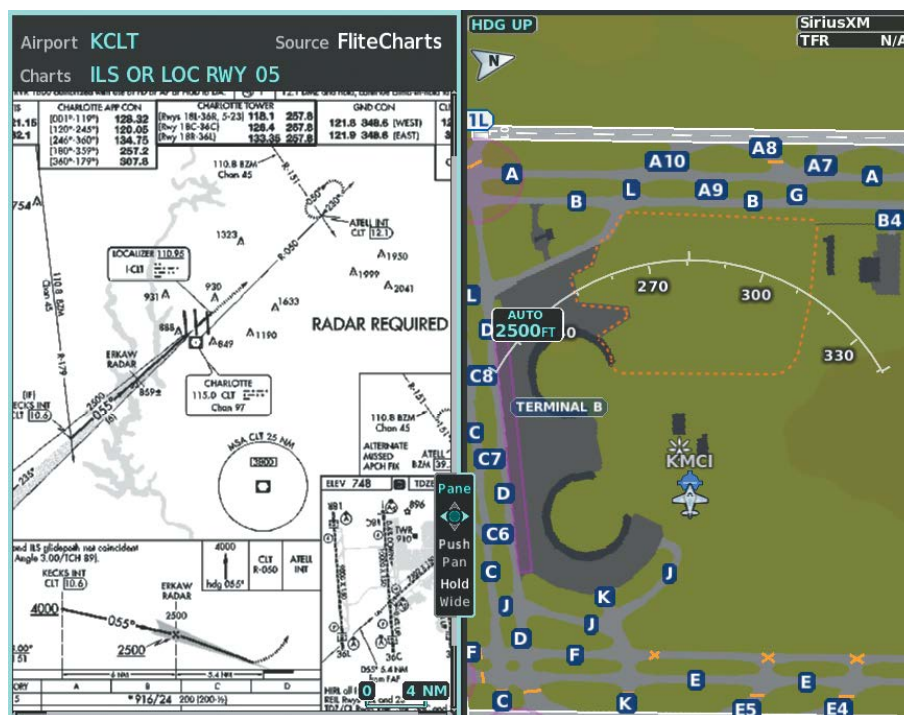


Figure 8-23 Split Screen View

The full screen view can be turned back on by following the previous steps and selecting 'Full Screen On' Option.

Selecting additional information:

- 1) From the 'WPT - Airport Information' Page, press the **Chart** Softkey to view the 'WPT - Airport Chart' Page.
- 2) Push the **FMS** Knob to activate the cursor.
- 3) Turn the large **FMS** Knob to scroll through the 'Airport', 'Info', 'Runways', or 'Frequencies' boxes as desired.
- 4) To change the airport for which additional information is sought, in the 'Airport' Box use the small and large **FMS** knobs to change either the airport identifier, name, or location. Press the **ENT** Key to complete the selection.
- 5) If multiple airport charts are available (e.g., ALTERNATE MINIMUMS, TAKEOFF MINIMUMS, etc.) in the 'Info' Box use the small **FMS** Knob to access and scroll through the list. Press the **ENT** Key to complete the selection.
- 6) To change the runway for which additional information is sought, in the 'Runways' Box use the small **FMS** Knob to scroll through the runways.
- 7) In the 'Frequencies' Box use either **FMS** Knob to scroll through and highlight selections. Press the **ENT** Key to get additional information for any highlighted frequency source shown in cyan (e.g., GROUND or TOWER). Press the **ENT** Key to load or transfer any highlighted COM or NAV frequency.
- 8) Push the **FMS** Knob again to deactivate the cursor.
- 9) Press the **Info 1** Softkey to display Airport Directory information if desired. Press the **Info 2** Softkey to return.

DAY/NIGHT VIEW

FliteCharts can be displayed on a white or black background for day or night viewing. The Day View offers a better presentation in a bright environment. The Night View gives a better presentation for viewing in a dark environment. When the 'Chart Setup' Box is selected the MFD softkeys are blank.

Selecting day, night, or automatic view:

- 1) While viewing a terminal chart press the **MENU** Key to display the 'Page Menu' Options.
- 2) Turn the large **FMS** Knob to highlight the 'Charts Setup' Menu Option and press the **ENT** Key.

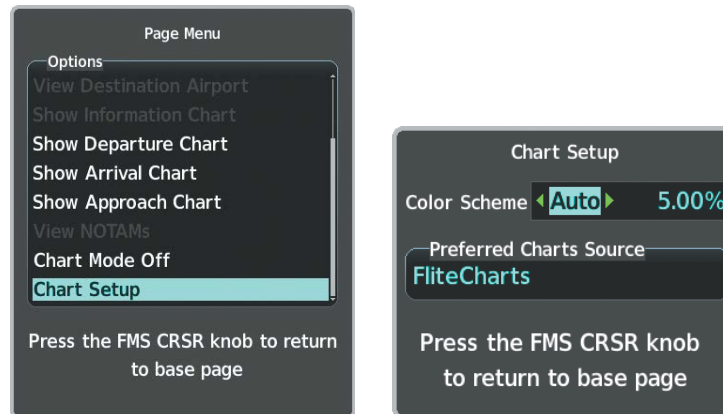


Chart Setup Option

Color Scheme Options

Figure 8-24 'Page Menu,' Chart Setup

- 3) The 'Color Scheme' Field is selected by default. If not already selected, turn the large **FMS** Knob to move to the 'Color Scheme' Field.
- 4) Turn the small **FMS** Knob to choose between 'Day,' 'Auto,' and 'Night' Options.
- 5) If Auto Mode is selected, turn the large **FMS** Knob to select the percentage field. Use the small **FMS** Knob to change the percentage value. The percentage value is the day/night crossover point based on the percentage of backlighting intensity. For example, if the value is set to 15%, the day/night display changes when the display backlight reaches 15% of full brightness.

The display must be changed in order for the new setting to become active. This may be accomplished by selecting another page or changing the display range.

- 6) Push the **FMS** Knob when finished to remove the 'Charts Setup' Menu.

IFR/VFR CHARTS

The system can display GPS navigation information on a VFR chart, a low altitude IFR chart, or a high altitude IFR chart, if installed. The information overlaid on the IFR/VFR Charts is selected and setup on the Navigation Map, but the IFR/VFR charts will not display some of the selected items. Only the following items will be overlaid on the chart:

- Map Pointer (distance and bearing to pointer, location of pointer, name, and other pertinent information)
- Map Range (17 range choices from 1 nm to 150 nm)
- Map Orientation (always North Up for IFR/VFR Charts)
- Aircraft Icon (representing present position)
- Wind Direction and Speed
- Icons for enabled map features (Traffic only)
- Flight Plan Legs
- Track Vector
- Runway Extension
- Missed Approach Preview
- Intersections (only as part of active flight plan)
- Visual Reporting Points
- VNAV Constraints
- Selected Altitude Intercept Arc

Map panning on the IFR/VFR Charts works the same as on the Navigation Map. Map range selected on either the Navigation Map or the IFR/VFR Charts applies to both. However, if the range selected on the Navigation Map it is not a valid chart range, the chart is shown with a range of 2.5 nm.

When different VFR charts exist for the same area the chart type will automatically display according to the range chosen. For example, in an area where both a Sectional and a Terminal Area Chart (TAC) are available, a range of 5 nm or more will show the Sectional chart. Once the range is decreased below 5 nm, the system will automatically change the displayed chart from the Sectional to the TAC.

Due to the potential error involved with the electronic depiction of maps, charts will display a 'gray circle of uncertainty' centered upon the aircraft icon. The aircraft's actual position can be anywhere within the range of the gray circle. The range of the circle will change based on the chart displayed and current zoom range.

The geo-referenced aircraft position is indicated by an aircraft symbol displayed on the chart when the current position is within the boundaries of the chart. Not all charts are geo-referenced. IFR/VFR charts may be viewed by selecting the 'Map - IFR/VFR Charts' Page.

Selecting IFR Low, IFR High, or VFR Charts:

- 1) Select the 'Map - IFR/VFR Charts' Page.
 - 2) Press the **VFR**, **IFR Low**, or **IFR High** Softkey to display the desired chart.
- Or:**
- 1) Press the **MENU** Key to display the 'Page Menu.'
 - 2) Select 'Display VFR', 'Display IFR Low' or 'Display IFR High' to display the desired chart.
 - 3) Press the **ENT** Key.



Figure 8-27 GPS Navigation Information on the VFR Chart



Figure 8-28 GPS Navigation Information on the IFR Low Altitude Chart

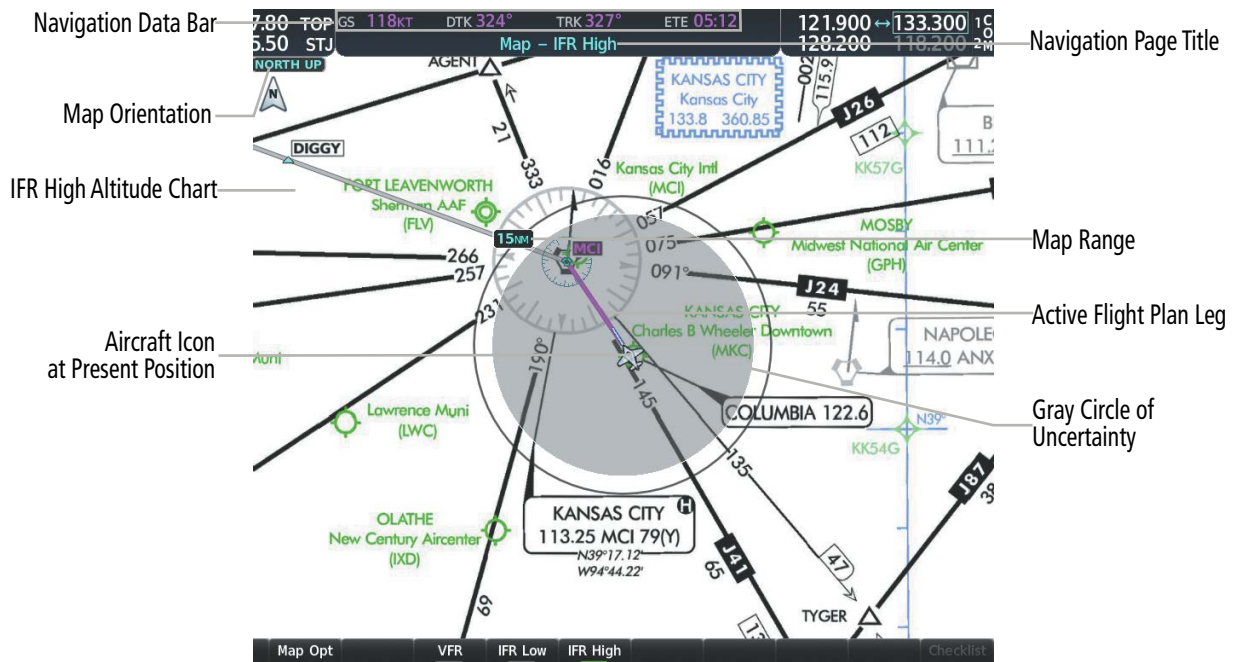


Figure 8-29 GPS Navigation Information on the IFR High Altitude Chart

8.4 AIRPORT DIRECTORY

The Aircraft Owners and Pilots Association™ (AOPA) and optional AC-U-KWIK Airport Directory databases offer detailed information regarding services, hours of operation, lodging options, and more. This information is viewed on the Airport Information Page by pressing the Info Softkey until **Info 2** is displayed.

Both Airport Directories are available for downloading at flygarmin.com. However, copy only one of the databases to the Supplemental Data Card. The system cannot recognize both databases simultaneously.

Selecting the 'WPT - Airport Directory' Page:

- 1) Turn the large **FMS** Knob to select the 'WPT' Page Group.
- 2) Turn the small **FMS** Knob to select the 'WPT - Airport Information' Page. Initially, information for the airport closest to the aircraft's present position is displayed.
- 3) If necessary, press the **Info 1** Softkey until **Info 2** is displayed.

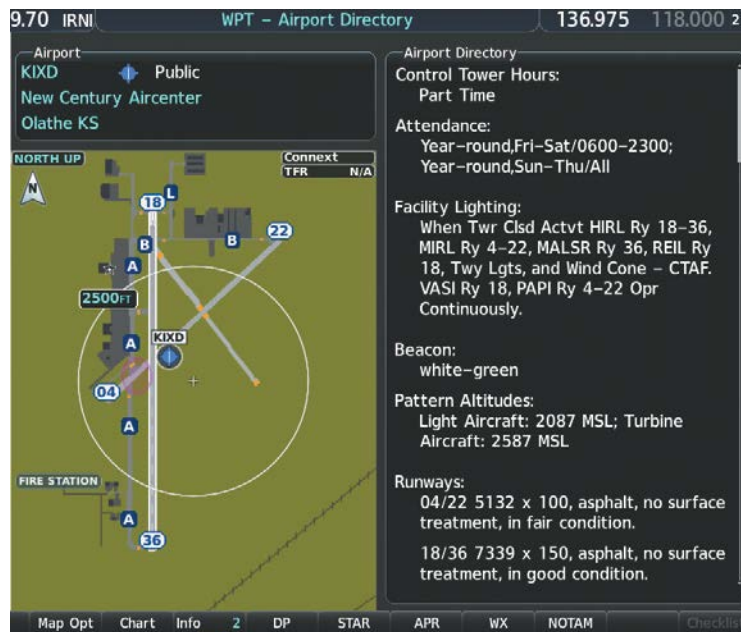


Figure 8-30 AOPA Information on the 'WPT - Airport Directory' Page

8.5 SIRIUSXM SATELLITE RADIO (OPTIONAL)



NOTE: Refer to the Hazard Avoidance Section for information about SiriusXM Weather products.

The optional SiriusXM Satellite Radio entertainment feature of the GDL 69A SXM Datalink Receiver is available for the pilot's and passengers' enjoyment. The GDL 69A SXM can receive SiriusXM Satellite Radio entertainment services at any altitude throughout the Continental U.S.

SiriusXM Satellite Radio offers a variety of radio programming over long distances without having to constantly search for new stations. Based on signals from satellites, coverage far exceeds land-based transmissions. SiriusXM Satellite Radio services are subscription-based. For more information on specific service packages, visit www.siriusxm.com.

ACTIVATING SIRIUSXM SATELLITE RADIO SERVICES

The service is activated by providing SiriusXM Satellite Radio with either one or two coded IDs, depending on the equipment. Either the Audio Radio ID or the Data Radio ID, or both, must be provided to SiriusXM Satellite Radio to activate the entertainment subscription.

It is not required to activate both the entertainment and weather service subscriptions with the GDL 69A SXM. Either or both services can be activated. SiriusXM Satellite Radio uses one or both of the coded IDs to send an activation signal that, when received by the GDL 69A SXM, allows it to play entertainment programming.

These IDs are located:

- On the label on the back of the Datalink Receiver
- On the 'Aux - XM Information' Page on the MFD
- On the XM Satellite Radio Activation Instructions included with the unit (available at www.garmin.com, P/N 190-00355-04)

Contact the installer if the Data Radio ID and the Audio Radio ID cannot be located.

Activating SiriusXM Satellite Radio services:

- 1) After gathering the Audio Radio ID and the Data Radio ID, contact SiriusXM and complete subscription activation.
- 2) Turn the large **FMS** Knob to select the 'Aux' Page Group.
- 3) Turn the small **FMS** Knob to select the 'Aux - XM Radio' Page.
- 4) Select the **Info** Softkey to display the 'Aux - XM Information' Page.
- 5) Verify the desired services are activated.

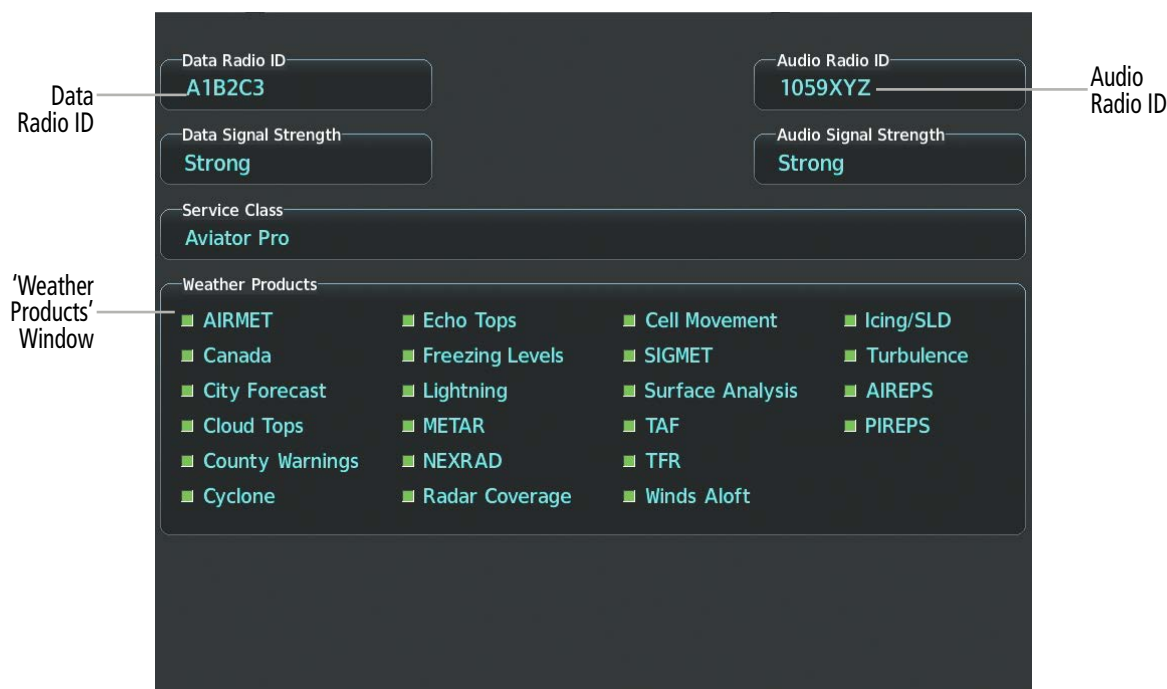


Figure 8-31 'Aux - XM Information' Page

If SiriusXM Weather services have not been activated, all the weather product boxes are blank on the 'Aux - XM Information' Page and a yellow 'Activation Required' message is displayed in the center of the 'Map - Weather Data Link (CNXT)' Page. The 'Service Class' refers to the groupings of weather products available for subscription.

USING SIRIUSXM RADIO

The 'Aux - XM Radio' Page provides information and control of the audio entertainment features of the SiriusXM Satellite Radio.

Selecting the 'Aux - XM Radio' Page:

- 1) Turn the large **FMS** Knob to select the 'Aux' Page Group.
- 2) Turn the small **FMS** Knob to select the 'Aux - XM Radio' Page.
- 3) If not already selected, press the **Radio** Softkey to show the 'Aux - XM Radio' Page where audio entertainment is controlled.

ACTIVE CHANNEL AND CHANNEL LIST

The 'Active Channel' Box on the 'Aux - XM Radio' Page displays the currently selected channel. The 'Channels' Box shows a list of the available channels for the selected category. Channels can be stepped through one at a time or may be selected directly by channel number.



Figure 8-32 'Aux - XM Radio' Page

Selecting a channel from the channel list:

- 1) While on the 'Aux - XM Radio' Page, press the **Channel** Softkey.
- 2) Press the **CH +** Softkey to go up through the list in the 'Channels' Box, or move down the list with the **CH -** Softkey.

Or:

- 1) Push the **FMS** Knob to highlight the channel list and turn the large **FMS** Knob to scroll through the channels.
- 2) Press the **ENT** Key to activate the selected channel.

Selecting a channel directly:

- 1) While on the 'Aux - XM Radio' Page, press the **Channel** Softkey.
- 2) Press the **Direct CH** Softkey. The channel number in the 'Active Channel' Box is highlighted.
- 3) Press the numbered softkeys located on the bottom of the display to directly select the desired channel number.
- 4) Press the **ENT** Key to activate the selected channel.

CATEGORY

The 'Category' Box of the 'Aux - XM Radio' Page displays the currently selected category of audio. Categories of channels such as jazz, rock, or news can be selected to list the available channels for a type of music or other contents. One of the optional categories is Presets to view channels that have been programmed.

Selecting a category:

- 1) Press the **Category** Softkey on the 'Aux - XM Radio' Page.
- 2) Press the **CAT +** and **CAT -** Softkeys to cycle through the categories.

Or:

Turn the small **FMS** Knob to display the Categories list. Highlight the desired category with the small **FMS** Knob and press the **ENT** Key. Selecting All Categories places all channels in the list.



Figure 8-33 Categories List

PRESETS

Up to 15 channels from any category can be assigned a preset number. The preset channels are selected by pressing the **Presets** and **More** Softkeys. Then the preset channel can be selected directly and added to the channel list for the Presets category.

Setting a preset channel number:

- 1) On the 'Aux - XM Radio' Page, while listening to an 'Active Channel' that is wanted for a preset, press the **Presets** Softkey to access the first five preset channels (**Preset 1 - Preset 5**).
- 2) Press the **More** Softkey to access the next five channels (**Preset 6 – Preset 10**), and again to access the last five channels (**Preset 11 – Preset 15**). Pressing the **More** Softkey repeatedly cycles through the preset channels.
- 3) Press any one of the (**Preset 1 - Preset 15**) softkeys to assign a number to the active channel.
- 4) Press the **Set** Softkey on the desired channel number to save the channel as a preset.

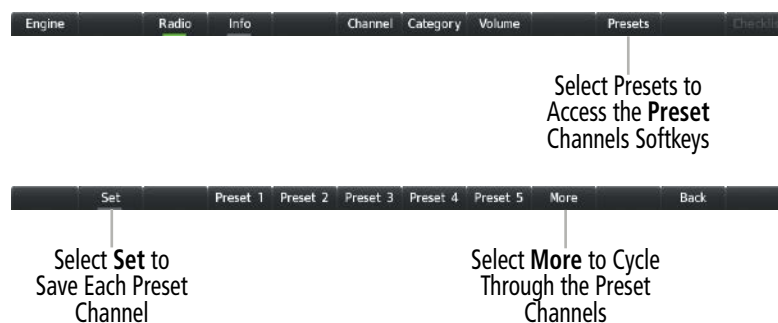


Figure 8-34 Accessing and Selecting SiriusXM Preset Channels

Pressing the **Back** Softkey, or 45 seconds of softkey inactivity, returns the system to the top level softkeys.

VOLUME

Radio volume is shown as a percentage. Volume level is controlled by pressing the **Volume** Softkey, which brings up the **Mute** Softkey and the volume increase and decrease softkeys.

Adjusting the volume:

- 1) With the 'Aux - XM Radio' Page displayed, press the **Volume** Softkey.
- 2) Press the **VOL –** Softkey to reduce volume or press the **VOL +** Softkey to increase volume. (Once the **VOL** Softkey is pressed, the volume can also be adjusted using the small **FMS** Knob.)




Figure 8-35 Volume Control

Muting SiriusXM audio:

- 1) Select the 'Aux - XM Radio' Page or 'Aux - XM Information' Page.
- 2) Press the **Mute** Softkey to mute the audio. Press the **Mute** Softkey again to unmute the audio.

8.6 FLIGHT DATA LOGGING



NOTE: Some aircraft installations may not provide all aircraft/engine data capable of being logged by the system.



NOTE: If a Wireless Transceiver (FS 510) is installed, Flight Data Logging will be available through Connexx and the Garmin Pilot™ application. See Garmin Pilot User's Guide for further information.

The Flight Data Logging feature will automatically store critical flight and engine data on an SD data card (up to 16GB) inserted into the top card slot of the MFD. Approximately 1,000 flight hours can be recorded for each 1GB of available space on the card.

Data is written to the SD card once each second while the MFD is powered on. All flight data logged on a specific date is stored in a file named in a format which includes the date, time, and nearest airport identifier. The file is created automatically each time the system is powered on, provided an SD card has been inserted.

The status of the Flight Data Logging feature can be viewed on the 'Aux - Utility' Page. If no SD card has been inserted, "NO CARD" is displayed. When data is being written to the SD card, "LOGGING DATA" is displayed. The .csv file may be viewed with Microsoft Excel® or other spreadsheet applications.

The following is a list of data parameters the system is capable of logging.

- | | | |
|-----------------------------------|--|--|
| • Local Date (YYYY-MM-DD) | • GPS Altitude (ft) | • Vertical Protection Level (VPLWAS, meters) |
| • Local Time (HH:MM:SS) | • Pitch Commanded (°) | • COM1 Frequency (MHz) |
| • Active Waypoint Distance (nm) | • Roll Commanded (°) | • COM2 Frequency (MHz) |
| • Active Waypoint Bearing (° mag) | • OAT (°C) | • Lateral Acceleration (g) |
| • UTC Offset (HH:MM) | • True Airspeed (kts) | • CDI Deflection (0.0 to 1.0) |
| • Mag. Variation (°) | • Selected Vertical Speed (fpm) | • VDI Deflection (0.0 to 1.0) |
| • Active Waypoint Identifier | • Vertical Speed (fpm) | • Normal Acceleration (g) |
| • Voltage 1 (volts) | • HSI Selection (GPS, NAV1/2) | • Heading (° mag.) |
| • Voltage 2 (volts) | • GPS Fix (e.g. 2D, 3D, 3DDiff) | • Course (°) |
| • Amps 1 (amps) | • Indicated Airspeed (kts) | • Wind Direction (° mag.) |
| • Amps 2 (amps) | • Horizontal Alert Limit (HAL, meters) | • Wind Speed (kts) |
| • AFCS On (0 – false, 1 – true) | • Gnd Speed (kts) | • Gnd Trk (° mag.) |
| • Latitude (°) | • Vertical Alert Limit (VAL, meters) | • Fuel Flow (gph) |
| • AFCS Roll Mode (e.g., HDG, GPS) | • Vertical Speed (fpm) | • Fuel Press. (psi) |
| • Longitude (°) | • NAV1 Frequency (MHz) | • Oil Temperature (°F) |
| • Right Fuel Qty (gals or lbs) | • NAV2 Frequency (MHz) | • Oil Pressure (psi) |
| • Left Fuel Qty (gals or lbs) | • Horizontal Protection Level (HPLWAS, meters) | • Engine Speed (rpm) |
| • Center Fuel Qty (gals or lbs) | • Pitch (°) | • Power (%) |
| • AFCS Pitch Mode (e.g., ALT, GS) | • Roll (°) | • Np (rpm) |
| • Barometric Altitude (feet) | • Horizontal Protection Level (HPLFD, meters) | |
| • Altimeter Setting (in. Hg.) | | |

The file containing the recorded data will appear in the format shown in the following figure. This file can be imported into most computer spreadsheet applications.

Local Date
YYMMDD

Local 24hr Time
HHMMSS

Nearest Airport
(A blank will be
inserted if no
airport is found)

log_210530_093008_KSPH.csv

Figure 8-36 Log File Format

Data logging status can be monitored on the 'Aux - Utility' Page.

8.7 SATELLITE TELEPHONE AND SMS TEXT MESSAGING



NOTE: An account must be established to access the Iridium satellite network for voice/SMS.

The GSR 56 Iridium Transceiver provides an airborne low speed data link, Iridium Satellite Telephone service, and Short Message Service (SMS).

The telephone is available to the flight crew through the audio panel and headsets.

REGISTERING WITH GARMIN CONNEXT

A subscriber account must be established prior to using the Iridium Satellite System. Before setting up an Iridium account, obtain the serial number of the Iridium Transceiver (GSR 1) and the System ID by selecting the 'Aux - System Status' Page. Contact Garmin at flygarmin.com.

Registering the system for datalink services:

- 1) Using the **FMS** Knob, select the 'Aux - System Status' Page.
- 2) Touch the **LRU** Softkey, if not already selected.
- 3) Push the **FMS** Knob to activate the cursor.
- 4) Use the large **FMS** Knob to view 'GSR 1.'
- 5) Note the GSR 1 Serial Number. This number will be needed when contacting Garmin Connex to establish the account.



Figure 8-37 'Aux - System Status' Page

- 6) Also note the System ID. It is found in the 'Airframe' Box on the 'Aux - System Status' Page. The System ID will also be needed when contacting Garmin Connex.
- 7) Contact Garmin Connex to establish an account and receive an access code.

DISABLING/ENABLING IRIDIUM TRANSCEIVER

Iridium telephone and data communications may be turned on or off by performing these simple steps.

Disabling/enabling telephone and low speed data services:

- 1) Turn the large **FMS** Knob on the MFD to select the 'Aux' Page Group.
- 2) Turn the small **FMS** Knob to select the 'Aux - Satellite Phone' Page.
- 3) If necessary, press the **Phone** Softkey to display the 'Aux - Telephone' Page.

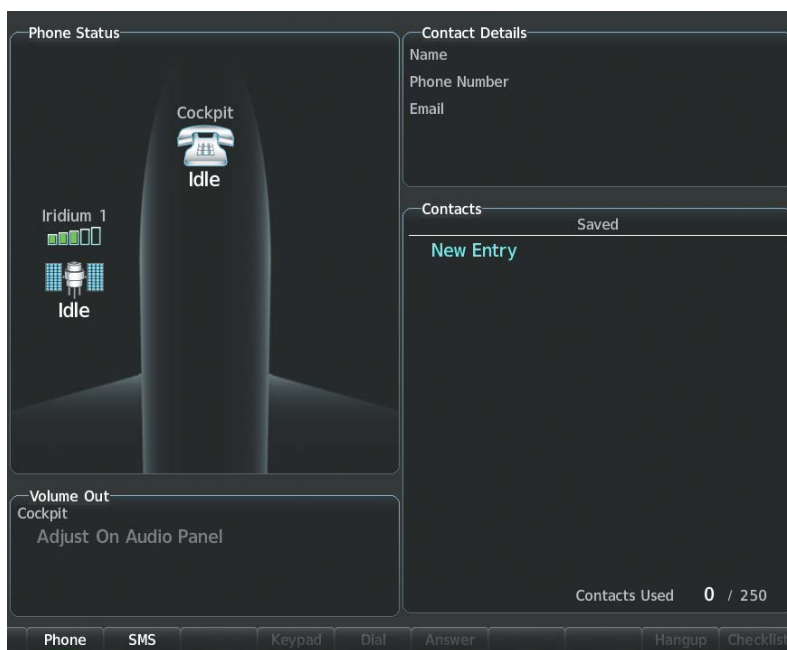


Figure 8-38 'Aux - Telephone' Page

- 4) Press the **MENU** Key. The 'Page Menu' Window is now displayed.
- 5) Turn the **FMS** Knob to select 'Disable Iridium Transmission' in the menu list.

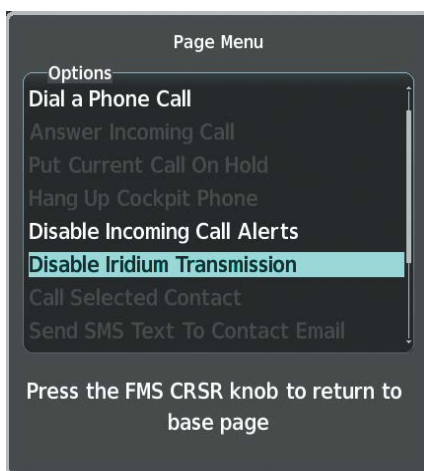


Figure 8-39 Select Disable Iridium Transmission

- 6) Press the **ENT** Key. The Iridium transceiver is now disabled.
- 7) To enable the Iridium transceiver, repeat steps 1 through 4, then select 'Enable Iridium Transceiver'.








TELEPHONE COMMUNICATION

The pilot or copilot can place and answer calls on the Iridium satellite network. Control and monitoring of telephone functions are accomplished through the 'Aux - Telephone' Page.

Viewing the 'Aux - Telephone' Page:

- 1) Turn the large **FMS** Knob on the MFD to select the 'Aux' Page Group.
- 2) Turn the small **FMS** Knob to select the 'Aux - Satellite Phone' Page.
- 3) If necessary, press the **Phone** Softkey to display the 'Aux - Telephone' Page.

The phone status display gives a graphical representation of the current disposition of voice and/or data transmissions.

Internal Phone	External Phone	Description
 Idle	 Idle	Phone is Idle
 Ringing	 Ringing	Phone is ringing
 Connected	 Connected	Phone has a dial tone (off hook) or connected to another phone
 Busy	 Busy	Phone dialed is busy
 Dialing	 Dialing	Phone is dialing another phone
 Failed	 Failed	Phone has failed
 Unknown	 Unknown	Phone status not known
	 Disabled	Phone is disabled
	 DATA TX	Phone is reserved for data transmission

Internal Phone	External Phone	Description
		Calling other phone or incoming call from other phone
		Other phone is on hold
		Phones are connected

Table 8-1 Telephone Symbols

CONTACTS

The names, telephone number, and email addresses can be saved in a list of contacts for easy use when making telephone calls.

Entering a new contact:

- 1) With the 'Aux - Telephone' Page displayed, push the **FMS** Knob to display the cursor.
- 2) If necessary, turn either **FMS** Knob to place the cursor on 'New Entry'.
- 3) Press the **ENT** Key. The cursor moves the 'Name' field of the 'Contact Details' Window.
- 4) Enter the desired name of the new contact. Entry can be accomplished through the alphanumeric keys on the MFD Controller, or the **FMS** Knobs on the controller or the MFD.
- 5) Press the **ENT** Key. The cursor moves to the 'Phone Number' field.
- 6) Enter the desired telephone number. Entry can be accomplished through the alphanumeric keys on the MFD Controller, or the **FMS** Knobs on the controller or the MFD.
- 7) Press the **ENT** Key. The cursor moves to the 'Email' field.
- 8) Enter the desired email address. Entry can be accomplished through the alphanumeric keys on the MFD Controller, or the **FMS** Knobs on the controller or the MFD.
- 9) Press the **ENT** Key. The **Save** button is highlighted.
- 10) Press the **ENT** Key. The new contact entry is added to the list of saved contacts.

Deleting a contact:

- 1) With the 'Aux - Telephone' Page displayed, push the **FMS** Knob to display the cursor.
- 2) Turn either **FMS** Knob to place the cursor on the desired contact name.
- 3) Press the **Delete** Softkey. A confirmation window is displayed.
- 4) With 'OK' highlighted, press the **ENT** Key to delete the selected contact.

Editing a contact:

- 1) With the 'Aux - Telephone' Page displayed, push the **FMS** Knob to display the cursor.
- 2) Turn either **FMS** Knob to place the cursor on the desired contact name.

- 3) Press the **Edit** Softkey. The cursor is placed in the 'Name' field. Enter the desired changes. Entry can be accomplished through the alphanumeric keys on the MFD Controller, or the **FMS** Knobs on the controller or the MFD.
- 4) Press the **ENT** Key when each field is complete. The **Save** Button is now highlighted.
- 5) Press the **ENT** Key to save the changes.

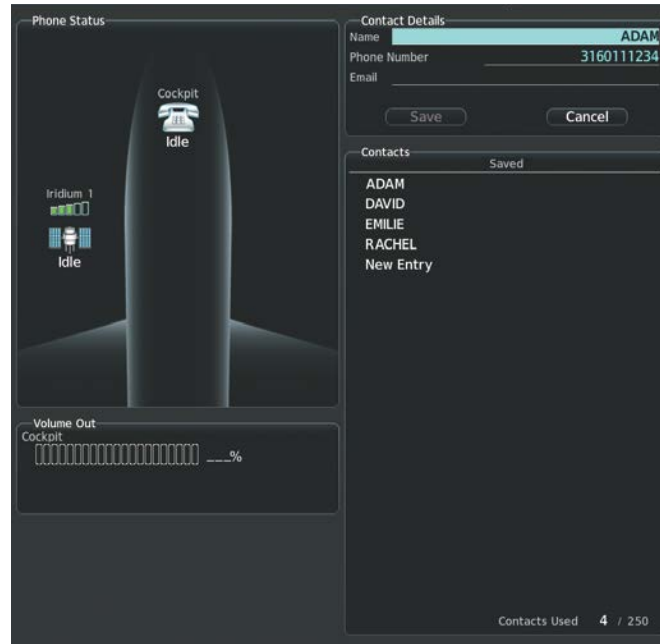


Figure 8-40 Editing a Contact

INCOMING CALLS

When viewing MFD pages other than the 'Aux - Telephone' Page, a pop-up alert will be displayed and an aural alert "Incoming Call" will be heard. If the incoming call is an Iridium network call, Iridium will be displayed. The pop-up alert may be inhibited at times, such as during takeoff. In addition to the pop-up alert, a ringing phone symbol will be displayed to the right of the MFD page title. Also, the voice alert "Incoming Call" will be heard on the selected cockpit audio.



NOTE: The Push-to-Talk switch is not utilized for telephone communication. The microphone is active after pressing the **Answer** Softkey, and stays active until the call is terminated.

Answering an incoming call in the cockpit:

- 1) Press the **Phone** Key on the appropriate audio panel.
- 2) Press the **Answer** Softkey on the MFD.

Or:

While viewing the 'Aux - Telephone' Page

- 1) Press the **Phone** Key on the appropriate audio panel.
- 2) Press the **MENU** Key to display the Page Menu.
- 3) Turn either **FMS** Knob to place the cursor on 'Answer Incoming Call'.
- 4) Press the **ENT** Key.

Pressing the **Ignore** Softkey will extinguish the pop-up window and leave the call unanswered. Pressing the **Phone** Softkey will display the 'Aux - Telephone' Page allowing additional call information to be viewed before answering.

Muting incoming call alerts:

- 1) With the 'Aux - Telephone' Page displayed, press the **MENU** Key on the MFD to display the Page Menu.
- 2) Turn either **FMS** Knob to place the cursor on 'Disable Incoming Call Alerts'.
- 3) Press the **ENT** Key. The voice and pop-up alert will not be displayed now when an incoming call is received.

OUTGOING CALLS

Voice calls can be made from the cockpit to an external phone through the Iridium Satellite Network.

The International dialing sequence is necessary to place a call from the cockpit to an external phone: Country Code + City/Area Code (if any) + Telephone Number. The following country codes may be used when calling other satellite telephone systems.

Satellite System	Country Code
Inmarsat	870
ICO	8810 or 8811
Ellipso	8812 or 8813
Iridium	8816 or 8817
Globalstar	8818 or 8819

Table 8-2 Country Codes

Making an external call from the cockpit using the Iridium satellite network:

- 1) Press the **Phone** Key on the appropriate audio panel.
- 2) Press the **Dial** Softkey on the MFD.
- 3) Turn the small **FMS** Knob to select 'Iridium'.
- 4) Press the **ENT** Key. The cursor has now moved to the phone number entry field.

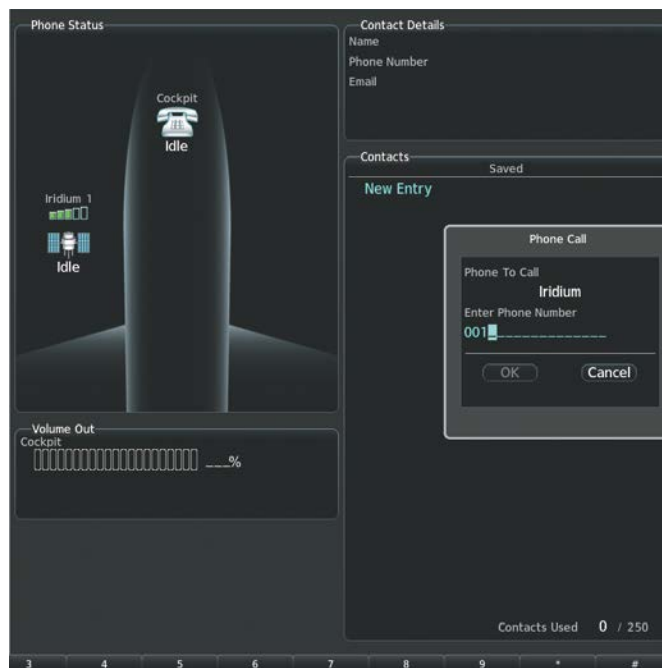


Figure 8-41 Enter Phone Number

- 5) Enter the desired telephone number (country code first) by pressing the number softkeys on the MFD.
- 6) Press the **ENT** Key. 'OK' is highlighted.

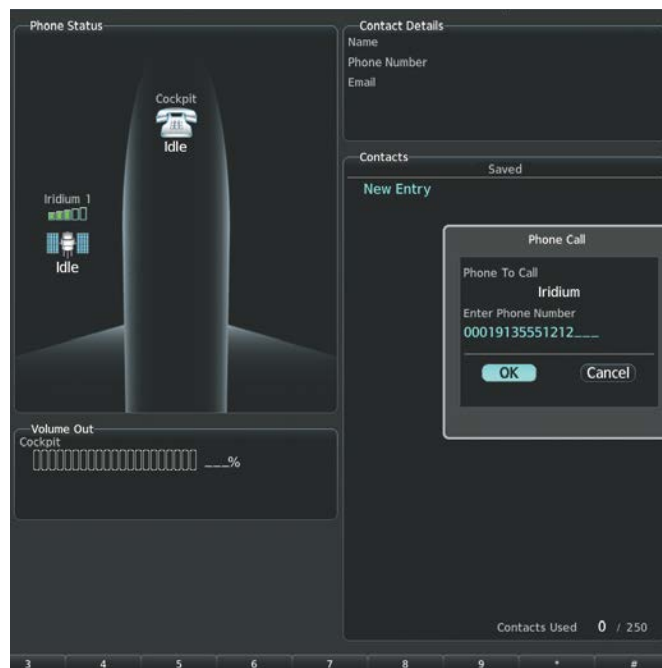


Figure 8-42 Make the Call

- 7) Press the **ENT** Key. The system will begin calling the number.

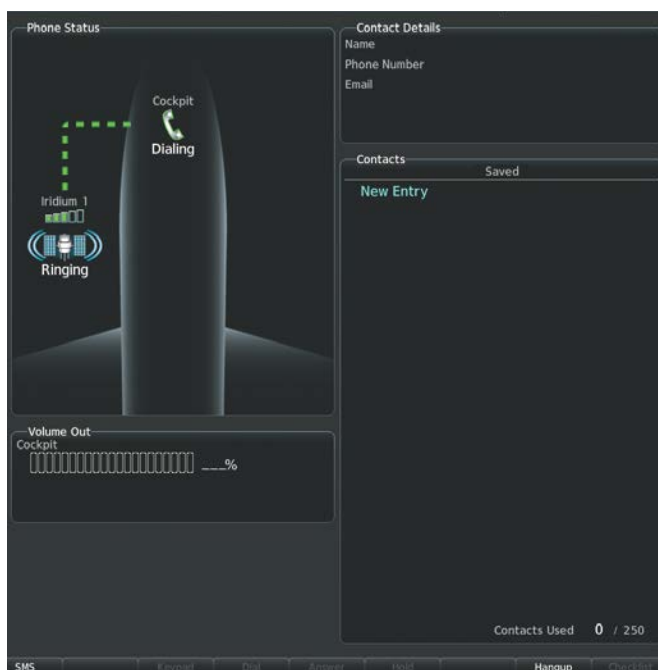


Figure 8-43 System is Making the Connection

When the phone is answered, the connection is established. To exit the call, press the **Hangup** Softkey.

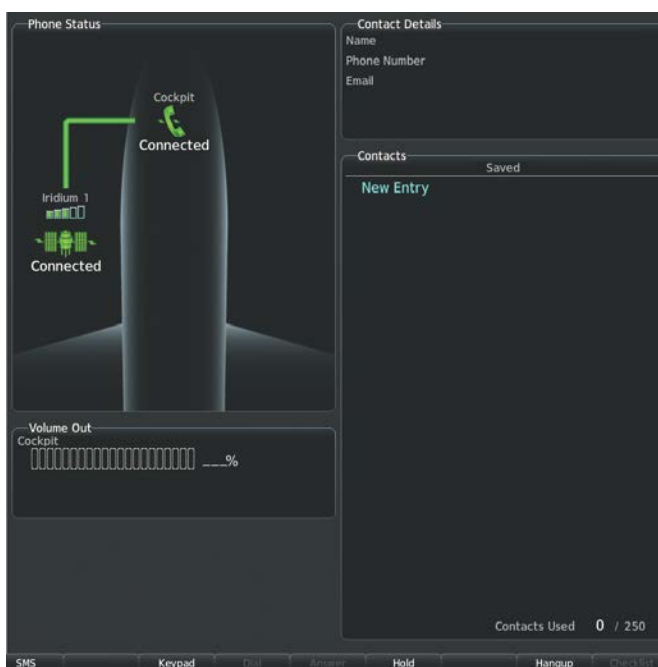


Figure 8-44 Phone is Answered, Connection Complete

Making an external call from the cockpit by using the contact list:

- 1) Press the **Phone** Key on the appropriate audio panel.
- 2) Push the **FMS** Knob to activate the cursor.
- 3) Turn the small **FMS** Knob to select the desired contact name in the list of contacts.
- 4) Press the **Call** Softkey. The external call is initiated and the number associated with the contact name is dialed.

PLACING THE COCKPIT PHONE ON HOLD

Placing a call on hold:

Press the **Hold** Softkey on the MFD.

Or:

- 1) Press the **MENU** Key to display the Page Menu.
- 2) Turn either **FMS** Knob to place the cursor on 'Put Current Call On Hold'.
- 3) Press the **ENT** Key.

The cockpit phone is now isolated from the call. This figure illustrates a call between the cockpit and an external phone in which the cockpit phone has been put on hold. Press the **Hold** Softkey again to resume the call.

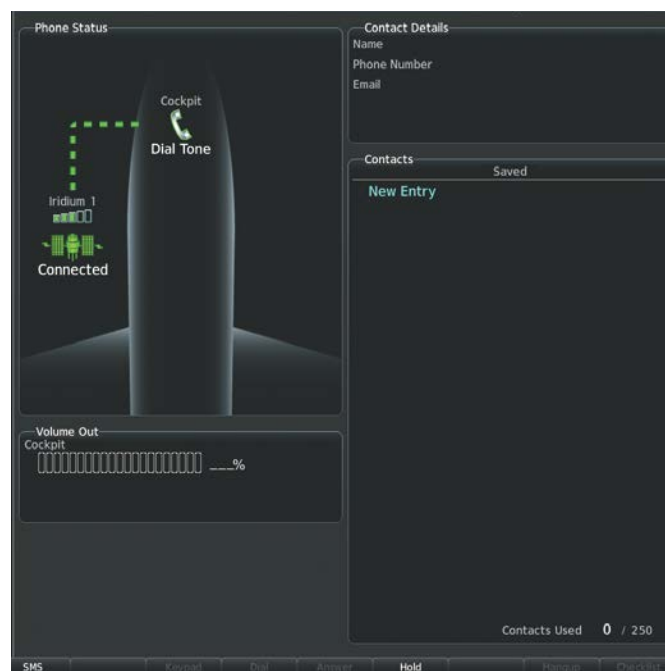


Figure 8-45 Cockpit Phone on Hold

TEXT MESSAGING (SMS)

The pilot or copilot can send and receive text messages on the Iridium satellite network. Messages may be sent to an email address or text message capable cellular telephone. Message length is limited to 160 characters, including the email address. Senders should address text messages to aircraft by entering [aircraft Iridium phone number]@msg.iridium.com.

The text messaging user interface is mainly through the ‘Aux - Text Messaging’ Page.

Viewing the ‘Aux - Text Messaging’ Page:

- 1) Turn the large **FMS** Knob on the MFD to select the ‘Aux’ Page Group.
- 2) Turn the small **FMS** Knob to select the ‘Aux - Telephone’ or ‘Aux - Text Messaging’ Page.
- 3) If necessary, press the **SMS** Softkey to display the ‘Aux - Text Messaging’ Page.



Figure 8-46 ‘Aux - Text Messaging’ Page

Message Symbol	Description
	Received text message that has not been opened
	Received text message that has been opened
	Saved text message, draft not sent
	System is sending text message

Message Symbol	Description
	Text message has been sent
	System failed to send text message
	Predefined text message


Table 8-3 Text Message Symbols

VIEWING A TEXT MESSAGE WHEN RECEIVED

When viewing MFD pages other than the ‘Aux - Text Messaging’ Page, a pop-up alert will be displayed when a new text message is received.



New Text Message Pop-up



New Text Message Symbol on MFD Page

Figure 8-47 New Text Message Received

Press the **View** Softkey to view the message. Pressing the **Ignore** Softkey will extinguish the pop-up window and leave the text message unopened. Pressing the **Ignore All** Softkey will extinguish the pop-window and ignore all future incoming text messages. Pressing the **SMS** Softkey will display the ‘Aux - Text Messaging’ Page.



Figure 8-48 Text Message Displayed from Pop-Up Alert

The pop-up alerts may be enabled or disabled through the Page Menu.

Enabling/disabling incoming text message pop-up alerts:

- 1) With the 'Aux - Text Messaging' Page displayed, press the **MENU** Key on the MFD to display the Page Menu.
- 2) Turn either **FMS** Knob to place the cursor on 'Disable New Message Popups' or 'Enable New Message Popups'.
- 3) Press the **ENT** Key. The pop-up alert will not be displayed when an incoming text message is received.

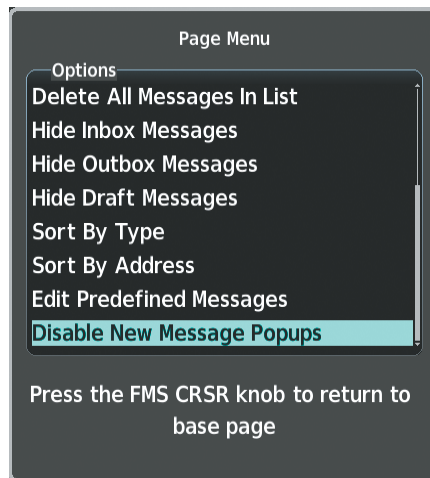


Figure 8-49 Disabling New Text Message Pop-Ups

REPLY TO A TEXT MESSAGE

After reading a text message, a reply may be sent.

Replying to a text message:

While viewing the text message, press the **Reply** Softkey.

Or:

- 1) Press the **MENU** Key to display the Page Menu.
- 2) Turn either **FMS** Knob to place the cursor on 'Reply To Message'.
- 3) Press the **ENT** Key.

SENDING A TEXT MESSAGE

Text messages may be sent from the 'Aux - Text Messaging' Page.

Sending a new text message:

- 1) While viewing the 'Aux - Text Messaging' Page, press the **New** Softkey.
- Or:
- a) Press the **MENU** Key to display the Page Menu.
 - b) Turn either **FMS** Knob to place the cursor on 'Draft New Message'.
 - c) Press the **ENT** Key.

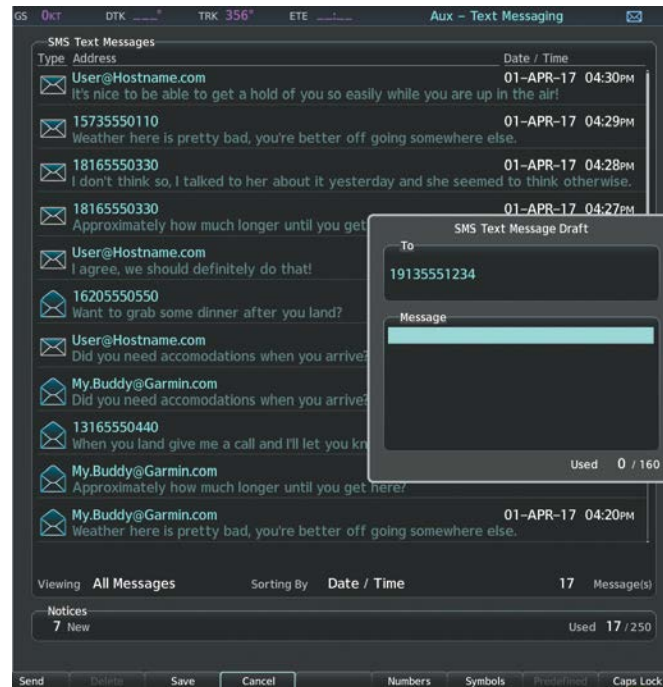


Figure 8-50 Composing a New Text Message

- 2) The 'SMS Text Message Draft' Window is now displayed with the cursor in the 'To' Field. Enter the desired telephone number or email address. Entry can be accomplished through the alphanumeric keys on the MFD Controller, or combination of the **FMS** Knob on the controller and softkeys on the MFD. The **FMS** Knob is used to enter letters and numbers, or numbers can be entered from the MFD by pressing the **Numbers** Softkey. Press the **CapsLock** Softkey to create upper and lower case alpha characters. Special characters can be accessed by pressing the **Symbols** Softkey.
- 3) Press the **ENT** Key. The cursor is now displayed in the 'Message' field.
- 4) Enter the desired message using any combination of entry methods as described in step 2.
- 5) Press the **ENT** Key.
- 6) Press the **Send** Softkey to send the message immediately, or press the **Save** Softkey to save the message in Outbox for sending at a later time. Press the **Cancel** Softkey to delete the message.

PREDEFINED TEXT MESSAGES

Time and effort can be saved in typing text messages that are used repeatedly by saving these messages as a predefined message.

Creating a predefined text message:

- 1) While viewing the 'Aux - Text Messaging' Page, press the **MENU** Key to display the Page Menu.
- 2) Turn either **FMS** Knob to select 'Edit Predefined Messages'.

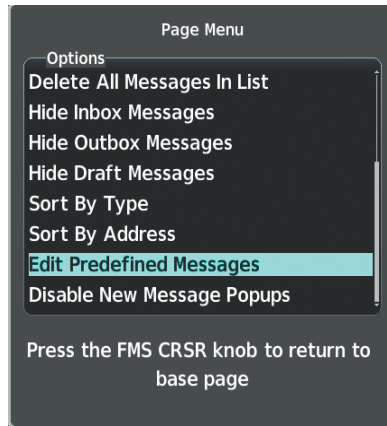


Figure 8-51 Creating/Editing Predefined Messages

- 3) Press the **ENT** Key. The Predefined Messages view is now displayed.
- 4) Press the **New** Softkey.
 - Or:
 - a) Press the **MENU** Key to display the Page Menu.
 - b) Turn either **FMS** Knob to place the cursor on 'Draft New Predefined Message'.
 - c) Press the **ENT** Key. The 'Predefined SMS Text Message' Window is now displayed.

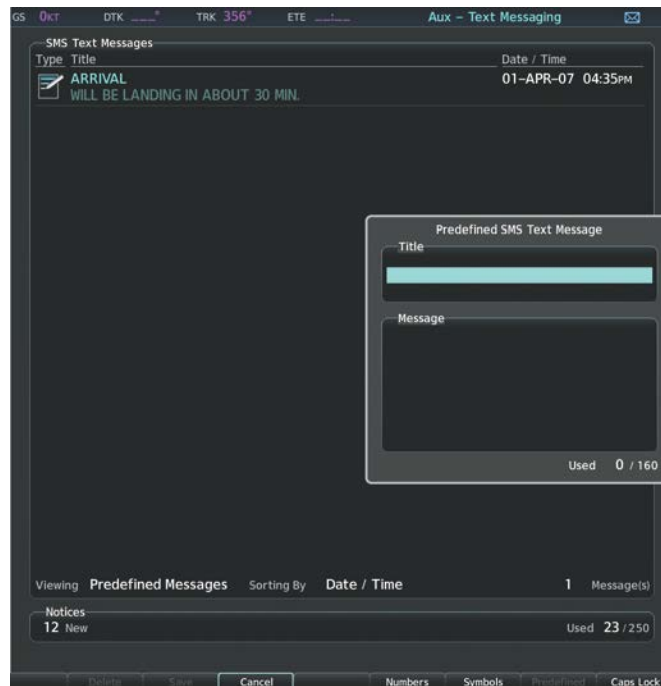


Figure 8-52 Composing a Predefined Message

- 5) The cursor is displayed in the 'Title' field. Enter the desired message title. Entry can be accomplished through the alphanumeric keys on the MFD Controller, or combination of the **FMS** Knob on the controller and softkeys on the MFD. The **FMS** Knob is used to enter letters and numbers, or numbers can be entered from the MFD by pressing the **Numbers** Softkey. Press the **CapsLock** Softkey to create upper and lower case alpha characters. Special characters can be accessed by pressing the **Symbols** Softkey.
- 6) Press the **ENT** Key. The cursor is now displayed in the 'Message' field.
- 7) Enter the desired message using any combination of entry methods as described in step 5.
- 8) Press the **ENT** Key.
- 9) Press the **Save** Softkey. The new predefined message is now shown in the displayed list. Pressing the **Cancel** Softkey will delete the message without saving.
- 10) Press the **MENU** Key to display the Page Menu.
- 11) Turn either **FMS** Knob to place the cursor on 'Cancel Drafting Message'.
- 12) Press the **ENT** Key.

Sending a predefined text message:

- 1) While viewing the 'Aux - Text Messaging' Page, press the **New** Softkey.
- 2) The 'Predefined SMS Text Message' Window is now displayed with the cursor in the 'To' Field. Enter the desired telephone number or email address. Entry can be accomplished through the alphanumeric keys on the MFD Controller, or combination of the **FMS** Knob on the controller and softkeys on the MFD. The **FMS** Knob is used to enter letters and numbers, or numbers can be entered from the MFD by pressing the **Numbers** Softkey. Press the **CapsLock** Softkey to create upper and lower case alpha characters. Special characters can be accessed by pressing the **Symbols** Softkey.
- 3) Press the **ENT** Key. The cursor is now displayed in the 'Message' field.
- 4) Press the **Predefined** Softkey. The 'Predefined Message Menu' Window is displayed.
- 5) Turn either **FMS** Knob to select the desired predefined message.
- 6) Press the **ENT** Key. The predefined message text is inserted into the message field. If desired, the message can be edited by using the FMS Knobs.
- 7) Press the **ENT** Key.
- 8) Press the **Send** Softkey to transmit the message.

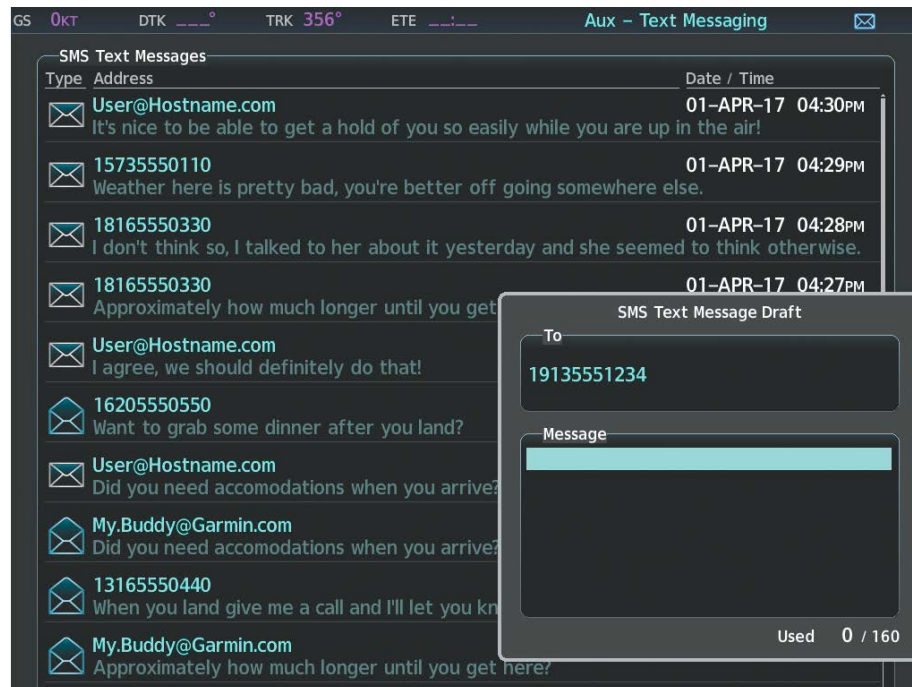


Figure 8-53 Predefined Message Softkey Shown When Composing a Message

TEXT MESSAGE BOXES

Received text messages reside in the Inbox as 'Read' or 'Unread' messages. The Outbox contains 'Sent' and 'Unsent' text messages. Saved messages that are meant to be sent later are stored as Drafts. Each text message box may be viewed separately, or together in any combination.

Viewing Inbox messages:

While viewing the 'Aux - Text Messaging' Page, press the **Arrange** Softkey, then press the **Inbox** Softkey.

Or:

- 1) Press the **MENU** Key to display the Page Menu.
- 2) Turn either **FMS** Knob to place the cursor on 'Show Inbox Messages'.
- 3) Press the **ENT** Key. The message box selected for viewing is indicated at the bottom left of the list window.



Figure 8-54 Text Message Inbox

Viewing Outbox messages:

While viewing the 'Aux - Text Messaging' Page, press the **Arrange** Softkey, then press the **Outbox** Softkey.

Or:

- 1) Press the **MENU** Key to display the Page Menu.
- 2) Turn either **FMS** Knob to place the cursor on 'Show Outbox Messages'.
- 3) Press the **ENT** Key. The message box selected for viewing is indicated at the bottom left of the list window.

Viewing Draft messages:

While viewing the 'Aux - Text Messaging' Page, press the **Arrange** Softkey, then press the **Drafts** Softkey.

Or:

- 1) Press the **MENU** Key to display the Page Menu.
- 2) Turn either **FMS** Knob to place the cursor on 'Show Draft Messages'.
- 3) Press the **ENT** Key. The message box selected for viewing is indicated at the bottom left of the list window.

MANAGING TEXT MESSAGES

The viewed messages may be listed according to the date/time the message was sent or received, the type of message (read, unread, sent, unsent, etc.), or the message address.

Viewing messages sorted by message date/time:

While viewing the 'Aux - Text Messaging' Page, press the **Arrange** Softkey, then press the **Time** Softkey.

Or:

- 1) Press the **MENU** Key to display the Page Menu.
- 2) Turn either **FMS** Knob to place the cursor on 'Sort By Date/Time'.
- 3) Press the **ENT** Key. The sorting selection is indicated at the bottom center of the list window.

Viewing messages sorted by message type:

While viewing the 'Aux - Text Messaging' Page, press the **Arrange** Softkey, then press the **Type** Softkey.

Or:

- 1) Press the **MENU** Key to display the Page Menu.
- 2) Turn either **FMS** Knob to place the cursor on 'Sort By Type'.
- 3) Press the **ENT** Key. The sorting selection is indicated at the bottom center of the list window.

Viewing messages sorted by address:

While viewing the 'Aux - Text Messaging' Page, press the **Arrange** Softkey, then press the **Address** Softkey.

Or:

- 1) Press the **MENU** Key to display the Page Menu.
- 2) Turn either **FMS** Knob to place the cursor on 'Sort By Address'.
- 3) Press the **ENT** Key. The sorting selection is indicated at the bottom center of the list window.

Viewing the content of a text message:

- 1) While viewing the 'Aux - Text Messaging' Page, select the desired message box.
- 2) Push the **FMS** Knob to activate the cursor.
- 3) Turn either **FMS** Knob to select the desired message.
- 4) Press the **VIEW** Softkey.

Or:

Press the **ENT** Key.

Or:

- a) Press the **MENU** Key to display the Page Menu.
- b) Turn either **FMS** Knob to place the cursor on 'View Selected Message'.
- c) Press the **ENT** Key.

Message content is displayed.

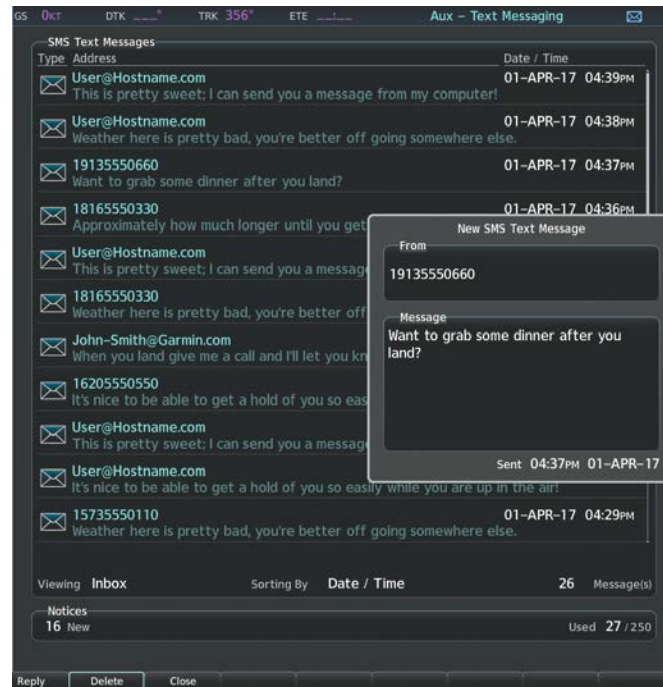


Figure 8-55 Viewing Message Content

- 5) To close the text message, press the **Close** Softkey.

Or:

- a) Press the **MENU** Key to display the Page Menu.
- b) Turn either **FMS** Knob to place the cursor on 'Close Message'.
- c) Press the **ENT** Key.

Marking selected message as read:

- 1) While viewing the Inbox on the 'Aux - Text Messaging' Page, push the **FMS** Knob to activate the cursor.
- 2) Turn either **FMS** Knob to select the desired message.
- 3) Press the **MRK Read** Softkey.

Or:

- a) Press the **MENU** Key to display the Page Menu.
- b) Turn either **FMS** Knob to place the cursor on 'Mark Selected Message As Read'.
- c) Press the **ENT** Key.

The message symbol now indicates the message has been opened.

Marking all messages as read:

- 1) While viewing the Inbox on the 'Aux - Text Messaging' Page, press the **MENU** Key to display the Page Menu.
- 2) Turn either **FMS** Knob to place the cursor on 'Mark All New Messages As Read'.
- 3) Press the **ENT** Key. A confirmation window is displayed.
- 4) With cursor highlighting 'YES', press the **ENT** Key. The message symbols now indicate all the message have been opened.

Deleting a message:

- 1) While viewing the Inbox on the 'Aux - Text Messaging' Page, push the **FMS** Knob to activate the cursor.
- 2) Turn either **FMS** Knob to select the desired message.
- 3) Press the **Delete** Softkey.

Or:

- a) Press the **MENU** Key to display the Page Menu.
- b) Turn either **FMS** Knob to place the cursor on 'Delete Selected Message'.
- c) Press the **ENT** Key.

8.8 CONNEXT (OPTIONAL)

The 'Aux - Connex Setup' Page allows for setting up the installed optional Flight Stream 510 device for a Bluetooth connection between the system and a mobile device running the Garmin Pilot™ application.

The mobile device must be 'paired' with the system in order to use the various functions. Pairing is accomplished by first placing the system in pairing mode by displaying the 'Aux - Connex Setup' Page. The system is 'discoverable' whenever this page is displayed. The pairing operation is completed from the mobile device and the Garmin Pilot™ application. See the device Bluetooth pairing instructions and the connection instructions in the Garmin Pilot™ application.

Viewing the 'Aux - Connex Setup' Page:

- 1) Turn the large **FMS** Knob on the MFD to select the 'Aux' Page Group.
- 2) Turn the small **FMS** Knob to select the 'Aux - Connex Setup' Page.

Changing the Bluetooth name:

- 1) While viewing the 'Aux - Connex Setup' Page, push the **FMS** Knob to activate the cursor.
- 2) Turn the large **FMS** Knob to place the cursor in the 'Bluetooth Name' Field.
- 3) Enter the desired name by using the large **FMS** Knob to select the character field, and the small **FMS** Knob select the desired alphanumeric character for that field.
- 4) Press the **ENT** Key. The cursor is removed and the new name is displayed.



Figure 8-56 Changing the Bluetooth Name

Enabling/disabling flight plan importing from Garmin Pilot:

- 1) While viewing the 'Aux - Connex Setup' Page, push the **FMS** Knob to activate the cursor.
- 2) Turn the large **FMS** Knob to place the cursor in the 'Flight Plan Import' field.
- 3) Turn the small **FMS** Knob to select 'Enabled' or 'Disabled'.
- 4) Push the **FMS** Knob to remove the cursor.




Figure 8-57 Flight Plan Import Enabled

Enabling/disabling WiFi database importing from Garmin Pilot:

- 1) While viewing the 'Aux - Connex Setup' Page, push the **FMS** Knob to activate the cursor.
- 2) Turn the large **FMS** Knob to place the cursor in the 'WiFi Database Import' field.
- 3) Turn the small **FMS** Knob to select 'Enabled' or 'Disabled'.
- 4) Push the **FMS** Knob to remove the cursor.



Figure 8-58 WiFi Database Disabled

Enabling/disabling automatic reconnection of a paired device:

- 1) While viewing the 'Aux - Connex Setup' Page, push the **FMS** Knob to activate the cursor.
- 2) Turn the large **FMS** Knob to highlight the desired paired device.
- 3) Turn the small **FMS** Knob to select 'Enabled' or 'Disabled'. Selecting 'Enabled' allows the system to automatically connect to a previously paired device when detected.
- 4) Push the **FMS** Knob to remove the cursor.

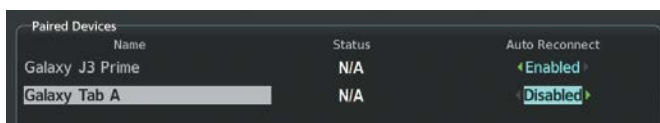


Figure 8-59 Auto Reconnect Disabled

Removing a paired device from the 'Paired Devices' Box:

- 1) While viewing the 'Aux - Connex Setup' Page, push the **FMS** Knob to activate the cursor.
- 2) Turn the large **FMS** Knob to highlight the desired paired device.
- 3) Press the **Remove** Softkey. A confirmation screen is displayed.
- 4) If necessary, turn the large **FMS** Knob to select 'Yes'.
- 5) Press the **ENT** Key to remove the device from the list of paired devices.

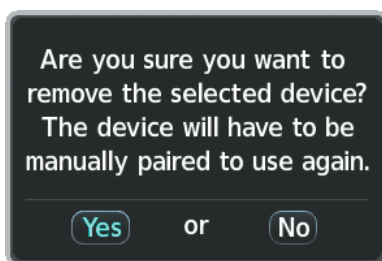


Figure 8-60 Removing a Paired Device

8.9 ELECTRONIC STABILITY AND PROTECTION (ESP)(OPTIONAL)



NOTE: Refer to the Airplane Flight Manual to determine approval of ESP functionality.

Electronic Stability and Protection (ESP™) is an optional feature that is part of the Garmin Autonomi™ family of autonomous safety-enhancing technologies. This feature designed to provide automatic control inputs to discourage aircraft operation outside a normal flight envelope. Garmin ESP works to maintain the desired pitch, roll, and airspeed operating envelope by automatically engaging one or more servos when the aircraft is near a defined pitch, roll, and/or airspeed operating limit. While ESP utilizes the same sensors, processors, and actuators as the autopilot, it is a separate function. The ESP system only operates when autopilot is not engaged and the aircraft is above 200 feet AGL.

ESP engages when the aircraft exceeds one or more conditions (pitch, roll, and airspeed) beyond the normal flight parameters. Enhanced stability for each condition is provided by applying a force to the appropriate control surface to return the aircraft to the normal flight envelope. This is perceived by the pilot as resistance to control movement in the undesired direction when the aircraft approaches a steep attitude or high airspeed.

As the aircraft deviates further from the normal attitude and/or airspeed range, the force increases (up to an established maximum) to encourage control movement in the direction necessary to return to the normal attitude and/or airspeed range. Except in the case of high airspeed, when maximum force is reached, force remains constant up to the maximum engagement limit. Above the maximum engagement limit, forces are no longer applied. There is no maximum engagement related to a high airspeed condition.

When ESP has been engaged for more than ten seconds (cumulative; not necessarily consecutive seconds) of a 20-second interval, the autopilot is automatically engaged, bringing the aircraft into level flight. An aural “Engaging Autopilot” alert is played and the flight director mode annunciation will indicate ‘LVL’ for vertical and lateral modes.

The pilot can interrupt ESP by pressing and holding the Autopilot Disconnect (**AP DISC**) switch or the Control Wheel Steering (**CWS**) button. Upon releasing **AP DISC** or **CWS**, ESP force will again be applied, provided aircraft roll attitude is within engagement limits. ESP can also be overridden by overpowering the servo’s mechanical torque limit.

ESP can be enabled or disabled on the ‘Aux - System Setup 2’ Page on the MFD.

Enabling/disabling ESP:

- 1) Turn the large **FMS** Knob to select the ‘Aux’ Page Group.
- 2) Turn the small **FMS** Knob to select the ‘Aux - System Setup’ Page.
- 3) If necessary, press the **Setup 2** Softkey to display the ‘Aux - System Setup 2’ Page. If the ‘Aux - System Setup 2’ Page is already displayed, proceed to step 4.
- 4) Push the **FMS** Knob to activate the cursor.
- 5) Turn the large **FMS** Knob to place the cursor in the Stability & Protection field.
- 6) Turn the small **FMS** Knob to select ‘Enabled’ or ‘Disabled’.
- 7) Push the **FMS** Knob to remove the cursor.

ESP is automatically enabled when applying system power.

ROLL ENGAGEMENT

Roll Limit Indicators are displayed on the roll scale at 45° right and left, indicating where ESP will engage. As roll attitude exceeds 45°, ESP will engage and the on-side Roll Limit Indicator will move to 30°. The Roll Limit Indicator is now showing where ESP will disengage as roll attitude decreases.

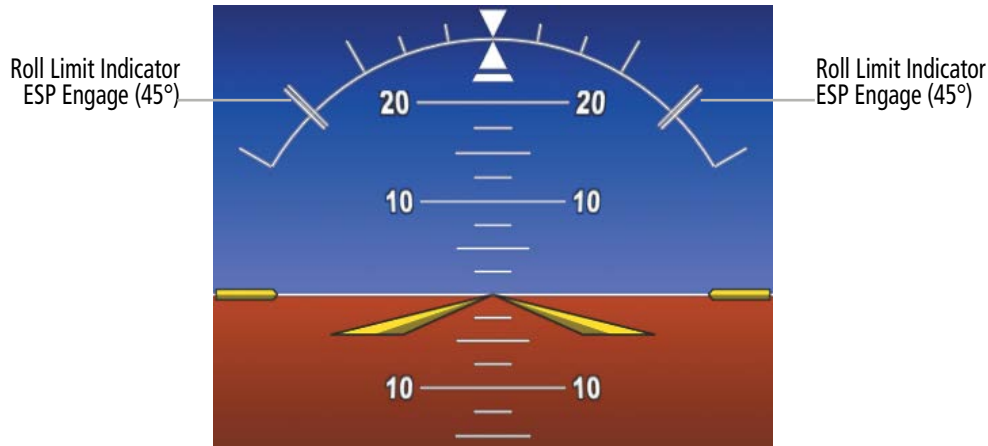


Figure 8-61 ESP Roll Engagement Indication (ESP NOT Engaged)

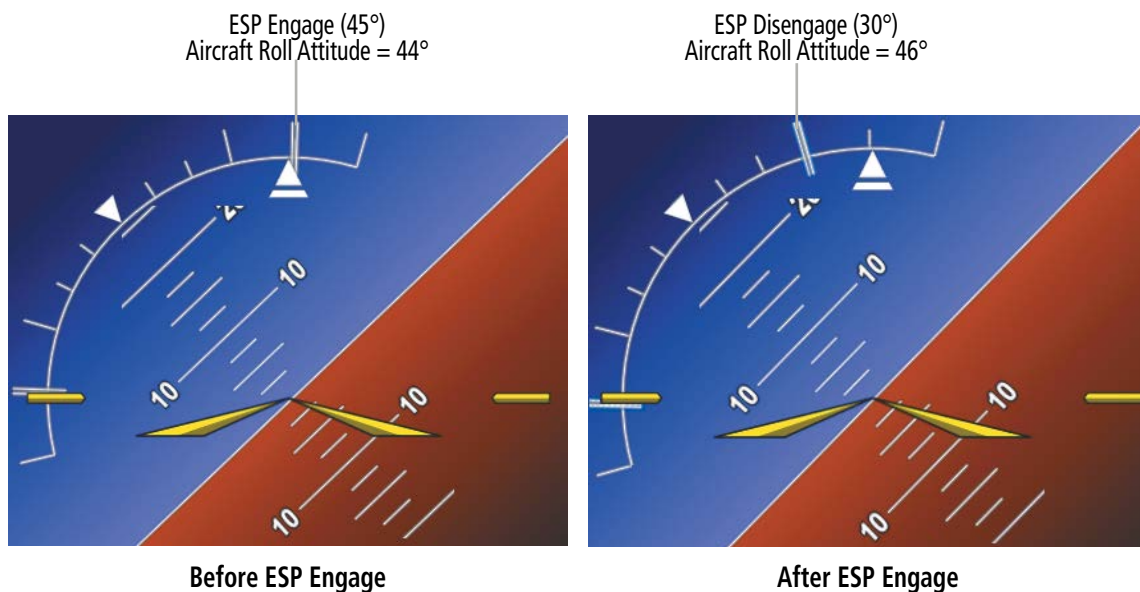


Figure 8-62 Roll Increasing to ESP Engagement

Once engaged, ESP force will be applied between 30° and 75°, as illustrated in the following figure. The force increases as roll attitude increases and decreases as roll attitude decreases. The applied force is intended to encourage pilot input that returns the airplane to a more normal roll attitude. As roll attitude decreases, ESP will disengage at 30°.

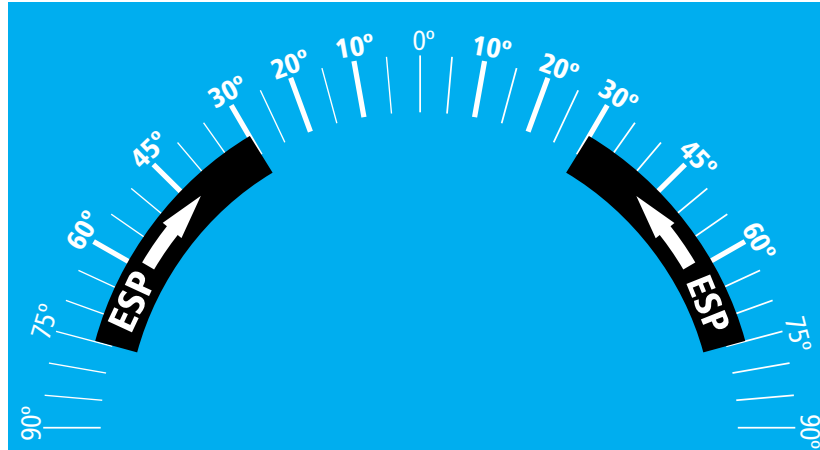


Figure 8-63 ESP Roll Operating Range When Engaged
(Force Increases as Roll Increases & Decreases as Roll Decreases)

ESP is automatically disengaged if the aircraft reaches the autopilot roll engagement attitude limit of 75°.

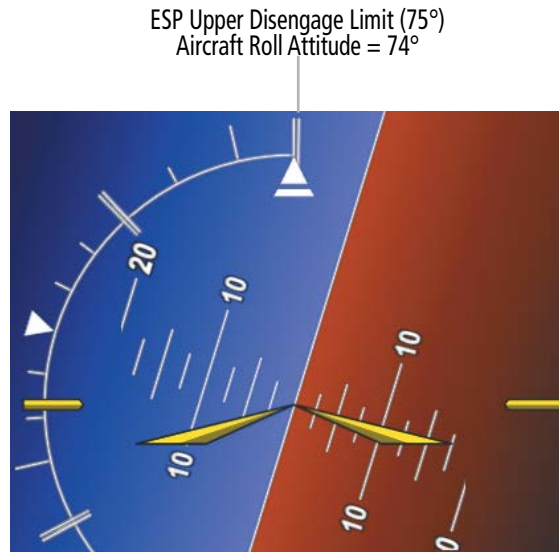


Figure 8-64 Roll Attitude Autopilot Engagement Limit (ESP Engaged)

PITCH ENGAGEMENT

ESP engages at 18° nose-up and nose-down. Once ESP is engaged, it will apply increasing opposing force between 18° and 23° nose-up and nose-down, as indicated in the following figure. Maximum opposing force is applied between 23° and 50° nose-up and nose-down. ESP disengages when 50° is exceeded in a nose-up or nose-down attitude.

With ESP engaged, and the aircraft in either a nose-up or nose-down condition, opposing force steadily decreases from 23° to 13° as aircraft pitch moves toward zero degrees. ESP disengages at 13° nose-up and nose-down.

The opposing force increases or decreases depending on the pitch angle and the direction of pitch travel. This force is intended to encourage movement in the pitch axis in the direction of the normal pitch attitude range for the aircraft.

There are no indications marking the pitch ESP engage and disengage limits in these nose-up/nose-down conditions.

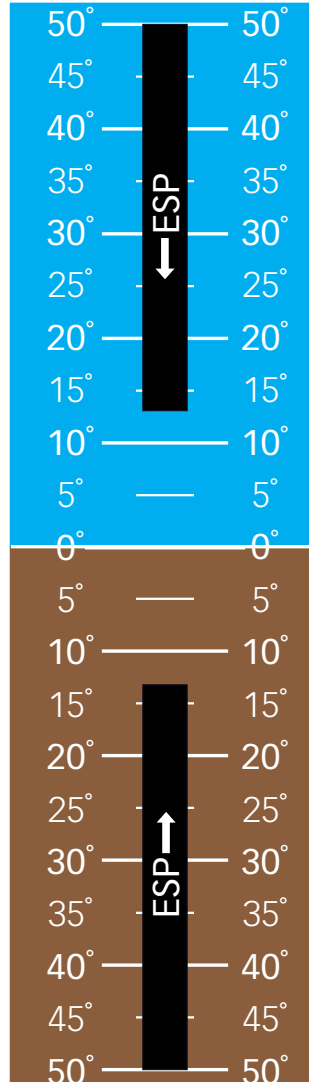


Figure 8-65 ESP Pitch Operating Range When Engaged
(Force Increases as Pitch Increases & Decreases as Pitch Decreases)

HIGH AIRSPEED PROTECTION

Exceeding V_{ne} will result in ESP applying force to raise the nose of the aircraft. When the high airspeed condition is remedied, ESP force is no longer applied.

8.10 ELECTRONIC CHECKLISTS



NOTE: The optional checklists presented here are for example only and may differ from checklists available for the DA40NG. The information described in this section is not intended to replace the checklist information described in the current pertinent flight manual or the Pilot Safety and Warning Supplements document.



NOTE: Garmin is not responsible for the content of checklists. Checklists are created by the aircraft manufacturer. Modifications or updates to the checklists are coordinated through the aircraft manufacturer. The user cannot edit these checklists.

The MFD is able to display optional electronic checklists which allow a pilot to quickly find the proper procedure on the ground and during each phase of flight. The system accesses the checklists from an SD card inserted into the bezel slot. If the SD card contains an invalid checklist file or no checklist, the message displayed on the power initialization page is 'Checklist File: Invalid' or 'Checklist File: N/A' (not available) and the **Checklist** Softkey is subdued.

Accessing and navigating checklists:

- 1) From any page on the MFD (except the EIS Pages), press the **Checklist** Softkey or turn the large **FMS** Knob to select the Checklist Page.
- 2) Turn the large **FMS** Knob to select the 'Group' field.
- 3) Turn the small **FMS** Knob to select the desired procedure and press the **ENT** Key.
- 4) Turn the large **FMS** Knob to select the 'Checklist' field.
- 5) Turn the **FMS** Knob to select the desired checklist and press the **ENT** Key. The selected checklist item is indicated with white text surrounded by a white box.
- 6) Press the **ENT** Key or **Check** Softkey to check the selected checklist item. The line item turns green and a checkmark is placed in the associated box. The next line item is automatically selected for checking.
 Either **FMS** Knob can be used to scroll through the checklist and select the desired checklist item.
 Press the **CLR** Key or **Uncheck** Softkey to remove a check mark from an item.
- 7) When all checklist items have been checked, '*Checklist Finished*' is displayed in green text at the bottom left of the checklist window. If all items in the checklist have not be checked, '*Checklist Not Finished*' will be displayed in yellow text.
- 8) Press the **ENT** Key. 'Go To Next Checklist?' will be highlighted by the cursor.
- 9) Press the **ENT** Key to advance to the next checklist.
- 10) Press the **Exit** Softkey to exit the Checklist Page and return to the page last viewed.

Checklist
Before Start

☐ Parking Brake Verify Set
☐ Wheel Chocks As Required
☐ Cabin Door Closed
☐ Passenger Briefing Complete
☐ Seats / Belts / Harnesses / Adjust / Secure
Pedals
☐ Cockpit Side Windows Closed / Latched
☐ Exterior Lights As Required
☐ Engine Instruments Check
☐ Fuel Quantity / Balance Check

Go to Next Checklist?

Figure 8-66 'Before Start' Checklist

Accessing emergency procedures:

- 1) From any page on the MFD (except the EIS Pages), press the **Checklist** Softkey or turn the large **FMS** Knob to select the Checklist Page.
- 2) Press the **EMER** Softkey.
- 3) Turn the **FMS** Knob to select the desired emergency checklist and press the **ENT** Key.
- 4) Press the **ENT** Key or **Check** Softkey to check the selected emergency checklist item. The line item turns green and a checkmark is placed in the box next to it. The next line item is automatically highlighted for checking. Either **FMS** Knob can be used to scroll through the checklist and select the desired checklist item. Press the **CLR** Key or **Uncheck** Softkey to remove a check mark from an item.
- 5) When all checklist items have been checked, '*Checklist Finished*' is displayed in green text at the bottom left of the checklist window. If all items in the checklist have not be checked, '*Checklist Not Finished*' will be displayed in yellow text.
- 6) Press the **ENT** Key. 'Go To Next Checklist?' will be highlighted by the cursor.
- 7) Press the **ENT** Key to advance to the next checklist.
- 8) Press the **Return** Softkey to return to the previous checklist.
- 9) Press the **Exit** Softkey to exit the Checklist Page and return to the page last viewed.

8.11 DATABASE MANAGEMENT

- 

CAUTION: *Never disconnect power to the system when loading a database. Power interruption during the database loading process could result in maintenance being required to reboot the system.*
- 

NOTE: *The system responds to a terminal procedure based on data coded within that procedure in the Navigation Database. Differences in system operation may be observed among similar types of procedures due to differences in the Navigation Database coding specific to each procedure.*
- 

NOTE: *The pilot/operator must review and be familiar with Garmin’s database exclusion list as discussed in SAIB CE-14-04 to determine what data may be incomplete. The database exclusion list can be viewed at flygarmin.com by selecting ‘Database Exclusions List.’*
- 

NOTE: *If the pilot/operator wants or needs to adjust the database, contact Garmin Product Support.*
- 

NOTE: *Garmin requests the flight crew report any observed discrepancies related to database information. These discrepancies could come in the form of an incorrect procedure; incorrectly identified terrain, obstacles and fixes; or any other displayed item used for navigation or communication in the air or on the ground. Go to flygarmin.com and select ‘Aviation Data Error Report.’*

CYCLE NUMBER AND REVISION

Databases that may be available include FliteCharts, ChartView, IFR/VFR Charts, Checklist, Navigation, Basemap Land, Terrain, Obstacle, SafeTaxi, and Airport Directory Databases. Data is revised and expiration dates vary. Data is still viewable during a period that extends from the cycle expiration date to the disables date. After applying power to the system, the MFD displays the current status of the databases. As an example, see the following table for the various initialization page displays and the definition of each. The expiration date and disables date varies for each database.

Example Page Initialization Display Text	
	FliteCharts Data: N/A
	FliteCharts Data: Expires DD-MMM-YYYY
	FliteCharts Data: Disables DD-MMM-YYYY
	FliteCharts Data: Disabled

Table 8-4 Database Initialization Annunciations

White text, such as 'FliteCharts Data Expires' plus a date, indicates the chart database is current. Yellow text, such as 'Chart data is out of date!' or 'FliteCharts Data: Disabled', indicates charts are no longer viewable and have expired.

Database time critical information can also be found on the 'Aux - System Status' Page. The database Region, Cycle number, Effective, Expires, and Disables dates of the subscription appear in either blue or yellow text. Dates shown in white are current data. Dates shown in amber indicate the data is not within the current subscription period. Refer to Updating Garmin Databases in Appendix for instructions on revising databases.



NOTE: A subdued softkey label indicates the function is disabled.

Viewing database information:

- 1) Turn the large **FMS** Knob to select the 'Aux' Page Group.
- 2) Turn the small **FMS** Knob to select the 'Aux - System Status' Page.
- 3) Touch the softkey corresponding to the window (**LRU**, **ARFRM**, or **MFD1 DB**) for which the database information will be viewed. This will activate the cursor within that window.
- 4) Scroll to display the appropriate database information by turning the **FMS** Knob or pressing the **ENT** Key until the applicable database information is shown.

Or:

- 1) Turn the large **FMS** Knob to select the 'Aux' Page Group.
- 2) Turn the small **FMS** Knob to select the 'Aux - Databases' Page.
- 3) Push the **FMS** Knob to activate the flashing cursor.
- 4) Scroll to display the appropriate database information by turning the **FMS** Knob until the applicable database information is shown. Applicable database status is shown in the 'Status' Field.

Database cycle numbers are in a format such as YYTI or YYII, which are deciphered as follows:

YYTI

- » YY – Indicates the last two digits of the year (ex. 18 represents 2018)
- » T – Indicates the database type (ex. S is for SafeTaxi, D is for Airport Directory)
- » I – Indicates the numerical issue of the database for the year (ex. 5 is the fifth issue of the year)

YYII

- » YY – Indicates the last two digits of the year (ex. 18 represents 2018)
- » II – Indicates the numerical issue of the database for the year (ex. 05 is the fifth issue of the year)
- » Refer to Updating Garmin Databases in Appendix for instructions on revising databases.

SYSTEM OVERVIEW
FLIGHT INSTRUMENTS
EIS
AUDIO & CNS
FLIGHT MANAGEMENT
HAZARD AVOIDANCE
AFCS
ADDITIONAL FEATURES
APPENDICES
INDEX

Example Page Initialization Display Text	Database Cycle Number Format	Revision Cycle
 Navigation	YYII	28 days
 Basemap Land	YYMI	Not Applicable
 Terrain	YYTI	Not Applicable
 Obstacle	YYBI	56 days
 SafeTaxi	YYSI	56 days
 Airport Directory	YYDI	56 days
 FliteCharts	YYII	28 days
 ChartView	YYII	14 days
 IFR/VFR Charts	YYII	28 days

Table 8-5 Database Cycle Number and Revision

8.12 ABNORMAL OPERATION

SIRIUSXM DATALINK RECEIVER TROUBLESHOOTING

For troubleshooting purposes, check the LRU Information Box on the 'Aux - System Status' Page for GDL 69A SXM status, serial number, and software version number. If a failure has been detected in the GDL 69A SXM the status is marked with a red X.

Viewing the 'Aux - System Status' Page:

- 1) Turn the large **FMS** Knob to select the 'Aux' Page Group.
- 2) Turn the small **FMS** Knob to select the 'Aux - System Status' Page.
- 3) Press the **FMS** Knob to activate the flashing cursor in the 'LRU Information' Window.
- 4) Scroll to display the appropriate LRU information by turning the **FMS** Knob or pressing the **ENT** Key until the applicable database information is shown.

QUICK TROUBLESHOOTING

Some quick troubleshooting steps listed below can be performed to find the possible cause of a failure.

- » Ensure the installed Datalink Receiver or Iridium Transceiver has an active subscription or account
- » Perform a quick check of the circuit breakers to ensure that power is applied to the Datalink Receiver or Iridium Transceiver
- » Ensure that nothing is plugged into the MUSIC 1 or MUSIC 2 jacks because that would prevent SiriusXM radio from being heard
- » If a failure still exists, the following messages may provide insight as to the possible problem:

Message	Message Location	Description
CHECK ANTENNA	XM Information Page (MFD)	Datalink Receiver antenna error; service required
UPDATING	XM Information Page (MFD)	Datalink Receiver updating encryption code
NO SIGNAL	XM Information Page Weather Datalink Page (MFD)	Loss of signal; signal strength too low for receiver
LOADING	XM Radio Page (MFD)	Acquiring channel audio or information
OFF AIR	XM Radio Page (MFD)	Channel not in service
-----	XM Radio Page (MFD)	Missing channel information
WEATHER DATA LINK FAILED	Weather Datalink Page (MFD)	No communication from Datalink Receiver within last 5 minutes
ACTIVATION REQUIRED	XM Information Page (MFD)	SiriusXM subscription is not activated
DETECTING ACTIVATION	Weather Datalink Page (MFD)	SiriusXM subscription is activating.
WAITING FOR DATA...	Weather Datalink Page (MFD)	SiriusXM subscription confirmed downloading weather data.

Table 8-6 GDL 69A SXM Datalink Receiver Messages

SYSTEM
OVERVIEW

FLIGHT
INSTRUMENTS

EIS

AUDIO & CNS

FLIGHT
MANAGEMENT

HAZARD
AVOIDANCE

AFCS

ADDITIONAL
FEATURES

APPENDICES

INDEX

Blank Page

ANNUNCIATIONS AND ALERTS



NOTE: The current version of the pertinent flight manual supersedes information found in this document. Refer to the current version of the pertinent flight manual for recommended pilot actions.

CREW ALERTING SYSTEM (CAS)

CAS messages are displayed in the 'CAS' Window on the PFD. Up to 12 messages can be displayed before CAS scrolling becomes available. Press the **CAS** Softkey and use the **CAS Up** and **CAS Dn** Softkeys to scroll through the CAS messages. Text color is based on priority level. Higher priority messages are displayed towards the top of the window. Lower priority messages are displayed towards the bottom of the window.



Figure A-1 CAS Scrolling


CAS MESSAGE PRIORITIZATION



NOTE: Information on CAS messages in this pilot's guide is always superseded by the current version of the pertinent flight manual.

CAS messages are grouped by criticality (warning, caution, advisory) and sorted by order of appearance (most recent messages on top). The color of the message is based on its urgency and on required action.

- » **Warning** (red) – Immediate crew awareness and action required. When a new warning CAS message appears in the CAS Window, it flashes (inversely red on white) and is accompanied by a continuous aural tone. Pressing the 'Warning' Softkey acknowledges the warning alert and stops the aural tone, if applicable.
- » **Caution** (amber) – Immediate crew awareness and possible future corrective action required. When a new caution CAS message appears in the CAS Window, it flashes (inversely black on amber) and is accompanied by an aural tone. Pressing the '**Caution**' Softkey acknowledges all amber messages and extinguishes the softkey. Once acknowledged, caution messages are displayed until the issue is corrected.
- » **Advisory** (white) – Crew awareness required and subsequent action may be required. When a new advisory message appears in the CAS Window, it flashes (inversely black on white) in conjunction with the white '**Message**' Softkey. Pressing the white '**Message**' Softkey acknowledges the presence of the advisory alert, change the '**Message**' Softkey to '**Alerts**' and extinguishes the Softkey annunciation flashing.

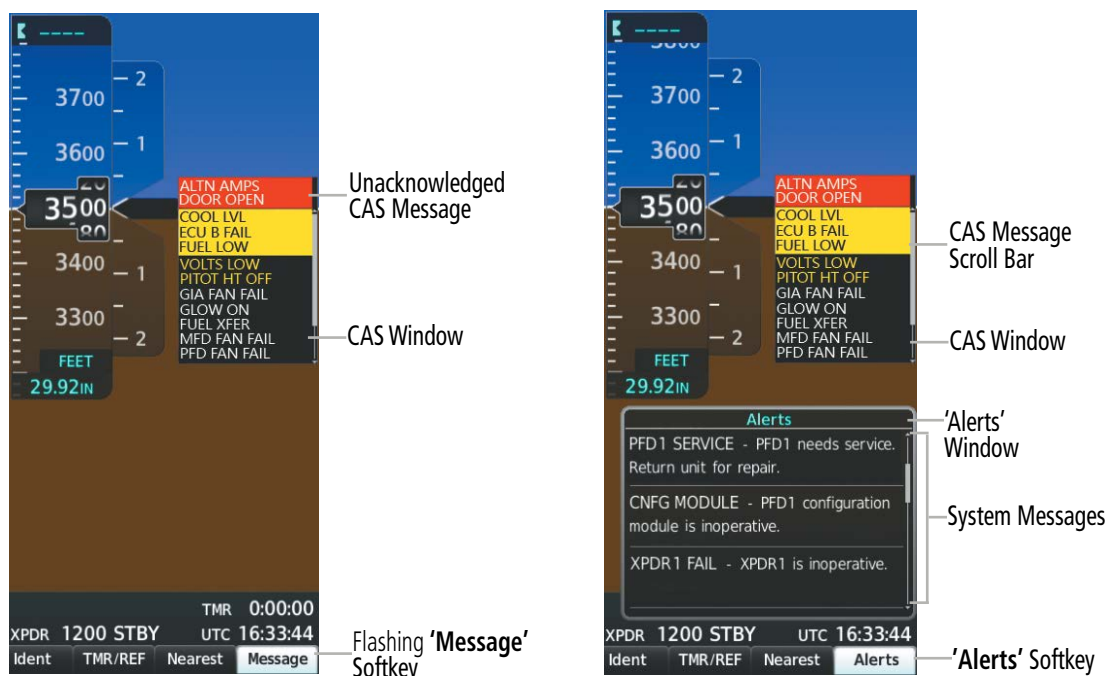

Messages System before softkey acknowledgement

Message System after softkey acknowledgement

Figure A-2 CAS Display and Acknowledgement



Figure A-3 System Messages Softkey Annunciations

DISPLAY INHIBITS

Inhibits prevent certain CAS messages from being displayed during the following conditions:

If two alert levels of the same message are active simultaneously (e.g., L FUEL QTY warning and L FUEL QTY caution) only the higher alert level is displayed.

If a GEA or GIA fails, all CAS messages depending on sensors associated with that LRU are automatically inhibited. Inhibits cannot be activated by invalid sensor data.

CAS MESSAGES

WARNING MESSAGES

See the current version of the pertinent flight manual for recommended pilot actions. Warning messages are accompanied by a continuous aural tone.

Message	Description
ALTN AMPS	Engine alternator output is > 70 amps.
ALTN FAIL	Engine alternator has failed.
DOOR OPEN	Front or rear door is not closed.
ENG TEMP	Engine coolant temp is >105 deg. C.
FUEL PRES	Engine fuel pressure is low.

Message	Description
GBOX TEMP	Engine gearbox temp is > 120 deg. C.
L FUEL TEMP	Left fuel temp is greater than 60 deg. C.
OIL PRES	Engine oil pressure is less than 0.9 bar.
OIL TEMP	Engine oil temp is greater than 140 deg. C.
R FUEL TEMP	Right fuel temp is greater than 60 deg. C.
STARTER	Engine starter is engaged.

CAUTION MESSAGES

See the current version of the pertinent flight manual for recommended pilot actions. Caution messages are accompanied by a single aural tone.

Message	Description
COOL LVL	Engine coolant level is low.
ECU A FAIL	Engine ECU A has failed.
ECU B FAIL	Engine ECU B has failed.
FUEL LOW	Left fuel quantity is low
VOLTS LOW	Bus voltage is less than 25 volts.
PITOT FAIL	Pitot heat has failed.
PITOT HT OFF	Pitot heat is off.

ADVISORY MESSAGES

See the current version of the pertinent flight manual for recommended pilot actions.

Message	Description
GIA FAN FAIL	The cooling fan for the GIA's is inoperative
GLOW ON	Engine glow plug active.
FUEL XFER	Fuel transfer in progress
MFD FAN FAIL	The cooling fan for the MFD is inoperative
PFD FAN FAIL	The cooling fan for the PFD is inoperative

AUDIO ALERTING SYSTEM TEST

The system issues audio alert tones when specific system conditions are met. Should the #1 GIA 64W fail, audio and voice alerts are not generated. The annunciation tone may be tested from the AUX - System Status Page.

Testing the system annunciation tone:

- 1) Use the **FMS** Knob to select the AUX - System Status Page.
 - 2) Select the **Ann Test** Softkey.
- Or:
- 1) Press the **MENU** Key.
 - 2) Highlight 'Enable Annunciator Test Mode' and press the **ENT** Key.

SYSTEM MESSAGES ANNUNCIATIONS



NOTE: Upon power-on, certain windows remain invalid as system equipment begins to initialize. All windows should be operational within one minute of power-on. If any window continues to remain flagged, the system should be serviced by a Garmin-authorized repair facility.

System Messages convey messages to the flight crew regarding problems with the system. Typically, a large red or amber 'X' appears in a window when a related LRU fails or detects invalid data.

When a new message is issued, the **Message** Softkey flashes to alert the flight crew. It continues to flash until acknowledged by pressing the softkey. Active messages are displayed in the 'Alerts' Window in white text. Messages that have become inactive change to gray text. The **Message** Softkey flashes again if the state of a displayed message changes or a new message is displayed. Inactive messages can be removed from the 'Alerts' Window by pressing the **Alerts** Softkey.

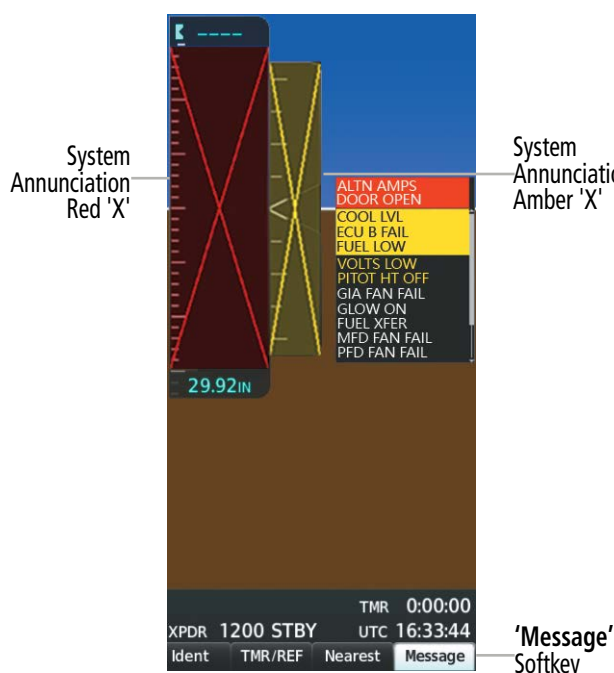


Figure A-4 System Messages - Message Softkey
(Prior to softkey being pressed)

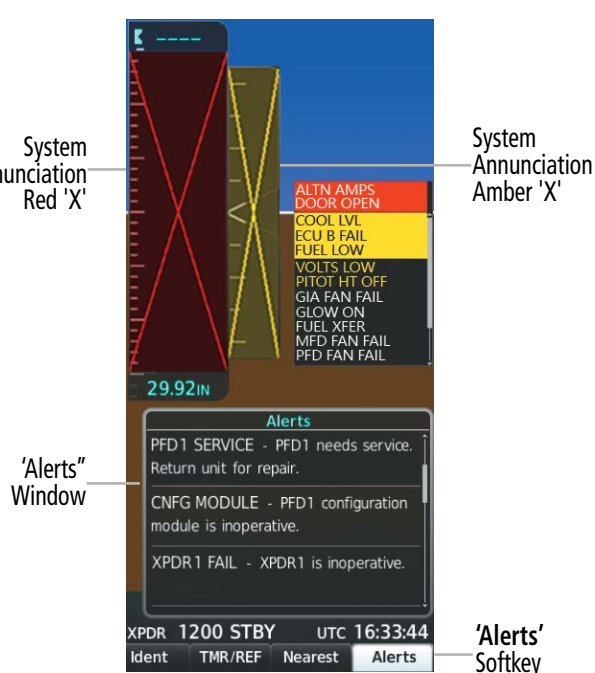


Figure A-5 System Messages - Alerts Softkey
(After softkey being pressed)

SYSTEM MESSAGES



NOTE: This Section provides information regarding system message advisories that may be displayed by the system. Knowledge of the aircraft, systems, flight conditions, and other existing operational priorities must be considered when responding to a message. Always use sound pilot judgment. The current version of the pertinent flight manual takes precedence over any conflicting guidance found in this section.

This table lists various system messages. Certain messages are issued due to an LRU or LRU function failure. Such messages are normally accompanied by a corresponding red 'X' annunciation.

Message	Comments
ABORT APR – Loss of GPS navigation. Abort approach.	Abort approach due to loss of GPS navigation.
ADC1 ALT EC – ADC1 altitude error correction is unavailable	GDC1 is reporting the altitude error correction is unavailable.
ADC1 AS EC – ADC1 airspeed error correction is unavailable.	GDC1 is reporting the airspeed error correction is unavailable.
ADC1 SERVICE – ADC1 needs service. Return unit for repair.	The GDC1 should be serviced.
AHRS1 CAL – AHRS1 calibration version error. Svc req'd.	The #1 AHRS calibration version error. The system should be serviced.
AHRS1 CONFIG – AHRS1 config error. Config service req'd.	AHRS configuration settings do not match those of backup configuration memory. The system should be serviced.
AHRS1 GPS – AHRS1 using backup GPS source.	The #1 AHRS is using the backup GPS path. Primary GPS path has failed. The system should be serviced when possible.
AHRS1 GPS – AHRS1 not receiving any GPS information.	The #1 AHRS is not receiving any or any useful GPS information. Check the current version of the pertinent flight manual limitations. The system should be serviced.
AHRS1 GPS – AHRS1 not receiving backup GPS information.	The #1 AHRS is not receiving backup GPS information. The system should be serviced.
AHRS1 GPS – AHRS1 operating exclusively in no-GPS mode.	The #1 AHRS is operating exclusively in no-GPS mode. The system should be serviced.
AHRS1 SERVICE – AHRS1 Magnetic-field model needs update.	The #1 AHRS earth magnetic field model is out of date. Update magnetic field model when practical.
AHRS1 TAS – AHRS1 not receiving airspeed.	The #1 AHRS is not receiving true airspeed from the air data computer. The AHRS relies on GPS information to augment the lack of airspeed. The system should be serviced.
APR DWNGRADE – Approach downgraded.	Use LNAV minima when approach is downgraded.
ARSPC AHEAD – Airspace ahead less than 10 minutes.	Special use airspace is ahead of aircraft. The aircraft will penetrate the airspace within 10 minutes.
ARSPC NEAR – Airspace near – less than 2 nm.	Special use airspace is within 2 nm of the aircraft position.
ARSPC NEAR – Airspace near and ahead.	Special use airspace is near and ahead of the aircraft position.

Message	Comments
APR INACTV – Approach is not active.	The system notifies the pilot the loaded approach is not active. Activate approach when required.
AUDIO MANIFEST – Audio software mismatch, communication halted.	The GMA has incorrect software installed. The system should be serviced.
CHECK CRS – Database course for LOC2 / [LOC ID] is [CRS]°.	Selected course for LOC2 differs from published localizer course by more than 10 degrees.
CNFG MODULE – PFD1 configuration module is inoperative.	The PFD1 configuration module backup memory has failed. The system should be serviced.
COM1 CONFIG – COM1 config error. Config service req'd.	The COM1 configuration settings do not match backup configuration memory. The system should be serviced
COM #[1, 2] INOP - CAL – Check COM calibration.	COM 1 and/or COM 2 calibration version error. Check COM calibration.
COM #[1, 2] INOP - CRNT – Check COM current.	COM 1 and/or COM 2 current is low. Check COM current.
COM #[1, 2] INOP - INTRL – Com internal fault.	COM 1 and/or COM 2 has an internal fault.
COM #[1, 2] REDUCED TX POWER – COM synthesizer lock fault.	COM 1 and/or COM 2 has a reduced transmission power.
COM #[1, 2] INOP - SYNTH – COM synthesizer lock fault.	The COM 1 and/or COM 2 has a synthesizer lock fault.
COM1 PTT – COM1 push-to-talk key is stuck.	The COM1 external push-to-talk switch is stuck in the enable (or “pressed”) position. Press the PTT switch again to cycle its operation. If the problem persists, the system should be serviced.
COM1 RMT XFR – COM1 remote transfer key is stuck.	The COM1 transfer switch is stuck in the enabled (or “pressed”) position. Press the transfer switch again to cycle its operation. If the problem persists, the system should be serviced.
COM1 SERVICE – COM1 needs service. Return unit for repair.	The system has detected a failure in COM1. COM1 may still be usable. The system should be serviced when possible.
COM1 TEMP – COM1 over temp. Reducing transmitter power.	The system has detected an over temperature condition in COM1. The transmitter operates at reduced power. If the problem persists, the system should be serviced.
COM2 CONFIG – COM2 config error. Config service req'd.	The COM2 configuration settings do not match backup configuration memory. The system should be serviced
COM2 PTT – COM2 push-to-talk key is stuck.	The COM2 external push-to-talk switch is stuck in the enable (or “pressed”) position. Press the PTT switch again to cycle its operation. If the problem persists, the system should be serviced.
COM2 RMT XFR – COM2 remote transfer key is stuck.	The COM2 transfer switch is stuck in the enabled (or “pressed”) position. Press the transfer switch again to cycle its operation. If the problem persists, the system should be serviced.
COM2 SERVICE – COM2 needs service. Return unit for repair.	The system has detected a failure in COM2. COM2 may still be usable. The system should be serviced when possible.
COM2 TEMP – COM2 over temp. Reducing transmitter power.	The system has detected an over temperature condition in COM2. The transmitter operates at reduced power. If the problem persists, the system should be serviced.

Message	Comments
COPILOT RADIOS MUTED – Copilot radios are muted.	The copilot radios are set on mute.
DATA LOST – Pilot stored data was lost. Recheck settings.	The pilot profile data was lost. System reverts to default pilot profile and settings. The pilot may reconfigure the MFD & PFD with preferred settings, if desired.
DB CHANGE – Database changed. Verify user modified procedures.	This occurs when a stored flight plan contains procedures that have been manually edited. This alert is issued only after an navigation database update. Verify the user-modified procedures in stored flight plans are correct and up to date.
DB CHANGE – Database changed. Verify stored airways.	This occurs when a stored flight plan contains an airway that is no longer consistent with the navigation database. This alert is issued only after an navigation database update. Verify use of airways in stored flight plans and reload airways as needed.
DB MISMATCH – Navigation database mismatch. Xtalk is off.	The PFD and MFD have different navigation database versions or types installed. Crossfill is off. Check the Aux-System Status Page to determine versions or regions. Also, check the Aux-System Status Page for a database synchronization function not completed. After synchronization is complete, power must be turned off, then on.
DB MISMATCH – Obstacle database mismatch.	The PFD and MFD have different obstacle database versions or types installed. Check the Aux-System Status Page to determine versions or regions. Also, check the Aux-System Status Page for a database synchronization function not completed. After synchronization is complete, power must be turned off, then on.
DB MISMATCH – Terrain database mismatch.	The PFD and MFD have different terrain database versions or types installed. Check the Aux-System Status Page to determine versions or regions. Also, check the Aux-System Status Page for a database synchronization function not completed. After synchronization is complete, power must be turned off, then on.
DIG GMA1 MANIFEST – DIG GMA 1 software mismatch, communication halted.	The digital audio controller has incorrect software installed. The system should be serviced.
DISABLE GP TO ARM CLIMB – Press APPR button to enable VNAV track change.	Disable AFCS APPR mode to enable VNAV
DISABLE GS TO ARM CLIMB – Press APPR button to enable VNAV track change.	Disable AFCS APPR mode to enable VNAV
DME CHECK RANGE – DME range disagreement. Check position sensors.	A failure or disagreement has been detected in a DME receiver. Check position sensors.
ESP CONFIG – ESP config error. ESP Unlock card required.	ESP is not configured properly. ESP unlock card required.
ESP DEGRADE – ESP IAS mode is inoperative.	IAS mode of ESP is inoperative. The system should be serviced.
ESP FAIL – ESP is inoperative.	The ESP function has failed and is inoperative. The system should be serviced.
ESP OFF – ESP selected off.	Electronic Stability and Protection has been disabled on the 'Avionics Settings' Screen.
FAILED PATH – A data path has failed.	A data path connected to the GDU or the GIA 64W has failed.
FPL TRUNC – Flight plan has been truncated.	This occurs when a newly installed navigation database eliminates an obsolete approach or arrival used by a stored flight plan. The obsolete procedure is removed from the flight plan. Update flight plan with current arrival or approach.

Message	Comments
FPL WPT LOCK – Flight plan waypoint is locked.	Upon power-on, the system detects that a stored flight plan waypoint is locked. This occurs when a navigation database update eliminates an obsolete waypoint. The flight plan cannot find the specified waypoint and flags this message. This can also occur with user waypoints in a flight plan that is deleted. Remove the waypoint from the flight plan if it no longer exists in any database, OR update the waypoint name/identifier to reflect the new information.
G/S1 FAIL – G/S1 is inoperative.	A failure has been detected in glideslope receiver 1. The system should be serviced.
G/S1 SERVICE – G/S1 needs service. Return unit for repair.	A failure has been detected in glideslope receiver 1. The receiver may still be available. The system should be serviced when possible.
G/S2 FAIL – G/S2 is inoperative.	A failure has been detected in glideslope receiver 2. The system should be serviced.
G/S2 SERVICE – G/S2 needs service. Return unit for repair.	A failure has been detected in glideslope receiver 2. The receiver may still be available. The system should be serviced when possible.
GDC1 MANIFEST – GDC1 software mismatch, communication halted.	The AHRS has incorrect software installed. The system should be serviced.
GDL69 CONFIG – GDL 69 config error. Config service req'd.	GDL 69/69A SXM configuration settings do not match those of backup configuration memory. The system should be serviced.
GDL69 FAIL – GDL 69 has failed.	A failure has been detected in the GDL 69/69A or GDL 69/69A SXM. The receiver is unavailable. The system should be serviced.
GDL69 MANIFEST – GDL software mismatch, communication halted.	The GDL 69/69A SXM has incorrect software installed. The system should be serviced.
GEA1 CONFIG – GEA1 config error. Config service req'd.	The GEA1 configuration settings do not match those of backup configuration memory. The system should be serviced.
GEA1 MANIFEST – GEA1 software mismatch, communication halted.	The #1 GEA has incorrect software installed. The system should be serviced.
GEO LIMITS – AHRS1 too far North/South, no magnetic compass.	The aircraft is outside geographical limits for approved AHRS operation. Heading is flagged as invalid.
GFC MANIFEST – GFC software mismatch, communication halted.	Incorrect servo software is installed, or gain settings are incorrect.
GIA1 CONFIG – GIA1 audio config error. Config service req'd.	The GIA1 have an error in the audio configuration. The system should be serviced.
GIA1 CONFIG – GIA1 config error. Config service req'd.	The GIA1 configuration settings do not match backup configuration memory. The system should be serviced.
GIA1 COOLING – GIA1 temperature too low.	The GIA1 and/or GIA2 temperature is too low to operate correctly. Allow units to warm up to operating temperature.
GIA1 COOLING – GIA1 over temperature.	The GIA1 temperature is too high. If problem persists, the system should be serviced.
GIA1 MANIFEST – GIA1 software mismatch, communication halted.	The GIA1 1 has incorrect software installed. The system should be serviced.
GIA1 SERVICE – GIA1 needs service. Return the unit for repair.	The GIA1 self-test has detected a problem in the unit. The system should be serviced.
GIA2 CONFIG – GIA2 audio config error. Config service req'd.	The GIA2 have an error in the audio configuration. The system should be serviced.

Message	Comments
GIA2 CONFIG – GIA2 config error. Config service req'd.	The GIA2 configuration settings do not match backup configuration memory. The system should be serviced.
GIA2 COOLING – GIA2 over temperature.	The GIA2 temperature is too high. If problem persists, the system should be serviced.
GIA2 COOLING – GIA2 temperature too low.	The GIA2 temperature is too low to operate correctly. Allow units to warm up to operating temperature.
GIA2 MANIFEST – GIA2 software mismatch, communication halted.	The GIA 2 has incorrect software installed. The system should be serviced.
GIA2 SERVICE – GIA2 needs service. Return the unit for repair.	The GIA2 self-test has detected a problem in the unit. The system should be serviced.
GMA1 AUX MANIFEST – GMA 1 AUX software mismatch, communication halted.	The digital audio controller has incorrect software installed. The system should be serviced.
GMA1 CONFIG – GMA1 config error. Config service req'd.	The audio panel configuration settings do not match backup configuration memory. The system should be serviced.
GMA1 FAIL – GMA1 is inoperative.	The audio panel self-test has detected a failure. The audio panel is unavailable. The system should be serviced.
GMA1 MANIFEST – GMA1 software mismatch, communication halted.	The audio panel has incorrect software installed. The system should be serviced.
GMA1 SERVICE – GMA1 needs service. Return unit for repair.	The audio panel self-test has detected a problem in the unit. Certain audio functions may still be available, and the audio panel may still be usable. The system should be serviced when possible.
GMU1 MANIFEST – GMU1 software mismatch, communication halted.	The GMU has incorrect software installed. The system should be serviced.
GPS NAV LOST – Loss of GPS navigation. Insufficient satellites.	Loss of GPS navigation due to insufficient satellites.
GPS NAV LOST – Loss of GPS navigation. Position error.	Loss of GPS navigation due to position error.
GPS NAV LOST – Loss of GPS navigation. GPS fail.	Loss of GPS navigation due to GPS failure.
GPS1 SERVICE – GPS1 needs service. Return unit for repair.	A failure has been detected in the GPS1 and/or GPS2 receiver. The receiver may still be available. The system should be serviced.
GPS2 SERVICE – GPS2 needs service. Return unit for repair.	
GRS1 MANIFEST – GRS1 software mismatch, communication halted.	The AHRS has incorrect software installed. The system should be serviced.
GTS CONFIG – GTS config error. Config service req'd.	GTS 800 configuration settings do not match those of the GDU configuration. The system should be serviced.
GTS MANIFEST – GTS software mismatch, communication halted.	The GTS has incorrect software installed. The system should be serviced.
GTX1 MANIFEST – GTX1 software mismatch, communication halted.	The transponder has incorrect software installed. The system should be serviced.
HDG FAULT – AHRS1 magnetometer fault has occurred.	A fault has occurred in the #1 GMU. Heading is flagged as invalid. The AHRS uses GPS for backup mode operation. The system should be serviced.

Message	Comments
HW MISMATCH – GIA hardware mismatch. GIA1 communication halted.	A GIA mismatch has been detected, where only one is SBAS capable.
HW MISMATCH – GIA hardware mismatch. GIA2 communication halted.	A GIA mismatch has been detected, where only one is SBAS capable.
INSIDE ARSPC – Inside airspace.	The aircraft is inside the airspace.
INVALID ADM – Invalid ADM: ATN communication halted.	Data link avionics were not configured correctly and therefore will not be able to communicate with the ground network.
LOCKED FPL – Cannot navigate locked flight plan.	This occurs when the pilot attempts to activate a stored flight plan that contains locked waypoint. Remove locked waypoint from flight plan. Update flight plan with current waypoint.
LOI – GPS integrity lost. Crosscheck with other NAVS.	GPS integrity is insufficient for the current phase of flight.
LRG MAG VAR – Verify all course angles.	The GDU's internal model cannot determine the exact magnetic variance for geographic locations near the magnetic poles. Displayed magnetic course angles may differ from the actual magnetic heading by more than 2°.
MANIFEST – MFD1 software mismatch, communication halted.	The PFD and/or MFD has incorrect software installed. The system should be serviced.
MANIFEST – PFD1 software mismatch, communication halted.	
MFD SOFTWARE – MFD mismatch, communication halted.	The specified GDU has different software versions installed. The system should be serviced.
MFD TERRAIN DSP – MFD Terrain awareness display unavailable.	One of the terrain or obstacle databases required for TAWS in the specified GDU is missing or invalid.
MFD1 BACKLIGHT CALIBRATION – MFD1 calibration. Return for repair.	The specified GDU's backlight calibration cannot be found or is invalid. The system should be serviced.
MFD1 CONFIG – MFD1 config error. Config service req'd.	The MFD configuration settings do not match backup configuration memory. The system should be serviced.
MFD1 COOLING – MFD1 has poor cooling. Reducing power usage.	The MFD is overheating and is reducing power consumption by dimming the display. If problem persists, the system should be serviced.
MFD1 DB ERR – MFD1 obstacle database error exists.	The MFD detected a failure in the obstacle database. Ensure the data card is properly inserted. Replace data card. If problem persists, the system should be serviced.
MFD1 DB ERR – MFD1 obstacle database missing.	The obstacle database is present on another LRU, but is missing on the specified LRU.
MFD1 DB ERR – MFD1 terrain database error exists.	The MFD detected a failure in the terrain database. Ensure the terrain card is properly inserted in display. Replace terrain card. If problem persists, the system should be serviced.
MFD1 DB ERR – MFD1 terrain database missing.	The terrain database is present on another LRU, but is missing on the specified LRU.
MFD1 SERVICE – MFD1 needs service. Return unit for repair.	The MFD self-test has detected a problem. The system should be serviced.
MFD1 KEYSTK – MFD1 [key name] is stuck.	A key is stuck on the MFD bezel. Attempt to free the stuck key by pressing it several times. The system should be serviced if the problem persists.

Message	Comments
MFD1 VOLTAGE – MFD1 has low voltage. Reducing power usage	The MFD voltage is low. The system should be serviced.
NAV1 MANIFEST – NAV1 software mismatch, communication halted.	NAV1 software mismatch. The system should be serviced.
NAV1 RMT XFR – NAV1 remote transfer key is stuck.	The remote NAV1 transfer switch is stuck in the enabled (or “pressed”) state. Press the transfer switch again to cycle its operation. If the problem persists, the system should be serviced.
NAV1 SERVICE – NAV1 needs service. Return unit for repair.	A failure has been detected in the NAV1 receiver. The receiver may still be available. The system should be serviced.
NAV2 MANIFEST – NAV2 software mismatch, communication halted.	NAV2 software mismatch. The system should be serviced.
NAV2 RMT XFR – NAV2 remote transfer key is stuck.	The remote NAV2 transfer switch is stuck in the enabled (or “pressed”) state. Press the transfer switch again to cycle its operation. If the problem persists, the system should be serviced.
NAV2 SERVICE – NAV2 needs service. Return unit for repair.	A failure has been detected in the NAV2 receiver. The receiver may still be available. The system should be serviced.
NON-MAGNETIC UNITS – Non-magnetic NAV ANGLE display units are active.	Navigation angle is not set to MAGNETIC at power-on.
NON WGS84 WPT – Do not use GPS for navigation to [xxxx]	The position of the selected waypoint [xxxx] is not calculated based on the WGS84 map reference datum and may be positioned in error as displayed. Do not use GPS to navigate to the selected non-WGS84 waypoint..
PFD1 BACKLIGHT CALIBRATION – PFD1 backlight calibration lost. Return for repair.	The PFD1 backlight calibration cannot be found or is invalid. The system should be serviced.
PFD1 CONFIG – PFD1 config error. Config service req’d.	The PFD configuration settings do not match backup configuration memory. The system should be serviced.
PFD1 COOLING – PFD1 has poor cooling. Reducing power usage.	The PFD is overheating and is reducing power consumption by dimming the display. If problem persists, the system should be serviced.
PFD1 DB ERR – PFD1 obstacle database missing.	The obstacle database is present on another LRU, but is missing on the specified LRU.
PFD1 DB ERR – PFD1 terrain database error exists.	The PFD detected a failure in the terrain database. Ensure the terrain card is properly inserted in display. Replace terrain card. If problem persists, the system should be serviced.
PFD1 DB ERR – PFD1 terrain database missing.	The terrain database is present on another LRU, but is missing on the specified LRU.
PFD1 KEYSTK – PFD1 [key name] is stuck.	A key is stuck on the PFD bezel. Attempt to free the stuck key by pressing it several times. The system should be serviced if the problem persists.
[PFD1 OR MFD1] CARD 1 REM – Card 1 was removed. Reinsert card.	The SD card was removed from the top card slot of the specified PFD or MFD. The SD card needs to be reinserted.
[PFD1 OR MFD1] CARD 2 REM – Card 2 was removed. Reinsert card.	The SD card was removed from the bottom card slot of the specified PFD or MFD. The SD card needs to be reinserted.
[PFD1 OR MFD1] CARD 1 ERR – Card 1 is invalid.	The SD card in the top card slot of the specified PFD or MFD contains invalid data.

Message	Comments
[PFD1 OR MFD1] CARD 2 ERR – Card 2 is invalid.	The SD card in the bottom card slot of the specified PFD or MFD contains invalid data.
PFD1 VOLTAGE – PFD1 has low voltage. Reducing power usage	The PFD1 voltage is low. The system should be serviced.
PFD1 KEYSTK – PFD2 [key name] is stuck.	A key is stuck on the PFD bezel. Attempt to free the stuck key by pressing it several times. The system should be serviced if the problem persists.
PFD1 SERVICE – PFD1 needs service. Return unit for repair.	The PFD self-test has detected a problem. The system should be serviced.
PFD1 TERRAIN DSP – PFD1 Terrain awareness display unavailable.	One of the terrain or obstacle databases required for TAWS in PFD1 is missing or invalid.
PFD2 VOLTAGE – PFD2 has low voltage. Reducing power usage	The PFD2 voltage is low. The system should be serviced.
PILOT RADIOS MUTED – Pilot radios are muted.	The pilot radios are set on mute.
PTK FAIL – Parallel track unavailable: invalid leg type.	Invalid leg type for parallel offset.
PTK FAIL – Parallel track unavailable: past IAF.	IAF waypoint for parallel offset has been passed.
PTK FAIL – Parallel track unavailable: bad geometry.	Bad parallel track geometry.
SCHEDULER [#] – <message>.	Message criteria entered by the user.
SLCT FREQ – Select appropriate frequency for approach.	The system notifies the pilot to load the approach frequency for the appropriate NAV receiver. Select the correct frequency for the approach.
SLCT MAG – Select MAGNETIC NAV ANGLE display units.	The system notifies the pilot to set the Nav Angle units on the Avionics Settings Screen to Magnetic.
SLCT NAV – Select NAV on CDI for approach.	The system notifies the pilot to set the CDI to the correct NAV receiver. Set the CDI to the correct NAV receiver.
SLCT NON-MAG – Select alternate NAV ANGLE display units.	The system notifies the pilot to set the Nav Angle units on the Avionics Settings Screen to True.
STEEP TURN – Steep turn ahead.	A steep turn is 15 seconds ahead. Prepare to turn.
STRMSCP FAIL – Stormscope has failed.	Stormscope has failed. The system should be serviced.
SVT DISABLED – Out of available terrain region.	Synthetic Vision is disabled because the aircraft is not within the boundaries of the installed terrain database.
SVT DISABLED – Terrain DB resolution too low.	Synthetic Vision is disabled because a terrain database of sufficient resolution is not currently installed.
SW MISMATCH – GDU software version mismatch. Xtalk is off.	The MFD and PFD have different software versions installed. The system should be serviced.
TERRAIN AUD CFG – Trn Awareness audio config error. Service req'd.	TAWS is disabled because the audio configuration is invalid. The system should be serviced.
TERRAIN DISABLED – Terrain Awareness DB resolution too low.	TAWS is disabled because a terrain database of sufficient resolution is not currently installed.

Message	Comments
TIMER EXPIRD – Timer has expired.	The system notifies the pilot the timer has expired.
TRAFFIC FAIL – Traffic device has failed.	The system is no longer receiving data from the traffic system. The traffic device should be serviced.
TRN AUD FAIL – Trn Awareness audio source unavailable	Terrain Awareness audio is unavailable. The system should be serviced.
UNABLE V WPT – Can't reach current vertical waypoint.	The current vertical waypoint can not be reached within the maximum flight path angle and vertical speed constraints. The system automatically transitions to the next vertical waypoint.
VNV – Unavailable. Excessive crosstrack error.	The current crosstrack exceeds the limit, causing vertical deviation to go invalid.
VNV – Unavailable. Excessive track angle error.	The current track angle error exceeds the limit, causing the vertical deviation to go invalid.
VNV – Unavailable. Parallel course selected.	A parallel course has been selected, causing the vertical deviation to go invalid.
VNV – Unavailable. Unsupported leg type in flight plan.	The lateral flight plan contains a procedure turn, vector, or other unsupported leg type prior to the active vertical waypoint. This prevents vertical guidance to the active vertical waypoint.
WPT ARRIVAL – Arriving at waypoint -[xxxx]	Arriving at waypoint [xxxx], where [xxxx] is the waypoint name.
XPDR1 ADS-B 1090 – Datalink: ADS-B 1090 receiver has failed.	A failure has been detected in the 1090 receiver.
XPDR1 ADS-B FAIL – Transponder: XPDR1 is unable to transmit ADS-B messages.	ADS-B is inoperative. The transponder may not be receiving a valid GPS position. Other transponder functions may be available. Service when possible.
XPDR1 ADS-B NO POS – Transponder: ADS-B is not transmitting position.	The transponder is not able to receive position information.
XPDR1 ADS-B TRFC – Transponder: ADS-B traffic has failed	The Transponder is incapable of processing traffic information.
XPDR1 ADS-B UAT – Datalink: ADS-B in UAT receiver has failed.	A failure has been detected in the UAT receiver.
XPDR1 CONFIG – XPDR1 config error. Config service req'd.	The transponder configuration settings do not match those of backup configuration memory. The system should be serviced.
XPDR1 CSA FAIL – Traffic: ADS-B In traffic alerting has failed.	ADS-B Conflict Situational Awareness (CSA) is unavailable.
XPDR1 FAIL – XPDR1 is inoperative.	There is no communication with the #1 or #2 transponder.
XPDR1 FAULT – Datalink: ADS-B in has failed.	The transponder is unable to receive ADS-B information.
XPDR1 FIS-B WX – Datalink: FIS-B Weather has failed.	The transponder is unable to receive FIS-B weather information.
XPDR1 OVER TEMP – Transponder: Transponder over temp.	The system has detected an over temperature condition in XPDR1. The transmitter operates at reduced power. If the problem persists, the system should be serviced.
XPDR1 PRES ALT – Transponder: ADS-B no pressure altitude.	Unable to provide pressure altitude information.

Message	Comments
XPDR1 SRVC – XPDR1 needs service. Return unit for repair.	The #1 transponder should be serviced when possible.
XPDR1 UNDER TEMP – Transponder: Transponder under temp.	The system has detected an under temperature condition in XPDR1. The transmitter operates at reduced power. If the problem persists, the system should be serviced.
XTALK ERROR – A flight display crosstalk error has occurred.	The MFD and PFD are not communicating with each other. The system should be serviced.

DATABASE MANAGEMENT

Database information is obtained from third party sources. Inaccuracies in the data may be discovered from time to time. Garmin communicates this information by issuing a Database Alert. These notifications are available on flygarmin.com.

Garmin requests the flight crew report any observed discrepancies related to database information. These discrepancies could come in the form of an incorrect procedure; incorrectly identified terrain, obstacles and fixes; or any other displayed item used for navigation or communication in the air or on the ground.

Go to flygarmin.com and select Aviation Data Error Report.

A 32 GB Supplemental Data (SD) card (including FS 510 Wireless Transceiver card when used as a storage device) is required to perform database updates. Only cards provided by Garmin or the OEM should be used. In the event there is a file corruption problem with the SD card or Wireless Transceiver card, it may be necessary to reformat the card. This can cause an issue when formatting using Mac OS, where the newly formatted device will not be recognized by the avionics system. When using a Macintosh computer to format the SD card or Wireless Transceiver card, Garmin recommends using the SD Memory Card Formatter application made available by the SD Association as a download from sdcard.org. When running the application, use the Quick Format option.



NOTE: Use of SD cards that are not Garmin or OEM provided may cause system malfunctions when left in the MFD after the databases are loaded.

Databases may be loaded through Garmin Pilot™ and Wireless Transceiver. When loading databases through Garmin Pilot™ and the Wireless Transceiver, the Wireless Transceiver must be enabled on the system and the Wireless Transceiver card inserted in the bottom SD slot of the MFD.

LOADING UPDATED DATABASES



CAUTION: Never disconnect power to the system when loading a database. Power interruption during the database loading process could result in maintenance being required to reboot the system.



NOTE: When loading database updates, the 'DB Mismatch' message will be displayed until database synchronization is complete, followed by turning system power off, then on. Synchronization can be monitored on the 'Aux-Database' Page.

The cycles and dates for both standby and active databases are displayed on the 'Aux – Databases' Page on the MFD. Any active databases with expiration dates in the past will be highlighted with amber text. When an expired active database has a standby database that is ready to become effective, a cyan double-sided arrow will be displayed between the database cycles. When this arrow is visible, it indicates the standby and active databases in that row will be switched on the next power cycle, activating the current standby database. Databases can also be manually selected (or deselected) by highlighting a list item and pressing the **ENT** Key, provided a valid, verified standby database is present.

In some cases it may be necessary to obtain an unlock code from Garmin in order to make the database product functional. It may also be necessary to have the system configured by a Garmin authorized service facility in order to use some database features.

In some cases it may be necessary to obtain an unlock code from Garmin in order to make the database product functional. It may also be necessary to have the system configured by a Garmin authorized service facility in order to use some database features.

The navigation database contains the aeronautical data used by the system for the flight management and flight planning functions. Included is detailed data for waypoints, procedures (arrivals, departures, approaches), and airways. The navigation database is updated every 28 days.

The basemap database contains data for the topography and land features, such as rivers, lakes, and towns. It is updated only periodically, with no set schedule. There is no expiration date.

The terrain database contains the terrain mapping data. These databases are updated periodically and have no expiration date.

The obstacle database contains data for obstacles, such as towers, that pose a potential hazard to aircraft. Obstacles 200 feet and higher are included in the obstacle database. It is very important to note that not all obstacles are necessarily charted and therefore may not be contained in the obstacle database. This database is updated on a 56-day cycle.



NOTE: *The data contained in the terrain and obstacle databases comes from government agencies. Garmin accurately processes and cross-validates the data, but cannot guarantee the accuracy and completeness of the data.*

The AOPA or AC-U-KWIK Airport Directory provides data on airports and heliports throughout the U.S. or worldwide, respectively. The AOPA Directory offers detailed information for over 5,300 U. S. airports, along with the names and phone numbers of thousands of FBOs. These databases are updated every 56 days. The AC-U-KWIK Directory offers detailed information for more than 8,000 airports with runways longer than 3,000 feet worldwide.

The SafeTaxi database contains detailed airport diagrams for selected airports. These diagrams aid in following ground control instructions by accurately displaying the aircraft position on the map in relation to taxiways, ramps, runways, terminals, and services. This database is updated on a 56-day cycle.

The FliteCharts database contains procedure charts. This database is updated on a 28-day cycle. If not updated within 180 days of the expiration date, FliteCharts will no longer function.

The optional ChartView database is updated on a 14-day cycle. If the ChartView database is not updated within 70 days of the expiration date, ChartView will no longer function. The ChartView database must be purchased directly from Jeppesen, but can be updated at jeppesen.com or flygarmin.com.

The IFR/VFR charts database contains VFR and IFR raster charts. The VFR Charts are digital representations of the Sectional Aeronautical Charts and Terminal Area Charts. The IFR Charts include both IFR High (designed for navigation at or above 18,000 ft) and IFR Low (designed for navigation below 18,000 ft). IFR/VFR Charts are updated every 28 days except for Canadian IFR/VFR Charts which are updated every 56 days.

UPDATING DATABASES WITH SD CARD OR WIRELESS TRANSCEIVER CARD

All databases are updated through a single SD card or Wireless Transceiver card in the bottom slot of the MFD. When the card is inserted, the databases on the card will be copied to standby and synchronized across all powered, configured units. After update, the card is removed and the databases are stored on the system. When in standby, databases are not immediately available for use, but stored to be activated at a later time.

Database updates can be obtained by following the instructions detailed in the 'Aviation Databases' section of the Garmin website (flygarmin.com). Once the updated files have been downloaded from the website, a personal computer equipped with an appropriate SD card reader is used to unpack and program the new databases onto an existing SD card. When database files are loaded to the SD card, any previously loaded database files of the same type residing on the SD card will be overwritten. This includes loading a database of a different coverage area or data cycle than that currently residing on the SD card. Equipment required to perform the update is as follows:

- » PC with Window Vista or later/Mac with OS X 10.9 or later
- » SD card Reader: SanDisk SDDR-93, SanDisk SDDR-99, Verbatim #96504, or equivalent.
- » Garmin SD card reader for Wireless Transceiver cards.
- » Updated databases obtained from the Garmin website.
- » Garmin or OEM provided 32 GB SD card or Wireless Transceiver card.

Update Databases:

- 1) Download and install the databases on an SD card or the Wireless Transceiver card.
- 2) Put the card in the bottom SD card slot of the MFD.
- 3) Turn the system ON.
- 4) Press the **ENT** Key or the right-most softkey on MFD display to acknowledge the startup screen.
- 5) Turn the large **FMS** Knob and select 'Aux'.
- 6) Turn the small **FMS** Knob and select 'Databases'.
- 7) Database synchronization will begin. Monitor the Sync Status on the 'Aux-Databases' Page. Wait for all databases to complete syncing, indicated by 'Sync Complete' being displayed. A cyan double-arrow will appear between the 'Standby' and 'Active' columns to show which Standby databases will be transferred to 'Active' at the next power cycle.

	Standby (Effective)	Active (Expires)
Navigation	2006 21-MAY-20	2005 21-MAY-20
Basemap Land	19M1 N/A	19M1 N/A
Terrain	16T1 N/A	16T1 N/A
Obstacle	20B3 21-MAY-20	20B2 21-MAY-20
SafeTaxi	20S5 21-MAY-20	20S4 21-MAY-20
Airport Directory	20D5 21-MAY-20	20D4 21-MAY-20
FliteCharts	2006 21-MAY-20	2005 21-MAY-20
ChartView	2006 29-MAY-20	2006 29-MAY-20

Figure B-1 'Databases' Page before Activation of Standby Databases

- 8) Verify the correct database cycle information is shown in the 'Standby' Column.
- 9) Remove and reapply power to the system.
- 10) Press the **ENT** Key or the right-most softkey on MFD display to acknowledge the start-up screen.

- 11) Turn the large **FMS** Knob and select 'Aux'.
- 12) Turn the small **FMS** Knob and select 'Databases'.
- 13) Verify the standby databases transferred and are now in the 'Active' Column.

System Databases	Standby (Effective)	Active (Expires)
Navigation	2005 23-APR-20	2006 18-JUN-20
Basemap Land	19M1 N/A	19M1 N/A
Terrain	16T1 N/A	16T1 N/A
Obstacle	20B2 26-MAR-20	20B3 16-JUL-20
SafeTaxi	20S4 26-MAR-20	20S5 16-JUL-20
Airport Directory	20D4 26-MAR-20	20D5 18-JUN-20
FliteCharts	2005 23-APR-20	2006 18-JUN-20
ChartView	2006 29-MAY-20	2006 29-MAY-20

Figure B-2 Databases Page - Updated Databases

- 14) To manually activate any databases that did not transfer to the 'Active' Column:
 - a) Press the **FMS** Knob. The first database title on the screen will be selected.
 - b) To select the database for transfer, press the **ENT** Key. A cyan double-sided arrow will appear indicating the standby database will become active.

Or:

Press the **Menu** Key and select 'Swap Standby and Active' using the small **FMS** Knob and press the **ENT** Key. A cyan double-sided arrow will appear indicating the standby database will become active. Press the **ENT** Key or the **FMS** Knob to exit.

 - c) Turn the small **FMS** Knob as necessary to select the additional titles.
 - d) Repeat steps a through c for additional databases to be transferred.
 - e) Remove and reapply power to the system.
 - f) Press the **ENT** Key or the right-most softkey on MFD display to acknowledge the start-up screen.
 - g) Turn the large **FMS** Knob and select Aux.
 - h) Turn the small **FMS** Knob and select Databases.
 - i) Verify the standby databases transferred and are now in the 'Active' Column.
 - 15) For additional information on each database, press and then turn the **FMS** Knob to select the database, and then press the **Details** Softkey. Press the **ENT** Key or the **FMS** Knob to exit.
- Or:**
- Press the **Menu** Key and select 'View Details' using the small **FMS** Knob and press the **ENT** Key. Press the **ENT** Key or the **FMS** Knob to exit.

- 16) To view database information for an individual display:
 - a) Turn the large **FMS** Knob and select Aux.
 - b) Turn the small **FMS** Knob and select System Status.
 - c) Press the Display Database Selection Softkey (MFD1 DB, PFD1 DB) to show database information for each display. Use the small **FMS** Knob to scroll through the database information. Press the **ENT** Key or the **FMS** Knob to exit.

UPDATING DATABASES WITH GARMIN PILOT / WIRELESS TRANSCEIVER

In order to load databases through Garmin Pilot™ and the Wireless Transceiver, the Wireless Transceiver must be enabled on the system and inserted in the bottom SD slot of the MFD. A mobile device with Garmin Pilot™ must be paired with the wireless transceiver over Bluetooth (Refer to the Additional Features section). When the system is enabled it will automatically connect to the preferred device. If the preferred device has not been selected or is not available, the system will automatically connect to the first of any available, paired devices. The preferred device can be selected on the 'Aux - Databases' Page from a menu list of paired devices.

Once a connection to the paired mobile device is made, Garmin Pilot™ makes available databases that can be transferred to the Wireless Transceiver. If any of these databases is more recent than the respective standby database on the system, (or if there is no standby database on the system) those databases will be automatically selected to load. The database updates may be initiated from the 'Aux - Databases' Page, or from other pages on the MFD.



NOTE: The system will only provide a WIFI connection if new databases have been detected for download on Garmin Pilot™ WIFI a valid Bluetooth connection. If there are no database updates required the system will not provide a WiFi signal.



NOTE: If the mobile device has previously connected to the Wireless Transceiver, and is not connected to another bluetooth device, the mobile device should connect automatically to the Wireless Transceiver. If the mobile device is connected to another bluetooth device, then the Wireless Transceiver will not connect automatically.



NOTE: For these instructions, if Automatic Swap has been disabled, no databases will be selected to transfer from Standby to Active. Use the instructions later in this section to update databases from the 'Aux - Databases' Page, or use the instructions later in this section to enable Automatic Swap.

Update Databases from any MFD page (except the 'Aux - Databases' Page):

- 1) Insert the Wireless Transceiver card in the bottom slot of the MFD if not already inserted.
- 2) Turn the system ON.
- 3) Press the **ENT** Key or the right-most softkey on MFD display to acknowledge the startup screen.
- 4) On the mobile device, start Garmin Pilot and touch **Home > Connex > Database Concierge**.
- 5) Turn the large **FMS** Knob and select 'Aux'.
- 6) Turn the small **FMS** Knob and select the 'Connex Setup'.
- 7) Ensure that WIFI Database Import is enabled in the 'Device' Window (Refer to Additional Features section for instructions to enable WIFI Database Import).



Figure B-3 'Connex Setup' Page

- 8) Verify the mobile device is enabled via Bluetooth in the Bluetooth settings on the mobile device.
- 9) In the 'Paired Devices' Window on the 'Connex Setup' Page, ensure the system is paired with the mobile device in use. (Refer to Additional Features for instructions on connection to a preferred device).



NOTE: The database updates may now be continued from any MFD page, however, the update windows shown in these instructions will not be shown on the 'Aux - Databases' Page. Use the instructions for updating databases from the 'Aux - Databases' Page if desired.

- 10) Press the **Update** Softkey when the following window appears. (Pressing the **View** Softkey will allow database updates to be viewed from the 'Aux Databases' Page, however, the windows shown below will not appear on the 'Aux Databases' Page. Pressing the **Ignore** Softkey will postpone the updates until further action is taken.)



Figure B-4 Database Update Available

- 11) If using a device that has not been previously paired with the system, a password prompt will appear on the mobile device. Enter the password shown in the 'Password' Field of the 'Aux - Connex Setup' Page.
- 12) The following window will appear. Database update progress may be monitored on the mobile device.

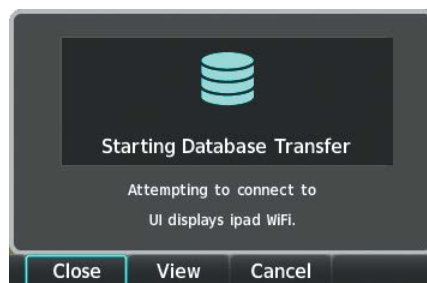


Figure B-5 Starting Database Transfer

- 13) When the transfer is complete, the following screen will appear.

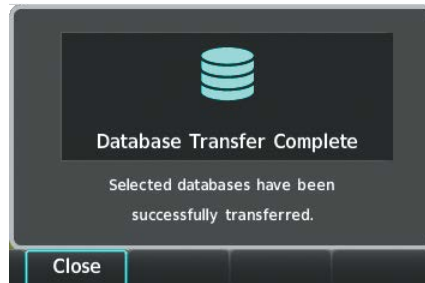


Figure B-6 Database Transfer Complete

- 14) Press the **Close** Softkey.
- 15) Remove and reapply power to the system.
- 16) Press the **ENT** Key or the right-most softkey on MFD display to acknowledge the startup screen.
- 17) Turn the large **FMS** Knob and select 'Aux'.
- 18) Turn the small **FMS** Knob and select 'Databases'.
- 19) Verify the standby databases transferred and are now in the 'Active' Column.

95	GS 116KT	DTK ____°	TRK 360°	ETE ____	DEST ETE ____	FOD ____	GAL ____
95	Aux - Databases						
Status							
Databases		OK					
Database Update		No update in progress					
Preferred Device		Keith's iPad					
System Databases							
		Standby (Effective)		Active (Expires)			
Navigation		2005		2006			
		23-APR-20		18-JUN-20			
Basemap Land		19M1		19M1			
		N/A		N/A			
Terrain		16T1		16T1			
		N/A		N/A			
Obstacle		20B2		20B3			
		26-MAR-20		16-JUL-20			
SafeTaxi		20S4		20S5			
		26-MAR-20		16-JUL-20			
Airport Directory		20D4		20D5			
		26-MAR-20		18-JUN-20			
FliteCharts		2005		2006			
		23-APR-20		18-JUN-20			
ChartView		2006		2006			
		29-MAY-20		29-MAY-20			

Figure B-7 'Databases' Page with Updated Databases

- 20) To manually activate any databases that did not transfer to the 'Active' Column:
 - a) Press the **FMS** Knob. The first database title on the screen will be selected.
 - b) To select the database for transfer, press the **ENT** Key. A cyan double-sided arrow will appear indicating the standby database will become active.

Or:

Press the **Menu** Key and select 'Swap Standby and Active' using the small **FMS** Knob and press the **ENT** Key. A cyan double-sided arrow will appear indicating the standby database will become active. Press the **ENT** Key or the **FMS** Knob to exit.

 - c) Turn the small **FMS** Knob as necessary to select the additional titles.

- d) Repeat steps a through c for additional databases to be transferred.
 - e) Remove and reapply power to the system.
 - f) Press the **ENT** Key or the right-most softkey on MFD display to acknowledge the start-up screen.
 - g) Turn the large **FMS** Knob and select Aux.
 - h) Turn the small **FMS** Knob and select Databases.
 - i) Verify the standby databases transferred and are now in the 'Active' Column.
- 21) For additional information on each database, press and then turn the **FMS** Knob to select the database, and then press the **Details** Softkey. Press the **ENT** Key or the **FMS** Knob to exit.
- Or:**
- Press the **Menu** Key and select 'View Details' using the small **FMS** Knob and press the **ENT** Key. Press the **ENT** Key or the **FMS** Knob to exit.
- 22) To view database information for an individual display:
- a) Turn the large **FMS** Knob and select Aux.
 - b) Turn the small **FMS** Knob and select System Status.
 - c) Press the Display Database Selection Softkey (MFD1 DB, PFD1 DB) to show database information for each display. Use the small **FMS** Knob to scroll through the database information. Press the **ENT** Key or the **FMS** Knob to exit.

Update Databases from the 'Aux - Databases' Page:



NOTE: The system will only provide a WIFI connection if new databases have been detected for download on Garmin Pilot via a valid Bluetooth connection. If there are no database updates required the system will not provide a WIFI signal.



NOTE: If the mobile device has previously connected to the Wireless Transceiver, and is not connected to another bluetooth device, the mobile device should connect automatically to the Wireless Transceiver. If the mobile device is connected to another bluetooth device, then the Wireless Transceiver will not connect automatically.

- 1) Insert the wireless transceiver SD card in the bottom slot of the MFD if not already inserted.
- 2) Turn the system ON.
- 3) Press the **ENT** Key or the right-most softkey on MFD display to acknowledge the start-up screen.
- 4) On the mobile device, start Garmin Pilot and touch **Home > Connex > Database Concierge**.
- 5) Turn the large **FMS** Knob and select 'Aux'.
- 6) Turn the small **FMS** Knob and select the 'Connex Setup'.
- 7) Ensure that WIFI Database Import is enabled in the 'Device' Window (Refer to Additional Features section for instructions to enable WIFI Database Import).



Figure B-8 'Connex Setup' Page

- 8) Verify the mobile device is enabled via Bluetooth in the Bluetooth settings on the mobile device.
- 9) In the 'Paired Devices' Window on the 'Connex Setup' Page, ensure the system is paired with the mobile device in use. (Refer to Additional Features for instructions on connection to a preferred device).
- 10) Press the **Device** Softkey to view databases that are ready to be loaded from the mobile device (pressing the **Stby/Actv** Softkey will again display the current Standby and Active databases).
- 11) The 'Aux - Databases' Page will show the databases connected to the mobile device in place of the active databases on the system. Databases selected to load to the system will be indicated by a single cyan arrow.
- 12) Press the **Update** Softkey.
- 13) If using a device that has not been previously paired with the system, a password prompt will appear on the mobile device. Enter the password shown in the 'Password' Field of the 'Aux - Connex Setup' Page.
- 14) Database Update status will appear in the 'Status' Window at the top of the page. Monitor update progress in the 'Status' Window, or on the mobile device.



Figure B-9 Device Database Transfer

- 15) When all databases have been successfully transferred from the mobile device, they will appear in the Standby Column.
- 16) Database synchronization will begin. Monitor the 'Sync Status' on the 'Aux-Databases' Page. Wait for all databases to complete synchronizing, indicated by 'Sync Complete' being displayed. A cyan double-arrow will appear between the 'Standby' and 'Active' Columns to show which Standby databases will be transferred to 'Active' at the next power cycle.

- 17) Remove and reapply power to the system.
- 18) Press the **ENT** Key or the right-most softkey on MFD display to acknowledge the startup screen.
- 19) Turn the large **FMS** Knob and select 'Aux'.
- 20) Turn the small **FMS** Knob and select 'Databases'.
- 21) Verify the standby databases transferred and are now in the 'Active' Column.

	Standby (Effective)	Active (Expires)
Navigation	2005 23-APR-20	2006 18-JUN-20
Basemap Land	19M1 N/A	19M1 N/A
Terrain	16T1 N/A	16T1 N/A
Obstacle	20B2 26-MAR-20	20B3 16-JUL-20
SafeTaxi	20S4 26-MAR-20	20S5 16-JUL-20
Airport Directory	20D4 26-MAR-20	20D5 18-JUN-20
FliteCharts	2005 23-APR-20	2006 18-JUN-20
ChartView	2006 29-MAY-20	2006 29-MAY-20

Figure B-10 'Database' Page with Updated Databases

- 22) To manually activate any databases that did not transfer to the 'Active' Column:
 - a) Press the **FMS** Knob. The first database title on the screen will be selected.
 - b) To select the database for transfer, press the **ENT** Key. A cyan double-sided arrow will appear indicating the standby database will become active.

Or:

Press the **Menu** Key and select 'Swap Standby and Active' using the small **FMS** Knob and press the **ENT** Key. A cyan double-sided arrow will appear indicating the standby database will become active. Press the **ENT** Key or the **FMS** Knob to exit.

 - c) Turn the small **FMS** Knob as necessary to select the additional titles.
 - d) Repeat steps a through c for additional databases to be transferred.
 - e) Remove and reapply power to the system.
 - f) Press the **ENT** Key or the right-most softkey on MFD display to acknowledge the start-up screen.
 - g) Turn the large **FMS** Knob and select Aux.
 - h) Turn the small **FMS** Knob and select Databases.
 - i) Verify the standby databases transferred and are now in the 'Active' Column.

- 23) For additional information on each database, press and then turn the **FMS** Knob to select the database, and then press the **Details** Softkey. Press the **ENT** Key or the **FMS** Knob to exit.

Or:

Press the **Menu** Key and select 'View Details' using the small **FMS** Knob and press the **ENT** Key. Press the **ENT** Key or the **FMS** Knob to exit.

- 24) To view database information for an individual display:
- Turn the large **FMS** Knob and select Aux.
 - Turn the small **FMS** Knob and select System Status.
 - Press the Display Database Selection Softkey (MFD1 DB, PFD1 DB) to show database information for each display. Use the small **FMS** Knob to scroll through the database information. Press the **ENT** Key or the **FMS** Knob to exit.

DELETING DATABASES

If databases are not properly loading or functioning, and an attempt has been made to load the databases using a new SD card or multimedia card, it may be necessary to delete the databases from the system.

Deleting databases:

- Turn the large **FMS** Knob and select 'Aux'.
- Turn the small **FMS** Knob and select 'Databases'.
- Press the **Menu** Key.
- Turn the small **FMS** Knob to select 'Delete Databases.'
- Press the **ENT** Key.
- A prompt will appear to confirm deletion of all internal databases. Push the **ENT** Key.

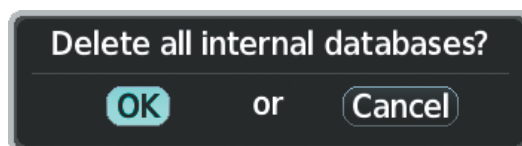


Figure B-11 Delete Databases Confirmation Window

- 7) Another prompt will appear to confirm deletion of all internal databases. Push the **ENT** Key.

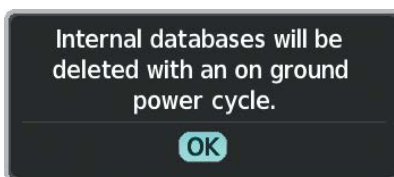


Figure B-12 Delete Databases Confirmation Window

- Remove and reapply power to the system.
- Press the **ENT** Key or the right-most softkey on MFD display to acknowledge the startup screen.
- Turn the large **FMS** Knob and select 'Aux'.
- Turn the small **FMS** Knob and select 'Databases'.
- Confirm that all databases have been deleted from the system.

MAGNETIC FIELD VARIATION DATABASE UPDATE

A copy of the current magnetic field variation database (MV DB) is included with the navigation database. At startup, the system compares this version of the MV DB with that presently being used by the AHRS (GRS1). If the system determines the MV DB needs to be updated, a prompt is displayed on the MFD, as shown in Figure B-13.

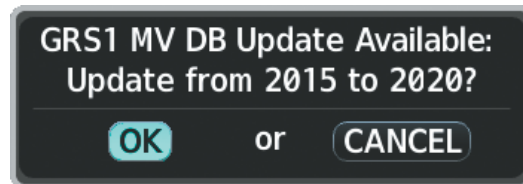


Figure B-13 GRS1 Magnetic Field Variation Database Update Prompt

Load the magnetic field variation database update:

- 1) With 'OK' highlighted, as seen in Figure B-13, press the **ENT** Key on the MFD. A progress monitor is displayed as shown in Figure B-14.



Figure B-14 Uploading Database to GRS1

- 2) When the upload is complete, the system is ready for use.

AVIATION TERMS, ABBREVIATIONS, AND ACRONYMS

A	Amps, Amperes	ALTM	Altimeter
ABN	Abnormal	ALTS	Altitude Select, Selected Altitude Capture Mode
AC	Advisory Circular, Alternating Current	ALTV	VNAV Altitude Capture Mode
ACARS	Aircraft Communications Addressing and Reporting System	AM	Amplitude Modulation
ACC	Accuracy	AMP	Amplifier, Ampere
ACFT	Aircraft	AMPS	Amperes
ACK	Acknowledge	ANN/ANNUNC	Annunciation/Annunciator
ACT, ACTV	Active, Activate, Altitude Compensated Tilt	ANSP	Air Navigation Service Provider
ADAHRS	Air Data, Attitude and Heading Reference System	ANT	Antenna
ADC	Air Data Computer	AOA	Angle of Attack, ACARS Over AVLK
ADF	Automatic Direction Finder	AOC	Aeronautical Operational Control
ADI	Attitude Direction Indicator	AOG	Aircraft On Ground
ADIZ	Air Defense Identification Zone	AOPA	Aircraft Owners and Pilots Association
ADM	Administrative Domain	AP	Autopilot
ADS-B	Automatic Dependent Surveillance-Broadcast	AP DISC	Autopilot Disconnect
ADS-C	Automatic Dependent Surveillance-Contract	APPR, APR	Approach, Approach Control
ADS-R	Automatic Dependent Surveillance-Rebroadcast	APT	Airport, Aerodrome, Automatic Pitch Trim
AEA	Aircraft Electronic Association	APTSIGNS	Airport Signs
AF	Arc to Fix Leg	APU	Auxiliary Power Unit
AFCS	Automatic Flight Control System	APV	Approaches with Vertical Guidance
AFM	Airplane Flight Manual	ARINC	Aeronautical Radio Incorporated
AFMS	Airplane Flight Manual Supplement	ARM	Arm, Armed
AFN	ATS Facilities Notification	ARSPC	Airspace
AFRM	Airframe	ARTCC	Air Route Traffic Control Center
AFTN	Aeronautical Fixed Telecommunication Network	ARV	Arrival
A/G	Air-to-Ground	AS	Airspeed
AGL	Above Ground Level	ASB	Aviation Support Branch
AHRS	Attitude and Heading Reference System	ASDA	Accelerate-Stop Distance Available
AIM	Aeronautical Information Manual	ASI	Airspeed Indicator
AIRB	Airborne	ASOS	Automated Surface Observing System
AIRMET, AIRM	Airman's Meteorological Information	AT	Auto Throttle
AIRREP	Air Reports	ATAS	ADS-B Traffic Advisory System
ALRT	Alert, Alerting	ATC	Air Traffic Control
ALT	Altitude	ATCRBS	ATC Radar Beacon System
ALT, ALTN	Alternator, Alternate	ATD	Along-Track Distance
		ATE	Along-Track Error, Automatic Test Equipment
		ATIS	Automatic Terminal Information Service
		ATK	Along Track

ATN	Aeronautical Telecommunications Network	CAS	Crew Alerting System
ATS	Air Traffic Services	CAT	Clear Air Turbulence
ATT	Attitude	CLB	Climb
ATZ	Aerodrome Traffic Zone	CB	Circuit Breaker
AUD	Audio	CCG	Current Climb Gradient
AUTO	Automatic	CD	Course to DME Distance Leg
AUTOSEQ	Automatic Sequence	CDA	Current Data Authority
AUX	Auxiliary	CDI	Course Deviation Indicator
AVAIL	Available	CDU	Control Display Unit
AVG	Average	CF	Course to Fix Leg
AVLC	Aviation VHF Link Control	CFG	Configuration
AWOS	Automated Weather Observing System	CFIT	Controlled Flight into Terrain
AWY	Airway	CG	Center of Gravity
AZ	Azimuth	CH, CHNL	Channel
B	Both Runways	CHK	Check
B ALT	Barometric Altitude	CHKLST	Checklist
BC, B/C	Back Course	CHRG	Charge
BARO	Barometer, Barometric Setting	CHT	Cylinder Head Temperature
BATT	Battery	CI	Course to Intercept Leg
Bearing	The compass direction from the present position to a destination waypoint.	CIP	Current Icing Potential
BFO	Beat Frequency Oscillator	CL	Class, Centerline
BKLT	Backlight	CLB	Climb
BKSP	Backspace	CLD	Cloud
BKUP	Backup	CLG	Ceiling
BLKHD	Bulkhead	CLR	Clear
Bluetooth	Wireless standard for data exchange over short distances	CLS	Close
BOC	Bottom of Climb	CLTR	Clutter
BOD	Bottom of Descent	CM	Centimeter, Context Management
BRG	see also Bearing	CMC	Central Maintenance Computer
BRK	Brake	CMPRTR	Comparator
BTM	Bottom	CN	Canada
°C	Degrees Celsius	CNCL	Cancel
C	Center Runway	CNFM	Confirm
CA	Course to Altitude Leg	CNI	Communication, Navigation, & Identification
CAL	Calibrated	CNS	Communication, Navigation, & Surveillance
CALC	Calculator	CNXT	Connext
Calibrated Airspeed	Indicated airspeed corrected for installation and instrument errors.	CO	Carbon Monoxide
		COM	Communication Radio

COMP	Compensated, Compensation	D->, -D➔	Direct-To
CONFIG	Configuration	D/A	Digital to Analog Converter
CONUS	Continental United States	D ALT	Density Altitude
COOL	Coolant	D-ATIS	Digital Automatic Terminal Info Service
COPLT	Copilot	DA	Decision Altitude, Drift Angle
CORR	Correct, Corrected, Correction	DB, DBASE	Database
Course	The line between two points to be followed by the aircraft.	DBZ	Decibels 'Z' (Radar Return)
Course to Steer	The recommended direction to steer in order to reduce course error or stay on course. Provides the most efficient heading to get back to the desired course and proceed along the flight plan.	DCL	Departure Clearance
CP	Copilot, Control Panel	DCLTR, DECLTR	Declutter
CPDLC	Controller Pilot Datalink Communications	DEC	Declination
CPL	Couple	DEC FUEL	Decrease Fuel
CR	Course to Radial Leg	DEG	Degree
CRC	Cyclic Redundancy Check	DEIC, DEICE	De-icing
CRG	Cockpit Reference Guide	DEL	Delete
CRNT	Current	DEP	Departure, Departure Control
Crosstrack Error	The distance the aircraft is off a desired course in either direction, left or right.	DESC	Descent
CRS	see also Course, Course to Steer	Desired Track	The desired course between the active "from" and "to" waypoints.
CRSR	Cursor	DEST, DES	Destination, Destination Airport Identifier
CRU, CRZ	Cruise	DET	Detect, Detected, Detection, Detector
CSA	Conflict Situational Awareness	DEV	Deviation
CSC	Current Speed Control	DF	Direction Finder, Direct to Fix Leg
CSTR	Constraint	DFLT	Default
CTA	Control Area	DG	Directional Gyro
CTAF	Common Traffic Advisory Frequency	DGPS	Differential GPS
CTR	Center, Controlled Traffic Region	DGRD	Degrade
CTRL	Control	DH	Decision Height
Cumulative, CUM	The total of all legs in a flight plan.	DIFF	Differential
CVDR	Cockpit Voice Data Recorder	Dilution of Precision	A measure of GPS satellite geometry quality on a scale of one to ten (lower numbers equal better geometry, where higher numbers equal poorer geometry).
CVFP	Charted Visual Flight Procedure	DIR	Direction
CVR	Cockpit Voice Recorder	DIS	Distance
CVRG	Coverage	DISENG	Disengage
CWS	Control Wheel Steering	DISP	Display
CYC CTR	Cyclic Centering	Distance	The 'great circle' distance from the present position to a destination waypoint.
CYL	Cylinder	DIV	Divert, Diversion
CZ	Control Zone	DL LTNG	Datalink Lightning
		DLS	Data Link System

DME	Distance Measuring Equipment	ELEC	Electrical
DN	Down	ELEV	Elevation, Elevator
DNALT	Density Altitude	ELT	Emergency Locator Transmitter
DNGR	Danger	EMER, EMERG, EMERGCY	Emergency
DNLK	Downlink	EMI	Electromagnetic Interference
DOD	Department of Defense	END, ENDUR	Endurance
DOP	see also Dilution of Precision	Endurance	Flight endurance, or total possible flight time based on available fuel on board.
DOPP	Doppler	ENG	Engine
DP	Departure Procedure, Differential Pressure	ENGA	Engage
DPRT	Departure	ENGD	Engaged
DQR	Data Quality Requirements	ENR	Enroute; ETE to Final Destination
DR	Dead Reckoning	Enroute Safe Altitude (ESA)	Uses Grid MORAs to determine a safe altitude within ten miles left or right of the desired course on an active flight plan or direct-to.
DSBL	Disabled	ENT	Enter
DSP	Display, Datalink Service Provider, Digital Signal Processor	EP	Envelope Protection
DTG	Distance To Go, Remaining distance to last active FPL waypoint	EPE	see also Estimated Position Error
DTK	see also Desired Track	EPU	Estimated Position Uncertainty
DWNGRADE	Downgrade	ERR	Error
E	Empty, East	ES	Extended Squitter
EAS	Engine and Airframe Systems	ESA	Emergency Safe Altitude, see also Enroute Safe Altitude
EC	Error Correction	ESOSP	Electronic Stability Overspeed Protection
ECC	Error Correcting Code	ESP	Electronic Stability and Protection
ECL	Electronic Checklist	Estimated Position Error (EPE)	A measure of horizontal GPS position error derived by satellite geometry conditions and other factors.
ECR	Excessive Closure Rate	Estimated Time Enroute (ETE)	The estimated time it takes to reach the destination waypoint from the present position, based upon current groundspeed.
ECS	Environmental Control System	Estimated Time of Arrival (ETA)	The estimated time at which the aircraft should reach the destination waypoint, based upon current speed and track.
ECU	Engine Control Unit	ET	Elapsed Time
EDM	Emergency Descent Mode	ETA	see also Estimated Time of Arrival
EDR	Excessive Descent Rate	ETD	Estimated Time of Departure
EEP	Expanded Envelope Protection	ETE	see also Estimated Time Enroute
EFB	Electronic Flight Bag	EVS	Enhanced Vision System
EFC	Expected Further Clearance	EXP	Expand
Efficiency	A measure of fuel consumption, expressed in distance per unit of fuel.		
EGNOS	European Geostationary Navigation Overlay Service		
EGT	Exhaust Gas Temperature		
EHS	Enhanced Surveillance		
EICAS	Engine Indication and Crew Alerting System		
EIS	Engine Indication System		

EXPIRD	Expired	FPM	Feet Per Minute, Flight Path Marker
EXT	External	FR	From
EXTD	Extend	FREQ	Frequency
EXTING	Extinguish, Extinguisher	FRMT	Format
EXTR	Extract, Extraction	FRT	Front
°F	Degrees Fahrenheit	FRZ	Freezing
FA	Course From Fix to Altitude Leg	FS	Flight Stream
FAA	Federal Aviation Administration	FSD	Full-Scale Deflection
FADEC	Full Authority Digital Engine Control	FSM	Flight System Messages
FAF	Final Approach Fix	FSS	Flight Service Station
FAIL	Failure	FT	Foot/Feet
FANS	Future Air Navigation System	Fuel Flow	The fuel flow rate, expressed in units of fuel per hour.
FAP	Final Approach Point	Fuel On Board	The total amount of usable fuel on board the aircraft.
FAPP	Final Approach	Fuel Over Destination	The estimated fuel remaining when the aircraft reaches the destination waypoint, based upon current fuel flow.
FAR	Federal Aviation Regulations	FWD	Forward
FBO	Fixed Base Operator	G/A	Ground to Air
F/C	Flight Crew	G/S	Glideslope
FC	Course From Fix to Distance Leg	GA	Go-Around
FCC	Federal Communication Commission	GAGAN	GPS Aided GEO Augmented Navigation
FCST	Forecast	GAGL	GPS AGL Altitude
FCTN	Function	GAL, GL	Gallon(s)
FD	Flight Director, Course From Fix to DME Distance Leg	GBAS	Ground Based Augmentation System
FDE	Fault Detection and Exclusion	GBOX	Gearbox
FDR	Flight Data Recorder	GBT	Ground Based Transceiver
FF, FFLOW	see also Fuel Flow	GCS	Ground Clutter Suppression
FIS-B	Flight Information Services-Broadcast	GCSS	Garmin Connex Satellite Services
FISDL	Flight Information Service Data Link	GCU	Garmin Control Unit
FIT	Flight Into Terrain	GDC	Garmin Air Data Computer
FL	Flight Level	GDL	Garmin Satellite Data Link
FLC, FLCH	Flight Level Change	GDR	Garmin Data Radio
FLT	Flight, Flight Timer	GDU	Garmin Display Unit
FLTA	Forward Looking Terrain Avoidance	GEA	Garmin Engine/Airframe Unit
FLW	Follow, Following	GEAR	Landing Gear
FM	Course From Fix to Manual Termination Leg	GEN	Generator
FMS	Flight Management System	GEO	Geographic
FOB	see also Fuel On Board	GFC	Garmin Flight Control
FOD	see also Fuel Over Destination	GHZ	Gigahertz
FPA	Flight Path Angle		
FPL	Flight Plan		

GIA	Garmin Integrated Avionics Unit	GW	Gross Weight
GLONASS	Global Orbiting Navigation Satellite Landing System	GWX	Garmin Weather Radar
GLS	Global Navigation Satellite Landing System	H	Hours
GMA	Garmin Audio Panel System	H+MM	Hours and Minutes
GMC	Garmin Mode Controller	HA	Hold Terminating at Altitude Leg
GMT	Greenwich Mean Time	HAL	Horizontal Alert Limit
GMU	Garmin Magnetometer Unit	HAT	Height Above Threshold
GND	Ground	HDG	see also Heading
GNSS	Global Navigation Satellite System	HDOP	Horizontal Dilution of Precision
GOLD	Global Operational Data Link	Heading	The direction an aircraft is pointed, based upon indications from a magnetic compass or a properly set directional gyro.
GP	Glidepath	HF	High Frequency, Hold Terminating at Fix Leg
GPH	Gallons per Hour	HFOM	see also Horizontal Figure of Merit
GPN	Garmin Part Number	HG	Mercury
GPS	Global Positioning System	HI	High
GPWS	Ground Proximity Warning System	HI SENS	High Sensitivity
GRA	Garmin Radar Altimeter	HLD	Hold, Holding, Holding Pattern
GRC	Garmin Remote Control	HM	Hold with Manual Termination Leg
Grid MORA (Minimum Off-Route Altitude)	One degree latitude by one degree longitude in size and clears the highest elevation reference point in the grid by: a) 1,000 feet where the highest elevation is <5001MSL or b) 2,000 feet where the highest elevation is >5000MSL	HNS	Hybrid Navigation Sensor
Ground Track	See Track	Horizontal Figure of Merit	A measure of the uncertainty in the aircraft's horizontal position.
Groundspeed	The velocity the aircraft is travelling relative to a ground position.	HOV	Hover
GRP	Geographic/Ground Reference Point	HOV-P	Hover Prediction
GRS	Garmin Reference System	HP	High Pressure, Horsepower
GRT	Garmin Radio Transceiver	HPA	Hectopascal
GS	Ground Speed, Glideslope	HPI	Hover Power Indicator
GSA	Garmin Servo Adapter	HPL	Horizontal Protection Level
GSD	Glideslope/Glidepath Deviation, Garmin Data Concentrator	HR	Hour
GSL	Geometric/Geodetic Sea Level	HRZN HDG	Horizon Heading
GSR	Garmin Satellite Radio	HSDB	High-Speed Data Bus
GSU	Garmin Sensor Unit	HSI	Horizontal Situation Indicator
GTC	Garmin Touchscreen Controller	HT	Heat, Height
GTS	Garmin Traffic System	HTR	Heater
GTX	Garmin Transponder	HUL	Horizontal Uncertainty Level
		HWND	Headwind
		HYD	Hydraulic
		HZ	Hertz (cycles per second)

HZN	Horizon	INT	Intersection(s)
I	Inner Marker	INTEG	Integrity (RAIM unavailable)
IAF	Initial Approach Fix	INTERN, INTRL	Internal
IAP	Instrument Approach Procedure	INV	Invalid
IAS	Indicated Air Speed	IOI	Imminent Obstacle Impact
IAT	Indicated Air Temperature	IR	Infrared
IATA	International Air Transport Association	IrDA, IRDA	Infrared Data Association
IAU	Integrated Avionics Unit	IRST	Infrared Surveillance and Tracking
IBD, INBD	Inboard	ISA	International Standard Atmosphere; ISA Relative Temperature
ICAO	International Civil Aviation Organization	ISO	International Standards Organization
ICE	Icing	ISOL	Isolation
ICS	Intercom System	ITI	Imminent Terrain Impact
ID	Identification/Morse Code Identifier	ITT	Inter-Turbine Temperature, Interstage Turbine Temperature
IDENT, IDNT	Identification	KEYSTK	Key Stuck
IEEE	Institute of Electrical & Electronics Engineers	KG	Kilogram
IF	Initial Fix	KHZ	Kilohertz
IFR	Instrument Flight Rules	KIAS	Knots Indicated Airspeed
IG	Imperial Gallon	KM	Kilometer
IGE	In Ground Effect	KT	Knot
ILI	Imminent Line Impact	L	Left, Left Runway
ILS	Instrument Landing System	LAT	Latitude, Lateral
IM	Inner Marker	LB	Pound
IMC	Instrument Meteorological Conditions	LBL	Label
IN	Inch	LCD	Liquid Crystal Display
IN HG, "HG	Inches of Mercury	LCL	Local
INACTV	Inactive	LDA	Landing Distance Available, Localizer Type Directional Aid
INBD	Inboard	LDG	Landing, ETA at Final Destination
INBND	Inbound	LED	Light Emitting Diode
INC FUEL	Increase Fuel	Left Over Fuel On Board	The amount of fuel remaining on board after the completion of one or more legs of a flight plan or direct-to.
IND	Indicator, Indicated	Left Over Fuel Reserve	The amount of flight time remaining, based on the amount of fuel on board after the completion of one or more legs of a flight plan or direct-to, and a known consumption rate.
Indicated	Information provided by properly calibrated and set instrumentation on the aircraft panel.	Leg	The portion of a flight plan between two waypoints.
INDX	Index	LEN	Length
INFO	Information	LGND	Legend
INH, INHIB	Inhibit		
INIT	Initialization		
INOP	Inoperative		
INS	Inertial Navigation System		
INSTR	Instrument		

LIFR	Low Instrument Flight Rules	MCT	Maximum Continuous Thrust
LI-ION	Lithium Ion	MDA	Barometric Minimum Descent Altitude
LIM	Limit	MEA	Minimum Enroute Altitude
LMM	Locator Middle Marker	MEM	Memory
LNAV	Lateral Navigation	MEPT	Manual Electric Pitch Trim
LO	Low	MET	Manual Electric Trim
LOA	Letter of Authorization	METAR	Aviation Routine Weather Report
LOC	Localizer	METRO	Metropolitan
LOI	Loss of Integrity (GPS)	MFI	Multi-Function Instrument
LOM	Locator Outer Marker	MFD	Multi Function Display
LON, LONG	Longitude, Longitudinal	MFW	Multi Function Window
LP	Localizer Performance, Low Pressure	MGRS	Military Grid Reference System
LPV	Localizer Performance with Vertical Guidance	MGT	Measured Gas Temperature
LRU	Line Replaceable Unit	MHz	Megahertz
LSB V	Lower Sideband Voice	MIC	Microphone
LT	Left, Light	MID	Middle
LTNG	Lightning	MIN	Minimum, Minute
LVL	Level	MKR	Marker Beacon
M	Meter, Middle Marker, Mach	MM	Middle Marker
Mach Number	Mach number is the ratio of the true airspeed to the speed of sound.	MMO (VMO)	Maximum Speed
MAG	Magnetic	MOA	Military Operations Area
MAG VAR	Magnetic Variation	MOD	Modification, Modify
MAHP	Missed Approach Hold Point	MON	Monitor, Monitored, Monitoring
MAINT	Maintain	MORA	Minimum Off-Route Altitude
MAL	Malfunction	MOV	Movement
MAN	Manual	MPEL	Maximum Permissible Exposure Level
MAN IN	Manifold Pressure (inches Hg)	MPM	Meters per Minute
MAN SQ	Manual Squelch	MSA	Minimum Safe Altitude
MANSEQ	Manual Sequence	MSAS	Multi-functional Satellite Augmentation System
MAP	Missed Approach Point	MSG	Message
MAPROC	Missed Approach Procedure	MSL	Mean Sea Level
MASQ	Master Avionics Squelch	MT, M	Meter
MAX	Maximum	MTG	Mounting
MAXSPD	Maximum Speed (overspeed)	MTN	Mountain
MB	Marker Beacon, Millibar(s)	MTOGW	Maximum Takeoff Gross Weight
MCDU	Multifunction Control and Display Unit	MTOW	Maximum Takeoff Weight
MCLB	Maximum Climb Thrust	MV	Millivolt(s)
MCP	Maximum Continuous Power	MVFR	Marginal Visual Flight Rules
MCRZ	Maximum Cruise Thrust	N	North

NATS	North Atlantic Tracks System	OVFL	Overflow
NAV	Navigation	OVFLY	Overfly, Overflying
NAVAID	Navigation Aid	OVHD	Overhead
NCR	Negative Climb Rate	OVHT	Overheat
NDA	Next Data Authority	OVLIM	Overlimit
NDB	Non-Directional Beacon	OVLD	Overload
NEG	Negative	OVPR	Overpressure
NEXRAD	Next Generation Radar	OVR, OVRD	Override
NG	Gas Producer Rotation Speed	OVRN	Overrun
NM	Nautical Mile(s)	OVSPD	Overspeed
NMPG	Nautical Miles per Gallon	OVTMP	Overtemperature
NoPT	No Procedure Turn Required (procedure shall not be executed without ATC clearance)	OXY	Oxygen
		P ALT	Pressure Altitude
NORM	Normal	P-ATT	Pitch Attitude
NOTAM	Notice To Airman	PA	Precision Approach, Passenger Address, Proximity Advisory
NP	Power Turbine Speed	PB	Push Button
NPA	Non-Precision Approach	PASS, PAX	Passenger(s)
NR	Rotor Speed	PC	Personal Computer
NRST	Nearest	PCL	Pilot Controlled Lighting
NWHL	Nosewheel	PDA	Premature Descent Alerting
NWS	National Weather Service, Nosewheel Steering	PDC	Pre-Departure Clearance
O	Outer Marker	PED	Portable Electronic Device
OAT	Outside Air Temperature	PERF	Performance
OBD, OUTBD	Outboard	PFD	Primary Flight Display
OBS	Omni Bearing Selector, Observation, Observe, Observed	PFT	Preflight Test
OBSCR	Obscuration	PG	Pilot's Guide
OCL	Oceanic Clearance	PI	Procedure Turn to Course Intercept Leg
OEM	Original Equipment Manufacturer	PIREP	Pilot Report
OFST	Offset	PIT, PTCH	Pitch
OGE	Out of Ground Effect	PLT	Pilot
OM	Outer Marker	PNR	Prior Notice Required
OOOI	Out of the gate, Off the ground, On the ground, and In the gate	POA	Plain Old ACARS
OROCA	Off Route Obstacle Clearance Altitude	POB	Persons (Souls) on Board
OSP	Overspeed Protection	POF	Phase of Flight
OUTBD	Outboard	POH	Pilot's Operating Handbook
OUTBND	Outbound	POHS	Pilot's Operating Handbook Supplement
OVBD	Overboard	POS, POSN	Position
		POSS	Possible
		PPH	Pounds per Hour

PPM	Parts per Million	RES	Reserve (fuel reserve entered by pilot)
PPOS, P. POS	Present Position	REST	Restricted, Restriction
PREFLT	Preflight	RET	Return
PRES, PRESS, P	Pressure	REV	Reverse, Revision, Revise
PREV	Previous	RF	Radio Frequency, Constant Radius Turn to Fix Leg
PRI	Primary	RFM	Rotorcraft Flight Manual
PRL	Parallel	RLC	Required Line Clearance
PRN	Pseudo Random Noise	RMI	Radio Magnetic Indicator
PROC	Procedure(s), Procedure Turn	RMT	Remote
PROP	Propeller	RNAV	Area Navigation
PROX	Proximity	RNG	Range
PSI	Pounds per Square Inch, Power Situation Indicator	RNP	Required Navigation Performance
PT	Procedure Turn, Part Time	RNWX, RWY	Runway
PTK	Parallel Track	ROASS	Runway Overrun Awareness and Alerting System
PTT	Push-to-Talk	ROC	Required Obstacle Clearance, Rate of Climb
PWR	Power	ROD	Rate of Descent
Q	Engine Torque	ROL	Roll
QFE	Field Elevation Pressure	ROM	Read Only Memory
QNE	Pressure Altitude	ROT	Rotary
QNH	Sea Level Pressure	RPM	Revolutions Per Minute
QTY	Quantity	RQRD	Required
R	Right, Right Runway	RST FUEL	Reset Fuel
RA	Resolution Advisory, Radio Altimeter, Radar Altimeter	RSV	Reserve (fuel reserve entered by pilot)
RAD	Radial	RT	Right
RAD ALT	Radio Altimeter, Radar Altimeter	RTC	Required Terrain Clearance
RAIM	Receiver Autonomous Integrity Monitoring	RTE	Route
RAM	Random Access Memory	RTR	Router
RAT	Ram Air Temperature	RUDICS	Router-Based Unrestricted Digital Interworking Connectivity Solution
RCVR	Receiver	RVRSNRY	Reversionary
R/D	Radial/Distance	RVSI	Required Vertical Speed Indicator
RDR	Radar	RVSM	Reduced Vertical Separation Minimums
REC	Record, Recorder	RX	Receive
RECIRC	Recirculate/Recirculating	S	South
REF	Reference	SA	Selective Availability
REGL	Regulator	SAIB	Special Airworthiness Information Bulletin
REM	Remaining (fuel remaining), Reminder, Removed, Remote	SAR	Search and Rescue
REQ	Request	SAT	Static Air Temperature
REQD	Required		

SATCOM	Satellite Communication	SPBK	Speed Brake
SBAS	Satellite-Based Augmentation System	SPC	Space
S-CLB	Step Climb	SPD	Speed
SC	Short Circuit	SPI	Special Position Identification
SCIT	Storm Cell Identification and Tracking	SPKR	Speaker
S-DES	Step Descent	SQ, SQL	Squelch
SD	Secure Digital	SRVC, SVC	Service
SDF	Simplified Directional Facility	SSEC	Static Source Error Correction
SEC	Second(s)	SSID	Wireless Service Set Identifier
SECT	Section	SSR	Secondary Surveillance Radar
SEG	Segment	STAB	Stabilization
SEL, SLCT	Select	STAL	Stall
SELCAL	Selective Calling	STAR	Standard Terminal Arrival Route
SENS	Sense, Sensitivity	STAT	Status
SEQ	Sequence, Sequencing	STATS	Statistics
SERL	Serial	STBY	Standby
SERV	Service, Servicing, Served	STC	Sensitivity Time Constant, Supplemental Type Certificate
SET	Setup	STD	Standard
SFC	Surface	STN	Station
SHT	Short	STR	Strip
SIAP	Standard Instrument Approach Procedures	STRMSCP	Stormscope
SID	Standard Instrument Departure	SUA	Special Use Airspace
SIG	Signal	SUB	Substitute
SIG/AIR	SIGMET/AIRMET	SUPPRESS	Suppression
SIGM	SIGMET	SURF	Surface
SIGMET	Significant Meteorological Information	SUSP	Suspend
SIM	Simulator	SVBL	Serviceable
SITA	Societe Internationale de Telecommunications	SVT	Synthetic Vision Technology
SLD	Supercooled Large Droplet	SW	Software
SLP/SKD	Slip/Skid	SYN TERR	Synthetic Terrain
SLW	Slow	SYN VIS	Synthetic Vision
SM	Statute Mile	SYNC	Synchronize
SMBL	Symbol	SYNTH	Synthesizer
SMK	Smoke	SYS	System
SMS	Short Message System	T	True
SNGL	Single	T HDG	True Heading
SOB	Souls on Board	T/R	Thrust Reverser

TA	Traffic Advisory, Transition Altitude	TOPO	Topographic
TAC	Tactical, Terminal Area Chart	TORA	Takeoff Run Available
TACAN, TCN	Tactical Air Navigation System	TOT	Total
TAF	Terminal Aerodrome Forecast	TPA	Traffic Pattern Altitude
TAS	True Airspeed, Traffic Advisory System	Track	Direction of aircraft movement relative to a ground position; also 'Ground Track'.
TAT	Total Air Temperature	Track Angle Error	The angle difference between the desired track and the current track.
TAWS	Terrain Awareness and Warning System	TRFC	Traffic
TC	Table of Contents	TRK	see also Track
TCA	Terminal Control Area	TRM	Trim
TCAS	Traffic Alert Collision Avoidance System	TRN	Terrain
TCH	Threshold Crossing Height	TRSA	Terminal Radar Service Area
TD	Touchdown	TRUNC	Truncated
TEL	Telephone	TSO	Technical Standard Order
TEMP, TMP	Temperature	TST	Test
TERM	Terminal	TTA	Time-to-Alert
TERR	Terrain	TTK	True Track
T/F	To/From	TTL	Total
TF	Track Between Two Fixes Leg	TTS	Text to Speech
TFR	Temporary Flight Restriction	TUR	Turbine
TGT	Target	TURB	Turbulence
TH	True Heading	TURN	Procedure Turn
THLD	Threshold	TWND	Tailwind
THR	Thrust	TWIP	Terminal Weather Information for Pilots
TIS	Traffic Information Service	TWR	Tower
TIS-B	Traffic Information Service-Broadcast	TWY	Taxiway
TIT	Turbine Inlet Temperature	TX	Transmit
TIZ	Traffic Information Zone	UA	Routine PIREP
TKE	see also Track Angle Error	UAT	Universal Access Transceiver
TL	Transition Level	UAV	Unmanned Airborne Vehicle
TLA	Throttle Lever Angle, Thrust Lever Angle	UHF	Ultra-High Frequency
TMA	Terminal Maneuvering Area	UNABL	Unable
TMR/REF	Timer/Reference	UNAVAIL	Unavailable
TNK	Tank	UNLIM	Unlimited
TO	To, Takeoff	UPLK	Uplink
TOC	Top of Climb, Table of Contents	US	United States
TOD	Top of Descent, Time to TOD	USB V	Upper Sideband Voice
TOGA, TO/GA	Take-Off, Go-Around	USP	Underspeed Protection
TOLD	Takeoff and Landing Data		

USR	User	VLD	Valid
UTC	Coordinated Universal Time	VLOC, VOR/L	VOR/Localizer Receiver
UTM/UPS	Universal Transverse Mercator/ Universal Polar Stereographic Grid	VM	Heading Vector to Manual Termination Leg
UUA	Urgent PIREP	V_{MC}	Minimum Control Speed
V	Volts, Vertical	VMC	Visual Meteorological Conditions
V DEV	Vertical Deviation	V_{MO} (M_{MO})	Maximum Operating Speed
V, Vspeed	Velocity (airspeed)	VNAV, VNV	Vertical Navigation
V₁	Takeoff Decision Speed	V_{NE}	Never-Exceed Speed
V₂	Takeoff Safety Speed	VOL	Volume
V_A	Maneuvering Speed	VOR	VHF Omnidirectional Range
VA	Heading Vector to Altitude Leg	VOR/D	VOR/DME
VAC	Volts Alternating Current	VOR/I	VOR/ILS
VAL	Vertical Alert Limit	VORTAC	VHF Omnidirectional Range Station and Tactical Air Navigation
VAPP	VOR Approach Mode	VPATH, VPTH	Vertical Path
V_{APP}, V_{AC}	Approach Climb Speed	VPL	Vertical Protection Level
VAR	Variable, Variation	VPROF	VNAV Profile, Vertical Profile
VCO	Voice Call Out	V_R	Takeoff Rotate Speed
VD	Heading Vector to DME Distance Leg	VR	Heading Vector to Radial Leg
VDC	Volts Direct Current	V_{REF}	Landing Approach Speed, Reference Landing Speed
VDI	Vertical Deviation Indicator	VRP	Visual Reporting Point
VDL	VHF Datalink	VS	Vertical Speed
V_E, V_{ENR}	Enroute Climb Speed	V_{SB}	Maximum Speedbrake Speed
VECT	Vector	VSD	Vertical Situation Display
VERT	Vertical	VSI	Vertical Speed Indicator
Vertical Figure of Merit	A measure of the uncertainty in the aircraft's vertical position.	VSM	Vertical Separation Minima
Vertical Speed Required	The vertical speed necessary to descend/ climb from a current position and altitude to a defined target position and altitude, based upon current groundspeed.	V_{SR}	Stall Speed
V_{FE}	Maximum Flap Extended Speed	VSR, VS REQ	see also Vertical Speed Required
VFOM	see also Vertical Figure of Merit	V_T	Takeoff Flap Retraction Speed
VFR	Visual Flight Rules	VTE	Vertical Track Error
VHF	Very High Frequency	VTF	Vector to Final
VI	Heading Vector to Intercept Leg	VTK	Vertical Track
VIB	Vibration	V_{TIRE}	Maximum Tire Speed
V_{LE}	Maximum Landing Gear Extended Speed	V_X	Best Angle of Climb Speed
V_{LNDx}	Approach Speed (Flaps at x°)	V_Y	Best Rate of Climb Speed
V_{LO}	Maximum Landing Gear Operating Speed	V_{YSE}	Best Single-Engine Rate of Climb Speed
		W	Watt(s), West

SYSTEM OVERVIEW	WAAS	Wide Area Augmentation System
FLIGHT INSTRUMENTS	WARN	Warning
	WATCH	Weather Attenuated Color Highlight
	WDIR	Wind Direction
	WEP	Wired Equivalent Privacy
	WSPD	Wind Speed
	WGS-84	World Geodetic System - 1984
	WI-FI, WIFI	Wireless Local Area Network based on IEEE 802.11
EIS	WILCO	Will Comply
	WNSHR, WSHEAR	Windshear
AUDIO & CNS	WL	Wings Level
	WOG	Weight on Gear
	WOW	Weight on Wheels
	WPA	Wi-Fi Protected Access
FLIGHT MANAGEMENT	WPT	Waypoint(s)
	WT	Weight
	WUXGA	Widescreen Ultra Extended Graphics Array
HAZARD AVOIDANCE	W/V	Wind Velocity
AFCS		
ADDITIONAL FEATURES		
APPENDICES		
INDEX		

WW	World Wide
WX	Weather
WXR	Weather Radar
XFD	Crossfeed
XFER, XFR	Transfer
XFLOW	Crossflow
XM LTNG	SiriusXM Lightning
XMIT	Transmit
XMSN	Transmission
XPDR	Transponder
XTALK	Cross-Talk
XTE	Crosstrack Error
XTK	Cross-Track, Crosstrack Error
YD	Yaw Damper
Z	Reflectivity Factor
ZPL	Zero Pitch Line

FREQUENTLY ASKED QUESTIONS

If a particular aspect of G1000 NXi operational capability is not addressed by these commonly asked questions or in the index, contact Garmin (see the copyright page or back cover for contact information) or a Garmin-authorized dealer. Garmin is dedicated to supporting its products and customers.

WHAT IS SBAS?

The Satellite Based Augmentation System (SBAS) uses a system of ground stations to correct any GPS signal errors. These ground stations correct for errors caused by ionospheric disturbances, timing, and satellite orbit errors. It also provides vital integrity information regarding the health of each GPS satellite. The signal correction is then broadcast through geostationary satellites. This correction information can then be received by any SBAS-enabled GPS receiver.

SBAS is designed to provide the additional accuracy, availability, and integrity necessary to enable users to rely on GPS for all phases of flight.

There are several SBAS systems serving different parts of the world. The Wide Area Augmentation System (WAAS) is currently available in the United States, including Alaska and Hawaii. The European Geostationary Navigation Overlay Service (EGNOS) offers coverage of Europe, parts of the middle east and northern Africa. The Multi-functional Satellite Augmentation System (MSAS) covers mainly Japan and parts of northern Australia.

HOW DOES SBAS AFFECT APPROACH OPERATIONS?

LP and LPV approaches use the accuracy of SBAS to provide additional precision for lateral (LP, LPV) and vertical (LPV) guidance capability. LPV approaches also allow lower approach minimums. When SBAS is not available, LP and LPV approaches cannot be added to the active flight plan. An LP or LPV approach already loaded will be downgraded to an LNAV or LNAV/VNAV approach, using LNAV or LNAV/VNAV minima.

WHAT IS RAIM AND HOW DOES IT AFFECT APPROACH OPERATIONS?

RAIM is an acronym for Receiver Autonomous Integrity Monitoring. RAIM is a GPS receiver function that performs the following functions:

- Monitors and verifies integrity and geometry of tracked GPS satellites
- Notifies the pilot when satellite conditions do not provide the necessary coverage to support a certain phase of flight
- Predicts satellite coverage of a destination area to determine whether the number of available satellites is sufficient to satisfy requirements



NOTE: If RAIM is not predicted to be available for the final approach course, the approach does not become active, as indicated by the "RAIM not available from FAF to MAP" message and the LOI annunciation flagging on the HSI.

For RAIM to work correctly, the GPS receiver must track at least five satellites. A minimum of six satellites is required to allow RAIM to eliminate a single corrupt satellite from the navigation solution.

RAIM ensures that satellite geometry allows for a navigation solution calculation within a specified protection limit (2.0 nm for oceanic and en route, 1.0 nm for terminal, and 0.3 nm for non-precision approaches). The system monitors RAIM and issues an alert message when RAIM is not available (see Appendix A). Without RAIM, GPS position accuracy cannot be monitored. If RAIM is not available when crossing the FAF, the pilot must fly the missed approach procedure.

WHAT IS GSL ALTITUDE?

GSL (Geodetic Sea Level) altitude is the height above Mean Sea Level (MSL), as calculated geometrically, generally using a global positioning system (GPS) as the primary data source. The calculated result may or may not include a barometric component, but the primary source is geometric.

WHY ARE THERE NOT ANY APPROACHES AVAILABLE FOR A FLIGHT PLAN?

Approaches are available for the final destination airport in a flight plan or as a direct-to (keep in mind that some VOR/VORTAC identifiers are similar to airport identifiers). If a destination airport does not have a published approach, the system indicates “NONE” for the available procedures.

WHAT HAPPENS WHEN AN APPROACH IS SELECTED? CAN A FLIGHT PLAN WITH AN APPROACH, A DEPARTURE, OR AN ARRIVAL BE STORED?

When an approach, departure, or arrival is loaded into the active flight plan, a set of approach, departure, or arrival waypoints is inserted into the flight plan, along with a header line showing the title of the selected instrument procedure. The original en route portion of the flight plan remains active, unless the instrument procedure is activated. This may be done either when the procedure is loaded or at a later time.

Flight plans can also be stored with an approach, a departure, or an arrival. Note the active flight plan is erased when the system is turned off. Also, the active flight plan is overwritten when another flight plan is activated. When storing flight plans with an approach, a departure, or an arrival, the system uses the waypoint information from the current database to define the waypoints. If the database is changed or updated, the system automatically updates the information, provided the procedure has not been modified. Should an approach, departure, or arrival procedure no longer be available, the flight plan becomes locked until the procedure is deleted from the flight plan.

WHAT DOES THE OBS SOFTKEY DO?

The **OBS** Softkey is used to select manual sequencing of waypoints. Activating OBS mode sets the current active-to waypoint as the primary navigation reference and prevents the system from sequencing to the next waypoint in a flight plan. When OBS mode is cancelled, automatic waypoint sequencing is continued, and the system automatically activates the next waypoint in the flight plan once the aircraft has crossed the present active waypoint.

Normal (OBS not activated)	OBS
• Automatic sequencing of waypoints	• Manual sequencing - 'holds' on selected waypoint
• Manual course change on HSI not possible	• Manually select course to waypoint from HSI
• Always navigates 'TO' the active waypoint	• Indicates 'TO' or 'FROM' waypoint
• Must be in this mode for final approach course	• Cannot be set for final approach course or published holding patterns

When OBS mode is active, the system allows the pilot to set a desired course to/from a waypoint using the **CRS/BARO** Knob and HSI (much like a VOR).

The most common application for using the **OBS** Softkey is the missed approach. The system suspends automatic waypoint sequencing (indicated by a ‘SUSP’ annunciation placed on the HSI) when the missed approach point (MAP) is crossed. This prevents the system from automatically sequencing to the missed approach holding point (MAHP). During this time, the **OBS** Softkey designation changes to **SUSP**. Pressing the **SUSP** Softkey reactivates automatic waypoint sequencing. The **OBS** Softkey then resumes its normal functionality.

WHY DOES THE SYSTEM NOT AUTOMATICALLY SEQUENCE TO THE NEXT WAYPOINT?

The system only sequences flight plan waypoints when automatic sequencing is enabled (i.e., no “OBS” or “SUSP” annunciation). For automatic sequencing to occur, the aircraft must also cross the “bisector” of the turn being navigated. The bisector is a line passing through the waypoint common to two flight plan legs at an equal angle from each leg.

HOW CAN A WAYPOINT BE SKIPPED IN AN APPROACH, A DEPARTURE, OR AN ARRIVAL?

The system allows the pilot to manually select any approach, departure, or arrival leg as the active leg of the flight plan. This procedure is performed on the MFD from the Active Flight Plan Page by highlighting the desired waypoint and pressing the **ACT Leg** Softkey then the **ENT** Key to approve the selection. The GPS then provides navigation along the selected flight plan leg.

WHEN DOES TURN ANTICIPATION BEGIN?

The system smooths adjacent leg transitions based on a normal 15° bank angle (with the ability to roll up to 30°) and provides three pilot cues for turn anticipation:

- A waypoint alert (‘Next DTK ####° in # seconds’ or ‘Next HDG ####° in # seconds’) appears on the PFD 10 seconds before the turn point and flashes as it counts down to zero.
- A flashing turn advisory (‘Turn [right/left] to ####° in # seconds’) appears on the PFD 10 seconds before the turn and flashes as it counts down to zero. ‘Turn [right/left] to ####° now’ or ‘Next [DTK/HDG] to ####° now’ is displayed when the pilot is to begin the turn and the HSI (GPS mode) automatically sequences to the next DTK or HDG value.
- The To/From indicator on the HSI flips momentarily to indicate the midpoint of the turn has been crossed.

WHEN DOES THE CDI SCALE CHANGE?

Once a departure is activated, the G1000 NXi Course Deviation Indicator (CDI) full scale deflection is set to 0.3 nm. The CDI scale changes to 1.0 nm (terminal mode) then ramps up to 2.0 nm (enroute mode) at 30 nm from the departure airport. When 31 nm from the destination, the CDI scale smoothly transition from 2.0 nm back to 1.0 nm (terminal mode). At 2.0 nm before the FAF during an active approach, the CDI scale transitions down further based on the type of approach activated (LNAV, LNAV/VNAV, LP, LPV). When a missed approach is activated, the CDI is set to 0.3 nm. See the Flight Instruments Section for more details on CDI scaling.

WHY DOES THE HSI NOT RESPOND LIKE A VOR WHEN OBS MODE IS ACTIVE?

Unlike a VOR, the CDI scale used on GPS equipment is based on the crosstrack distance to the desired course, not on the angular relationship to the destination. Therefore, the CDI deflection on the GPS is constant regardless of the distance to the destination and does not become less sensitive when further away from the destination.

WHAT IS THE CORRECT MISSED APPROACH PROCEDURE? HOW IS THE MISSED APPROACH HOLDING POINT SELECTED?

To comply with TSO specifications, the system does not automatically sequence past the MAP. The first waypoint in the missed approach procedure becomes the active waypoint when the **SUSP** Softkey is selected *after* crossing the MAP. All published missed approach procedures must be followed, as indicated on the approach plate.

To execute the missed approach procedure prior to the MAP (not recommended), select the Active Flight Plan Page and use the **ACT Leg** Softkey to activate the missed approach portion of the procedure.

AFTER A MISSED APPROACH, HOW CAN THE SAME APPROACH BE RE-SELECTED? HOW CAN A NEW APPROACH BE ACTIVATED?

NOTE: *Do not attempt to reactivate the current approach prior to crossing the missed approach point (MAP). If an attempt to do so is made, an alert message "Are you sure you want to discontinue the current approach?" appears. The system directs the pilot back to the transition waypoint and does not take into consideration any missed approach procedures, if the current approach is reactivated.*

After flying the missed approach procedure, the pilot may reactivate the same approach for another attempt by pressing the **PROC** Key. Once the clearance is given for another attempt, activate the approach by highlighting 'Activate Approach' using the large **FMS** Knob and pressing the **ENT** Key. The system provides navigation along the desired course to the waypoint and rejoins the approach in sequence from that point.

To activate a new approach for the same airport, select the new procedure by pressing the **PROC** Key. Choose 'Select Approach', select the desired approach from the list shown, and press the **ENT** Key. Select the desired transition, then activate the approach using the **ENT** Key.

To activate a new approach to a different airport, press the **Direct-to** Key and select the desired airport using the **FMS** Knobs. Press the **ENT** Key to accept the selected airport, then follow the steps in the preceding paragraph to select an approach for the new airport.

MISCELLANEOUS MAP SYMBOLS

Item	Symbol
ARTCC Frequency or FSS Frequency	
Map Pointer (when panning)	
Elevation Pointer (on Topography Scale when panning)	
Measuring Pointer	
Wind Vector	
Overzoom Indicator	
User Waypoint	
Vertical Navigation Along Track Waypoint	
Parallel Track Waypoint	
Unanchored Flight Path Waypoint	
Top of Climb	
Bottom of Climb	
Top of Descent (TOD)	
Bottom of Descent (BOD)	
Navigating using Dead Reckoning	

SYSTEM OVERVIEW
FLIGHT INSTRUMENTS
EIS
AUDIO & CNS
FLIGHT MANAGEMENT
HAZARD AVOIDANCE
AFCS
ADDITIONAL FEATURES
APPENDICES
INDEX

Blank Page

A

Activating the SiriusXM Weather Service	243	Annunciations	
Active frequency	108	Abnormal GPS	83
ADF 112		Altitude Alerting	79
AC-U-KWIK	402, 458	Baro Transition Alert	79
Additional Features	379	Low Altitude	80
ADF		Marker Beacon	79
ADF mode	112, 115	Minimum Altitude	81
ANT mode	115	Barometric	81
Volume	112	Temperature-Compensated	81
ADF audio	108	system	446
ADF/BFO	115	System	8, 10
ADF frequency tuning	114	Test tone	445
ADF volume	115	Test Tone	12
ADS-B Traffic	331	ANT/BFO	115
ADS-R	332	AOPA	458
AHRS	447, 450, 451	AP DISC Switch	349
AIRB	335	Approach	484
Airport		Approaches	
Directory	156	Activating	230
Information	160	Loading	229
Nearest	158	Missed Approach	231
Origin Auto-designation	181	Removing	230
Airport Directory	402	Approach Frequency Automatic Transfers	111
Airspace	169	Approach Modes	367
Altitude Buffer	170	AP TRIM Switch	349
Nearest	171	Arrivals	223, 224, 225
Smart Airspace	172	Loading	224
Symbols	146	Removing	225
Airspace Alerts	170	Attitude and Heading Reference System (AHRS)	12
Airspeed Indicator	44, 46	Attitude Indicator	48
Airspeed Trend Vector	46	Audio alerting system	445
Vspeed Reference Bugs	46	Automatic Direction Finder (ADF)	57
Airways		Automatic Flight Control System (AFCS)	347
Collapsing/Expanding	192	Alerts	375
In a Flight Plan	189	Combination Modes	362
Symbols	150	Controller	348
Alerts		Lateral Modes	358
Audio	36	Navigation Modes	360
Along Track Offset	193, 194	Status Box	351
Altimeter	44, 49	Vertical Modes	353
Altitude Selection (Bug)	50	Autonomi	379, 432
Altitude Trend Vector	49	Autopilot (AP)	347
Barometric Setting	49	Operation	373
STD BARO	49	Auto-tuning	111
Complementary Unit Overlay	50	Auto-tuning, COM	102
Altitude Constraint	212	Auto-tuning, NAV	108
Enabling VNV Guidance	211	Auto Zoom	138
Manually Designating	214	Aviation Symbols	146
Altitude Hold Mode (ALT)	355	Avidyne TAS600 Traffic	321

B

Backcourse Approach	369
Barometric Altimeter Setting	44, 49
Bearing/Distance, Measuring	142
Bearing Information Window	57
Bearing Pointer	57
Blue-Select Mode	128
Bluetooth Pairing	127
Bus voltage	92

C

CAS Messages	444
Cell Movement (SiriusXM)	278
Charts Source	383
ChartView	384
Clearance Recorder	126
Closest Point	196
Cloud Tops	279
Cloud Tops (SiriusXM)	275
Combination Modes	362
COM Channel Spacing	106
Command Bars	352
COM Tuning Failure	131
Conflict Situational Awareness (CSA)	333
Connex	430
Connex Data Requests	259
Contacts	413
Control Wheel Steering (CWS)	374
Coolant temperature	89
Correlation	333
County Warnings (SiriusXM)	288
Course	
Pointer	54
Selection	55–56
Course Deviation Indicator (CDI)	54, 58–60
Crosstrack Error	58
Flight Phase	58, 62
Lateral Deviation Scale	54
Navigation Source	54, 59
Scaling	60
Crew Alerting System (CAS)	443
Inhibits	444
Crew Profiles	30
CWS Button	349
Cyclone (SiriusXM)	289

D

Database Information	439
Database Management	457
Deleting Databases	467
Magnetic Field Variation Database	468
Updating with Garmin Pilot	461
Updating with SD card	458
Database Management	438
Data Link Lightning (SiriusXM, Garmin Connex)	276
Data Link Receiver Troubleshooting	441
Datalink Services	410
Dead Reckoning Mode	83
DEC FUEL Softkey	93
Deleting	
Deleting a Stored Flight Plan	208
Deleting the Active Flight Plan	206
Departures	220
Loading	221
Removing	222
Direct-to	173, 174, 175, 176, 177
Display and Key Backlighting (Brightness)	41
Display Backup	9
Displaying Traffic Data	315
Display Panes	27
Display Units (Units of Measure)	34
Distance Measuring Equipment (DME)	58
Information Window	57
DME	
Tuning Mode	112
DME Arc	371
DME Audio	108
DME Tuning	116

E

Echo Tops (SiriusXM)	274
Electrical Group	92
Electronic Charts	383
Electronic Checklists	436
Emergency Procedures	437
Electronic Stability and Protection (ESP)	48, 432
Endurance, Calculated (ENDUR)	93
Engine Display	88
Engine Indication System (EIS)	87–94
Engine Load Indicator	89, 91
Entering Flight ID	117
Estimated Position Error (EPE)	15

F

Field of View (SVT)	153
FIS-B Weather Status	296
Flight Data Logging	408
Flight Director (FD)	347, 350
Flight Director Modes	351
Flight Level Change Mode (FLC)	357
Flight Path Angle (FPA)	212
Flight Plan	
Storing	484
Flight Plan	
Activating a Flight Plan Leg	193
Adding Airways	189
Adding Waypoints	185
Comment Changes	209
Creating	184
Deleting	206, 208
Flight Plan View	181
Importing/Exporting Flight Plans	201
Inverting a Flight Plan	206, 208
Leg Type	178
Origin Auto-designation	180
Parallel Track	194
Retention after Shut Down	178
Split Screen	182
Waypoint/Airway Modifications	185
Flight Plan Importing	430
Flight Stream 510	2
FliteCharts	392
Fluid Group	91
Fly-By Waypoint	189
Fly-Over Waypoint	189
Freezing Level (SiriusXM)	285
Frequency Spacing	106
Frequently Asked Questions	483
Fuel	
Calculations	93
Efficiency	236
Endurance	236
Flow indicator	89
Quantity	89
Remaining	92, 236
Required	236
Statistics	236
Temperature indicator	89
Used	92
Fuel on Board	236

G

Garmin Connex Weather	245
Garmin Pilot Application	430
Geodetic Sea Level (GSL)	304
Glidepath Indicator	52
Glidepath Mode (GP)	368
Glideslope Indicator	51
Glideslope Mode (GS)	370
Global Positioning System (GPS)	
Receiver	14
Receiver Autonomous Integrity Monitoring (RAIM)	
Prediction	16
Satellite-Based Augmentation System (SBAS)	18
Satellite Constellation Diagram	15
Satellite Signal Status	15
Satellite Signal Strength	18
GO AROUND Button	349
Go Around Mode (GA)	372
GPS Approach Mode	368
GPS Navigation Mode	360

H

Heading	44
Heading Bug	44
Heading Select Mode (HDG)	359
High Airspeed Protection	435
HI SENS	112
Holding, User Defined	197
Horizontal Situation Indicator (HSI)	44, 53
HSI Double Green Arrow	108
HSI Magenta Arrow	108
HSI Map	133
HSI Single Green Arrow	108
HW Mismatch	452

I

IDENT function	118
IFR Charts	399
Importing and Exporting Flight Plans	201
Incoming Calls	414
Inset Map	133
Intercom	123
Intercom Split COM Mode	125
Intercom System (ICS)	123
Intersection Information	160
Inverting a Flight Plan	206, 208
IOI	311
Iridium Transceiver	410

K

Key 475

L

Land Symbols 145
 Lateral Modes 358
 Line Replaceable Units (LRUs) 1
 Localizer Approach Mode (LOC) 369
 LO SENS 112

M

Manual Electric Trim (MET) 347
 Map
 Declutter 148
 Panning 140
 Settings 147
 Symbols 145
 Marker Beacon 111
 MASQ processing 95
 Menus 24
 METARs and TAFs 281
 Metric Units 49
 Minimum Altitude Alerting 81
 Missed Approach 231, 232
 MKR/MUTE 112
 Mode S 117
 Mode Selection Softkeys 117, 118
 Motion Vectors 339
 MSA (Minimum Safe Altitude) 135
 Multifunction Display (MFD)
 Controls 4
 Page Groups 24
 Split Screen Functionality 27
 Music Audio 129

N

National Weather Service (NWS) 288
 NAV1 Audio 108
 NAV2 Audio 108
 Navigation Mode Selection 108
 Navigation Source 54
 Nav Radio Selection 108
 NDB Information 160
 Nearest
 Airport 158, 159, 160
 Airport Minimum Runway Length 160
 Airport Surface Matching 160
 Intersection/NDB/VOR/VRP 162

NEXRAD 271
 NEXRAD (FIS-B) 266
 NEXRAD (SiriusXM) 262
 NextGen 331

O

OBS Mode 63
 Oil
 Pressure Indicator 89, 91
 Temperature Indicator 89, 91
 Omni Bearing Selector (OBS) 484–485
 Outgoing Calls 415
 Overspeed Protection 376

P

Pairing a Bluetooth Device 126
 Parallel Track 194
 Pending Flight Plan 203
 PFD Map
 HSI Map 133
 Inset Map 133
 PIREPS and AIREPS 292
 Pitch Hold Mode (PIT) 353
 Primary Flight Display (PFD)
 Controls 4

R

Receiver Autonomous
 Integrity Monitoring (RAIM) 483
 Reversionary mode 131
 Reversionary Mode 9, 84
 ROC 311
 Roll Hold Mode (ROL) 358

S

SafeTaxi 380
 Satellite Telephone 410
 SBAS 452, 483
 Scheduler 39–40
 Secure Digital (SD) Cards 6, 408
 Selected Altitude 50
 Selected Altitude Capture Mode (ALTS) 354
 Selected Altitude Intercept Arc 151
 Sequencing, Automatic 485
 SIGMET 280
 SIGMETs and AIRMETs 280
 SiriusXM Radio Entertainment 129
 SiriusXM Satellite Radio 403

SiriusXM Weather		
AIREPs	292	
AIRMETs	280	
Cell Movement	278	
Cloud Tops	276	
County Warnings	288	
Cyclones & Hurricanes	289	
Echo Tops	274	
Freezing Level	285	
Icing	290, 294	
Lightning	277	
PIREPs	292	
SIGMETs	280	
Surface Analysis	283	
Turbulence	291	
Winds Aloft	286	
Slip/Skid Indicator	48	
Smart Airspace	172	
Softkeys		
EIS	90	
MFD	22	
PFD	19	
Split-PA Mode	123	
Split Screen	182, 183	
Standby Database	459	
Standby frequency	108	
ADF	112	
Stereo headsets	122	
Stuck Microphone	131	
SURF	335	
Surface Analysis	283	
Symbols, Map	487	
Synthetic Vision Technology (SVT)	67, 454	
Airport Signs	74	
Field of View	77	
Flight Path Marker (FPM)	70	
Horizon Heading	69	
Pathways	70	
Runways	75	
Terrain and Obstacle Alerting	76	
Traffic	74	
Troubleshooting	84	
Zero Pitch Line	69	
System		
Block Diagram	3	
Settings	28	
Status	11	
Time	34	
System messages	446	
System Status (TIS)	319	
T		
Tachometer	89, 91	
Takeoff Mode (TO)	372	
TAS Traffic		
Non-Threat Traffic	322	
PA	322	
Proximity Advisory	322	
Telephone Communication	412	
Temperatures	65	
International Standard Atmosphere (ISA)	65	
Outside Air Temperature (OAT)	65	
Terminal Aerodrome Forecast (TAF)	282	
Terrain	449	
Terrain Page	309	
Terrain Proximity	304	
Text Message Symbols	420	
Text Messaging (SMS)	419	
Predefined Text Messages	422	
Timer Generic	65	
Timers	37	
TIS Alerts	317	
TOPO Data	144	
TOPO Scale	144, 145	
Total flight hours	92	
Track Indicator	54, 55	
Traffic Information Service-Broadcast (TIS-B)	333	
Traffic Map Page	316	
Transponder Altitude Mode	119	
Transponder Code Entry	120	
Transponder Data Box	95	
Transponder Failure	131	
Transponder Standby Mode	118	
Trend Vector		
Airspeed	46	
Altitude	49	
Turn Rate	56	
Trip Planning	234, 235, 236	
Trip Statistics	38, 235, 236	
True Airspeed (TAS)	46, 447	
Turbulence (SiriusXM)	291	
Turn Anticipation	485	
Turn Rate Indicator	44, 56	

U

Unusual Attitudes	84, 85
User-Defined Holding Pattern.....	197
User Waypoints	165
Creating	165
Editing	167

V

Vertical Modes	353
Vertical Navigation Modes.....	363
Vertical Navigation (VNV).....	210
Direct-to.....	211
Enabling Within a Flight Plan	211
Vertical Navigation VNV Indications	
Required Vertical Speed Indicator (RVSI).....	51
Target Altitude	51
Vertical Deviation Indicator (VDI).....	51
Vertical Path Tracking Mode (VPTH)	363
Vertical Situation Display (VSD).....	213, 214, 215, 216, 217
Messages	216
Vertical Speed Indicator (VSI).....	44, 51
Vertical Speed Mode (VS)	356
VFR Charts.....	399
VFR Code.....	120
VNV Target Altitude Capture Mode (ALTV)	366
Voice Alerts, TIS Traffic	317
Volume level	
ADF	112, 115
VOR Approach Mode (VAPP).....	367
VOR Information	160
VOR Navigation Mode.....	360
VOR Selection	108
VRP Information.....	160
Vspeed References	46
VS TGT	212

W

WAAS	483
Waypoints	
Airports	155
Automatic Sequencing.....	484, 485
Creating User Waypoints.....	165
Duplicates	154
Fly-Over.....	188
Information	160
Selection Submenu	174, 186, 187
Skipping.....	485
User Waypoints.....	161, 165, 167
Waypoint Selection Submenu.....	174, 186, 187
WiFi Database Importing	431
Wind Data	66
Winds Aloft	286
Wind Vector on MFD	152



Garmin International, Inc.
1200 East 151st Street
Olathe, Kansas 66062, U.S.A.

Garmin AT, Inc.
2345 Turner Road SE
Salem, OR 97302, U.S.A.

Garmin (Europe) Ltd.
Liberty House, Hounsdown Business Park
Southampton, Hampshire SO40 9LR U.K.

Garmin Corporation
No. 68, Zhangshu 2nd Road
Xizhi District,
New Taipei City, Taiwan

Contact Garmin Product Support or view warranty information at flygarmin.com.